

Safe Streets for Seniors

Hylan – New Dorp, Staten Island

Proposed Improvements Community Board 2



*New York City
Department of Transportation
Janette Sadik-Khan, Commissioner*

April 21, 2009

Early Action Improvements Implemented

- Signals re-timed for seniors at the 13 signalized intersections in the study area - *December*
 - More time to cross the major street was given at 10 intersections along Hylan Blvd
- Pedestrian signal was installed at New Dorp Ln and 10th St - *January*
- Signal timing was modified to incorporate a three phase signal operation at New Dorp Ln and Clawson St - *February*

Summary of Improvements

Hylan – New Dorp, Staten Island

- 3 new/upgraded *Yield to Pedestrian in Crosswalk* sign installations
- Pedestrian fencing on Hylan Blvd between New Dorp Lane and Ross Avenue
- 7 new high visibility crosswalks with advance stop bars
- Removal of an uncontrolled school crosswalks at 2 intersections
- 1 new pedestrian refuge island
- 2 new median extensions


High Visibility Crosswalks

- Upgrade from normal to high visibility or School crosswalks* and install advanced stop bars at the following locations:
 - New Dorp Lane and 10th Street
 - Hylan Boulevard and Seaver Avenue
 - Hylan Boulevard and Jefferson Avenue
 - Hylan Boulevard and Midland Avenue
 - Hylan Boulevard and Burbank Avenue*
 - Hylan Boulevard and Ross Avenue
 - Hylan Boulevard and Alison/Ebbitts Avenue

Hylan Blvd – New Dorp Lane to Ross Avenue



- Install pedestrian fencing along Hylan Blvd in existing median between New Dorp Lane and Ross Ave
- Install *Yield to Pedestrian in Crosswalk* signs for Hylan Blvd vehicles turning onto Coddington Ave

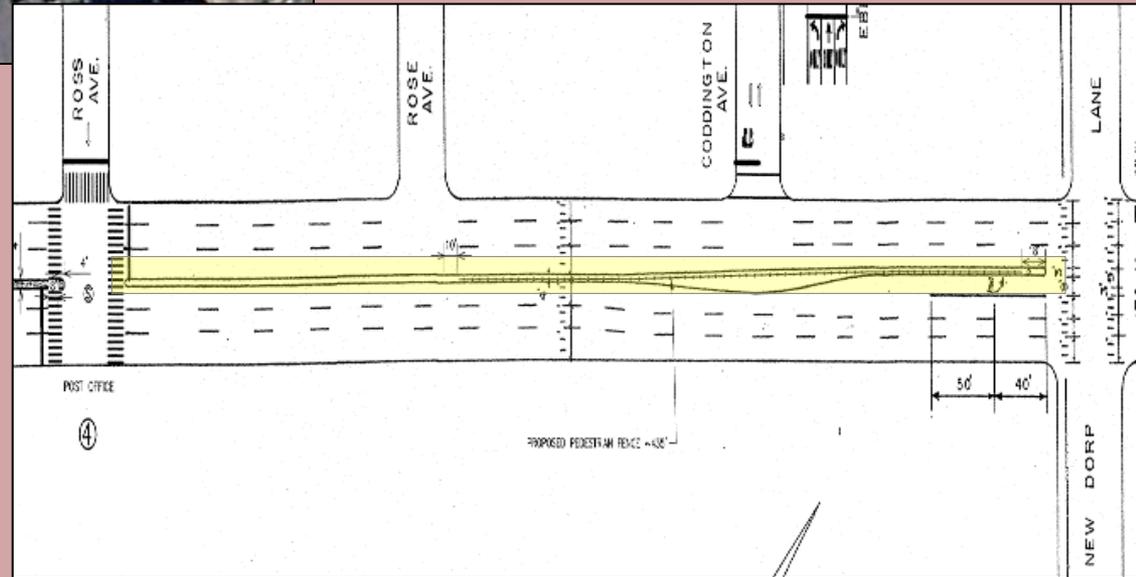

Hylan Blvd & Midland Ave




AFTER

- Construct green pedestrian refuge island in west crosswalk
- Upgrade west crosswalk to School crosswalk



BEFORE

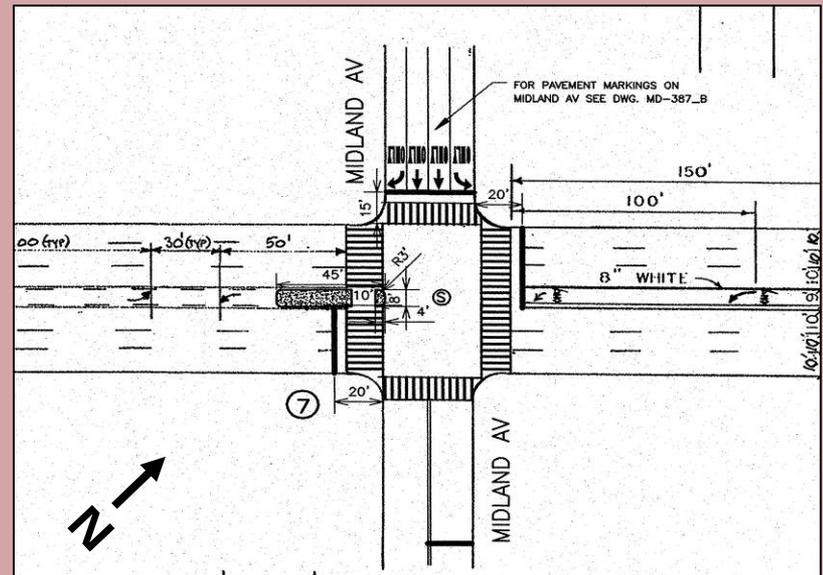

Hylan Blvd & Burbank Ave



BEFORE



AFTER

- Construct median extension in east crosswalk
- Upgrade east crosswalk from Standard to School and install advance stop bars

Hylan Blvd & Ross Ave



- Install median extension in west crosswalk
- Upgrade to high visibility crosswalks and install advanced stop bars on Ross Ave at Hylan Blvd

Timeline

Hylan - New Dorp Senior Area Timeline

Tasks	2008	2009					
	DEC	JAN	FEB	MAR	APR	MAY	JUN
Early Action Items							
Time Signals for Seniors 3ft/Sec							
Install Ped Head at New Dorp Ln & 10th St							
Modified signal timing at New Dorp Lane & Clawson St							
Short Term Improvements							
Install Yield to Ped in Crosswalk signs							
Refurbish markings and upgrade Crosswalks							
Install Pedestrian Fence on Hylan Blvd							
Construction							
Pedestrian Island at Hylan Blvd and Midland Ave							
Median Extension at Hylan Blvd & Burbank Ave							
Median Extension at Hylan Blvd & Ross Ave							