

# **BRONX COMMUNITY BOARDS #12**

---

# **UPCOMING PROJECTS IN CB12:**


**PROJECT ID: HED562, QED1063A**  
**BOROUGH OF THE BRONX**

# AGENDA:

- **Project #1– New Trunk WM in E 233rd Street- HED562**
- **Project #2 – Install Distribution WM in Bronx & Queens QED1063A**
  - **Overview**
  - **Goals & Benefits**
  - **Limits (Map)**
  - **Impacts & Mitigation**
  - **Outreach – Keeping You Informed**
  - **Scheduled Milestones**

# PROJECT #1 OVERVIEW: NEW TRUNK WM INSTALLATION IN E 233RD STREETS

- #HED-562- New 48" Trunk Water Main installation upgrades in 233rd Street in CB12x
- Procurement Phase
- Construction FY25
- \$60 Million

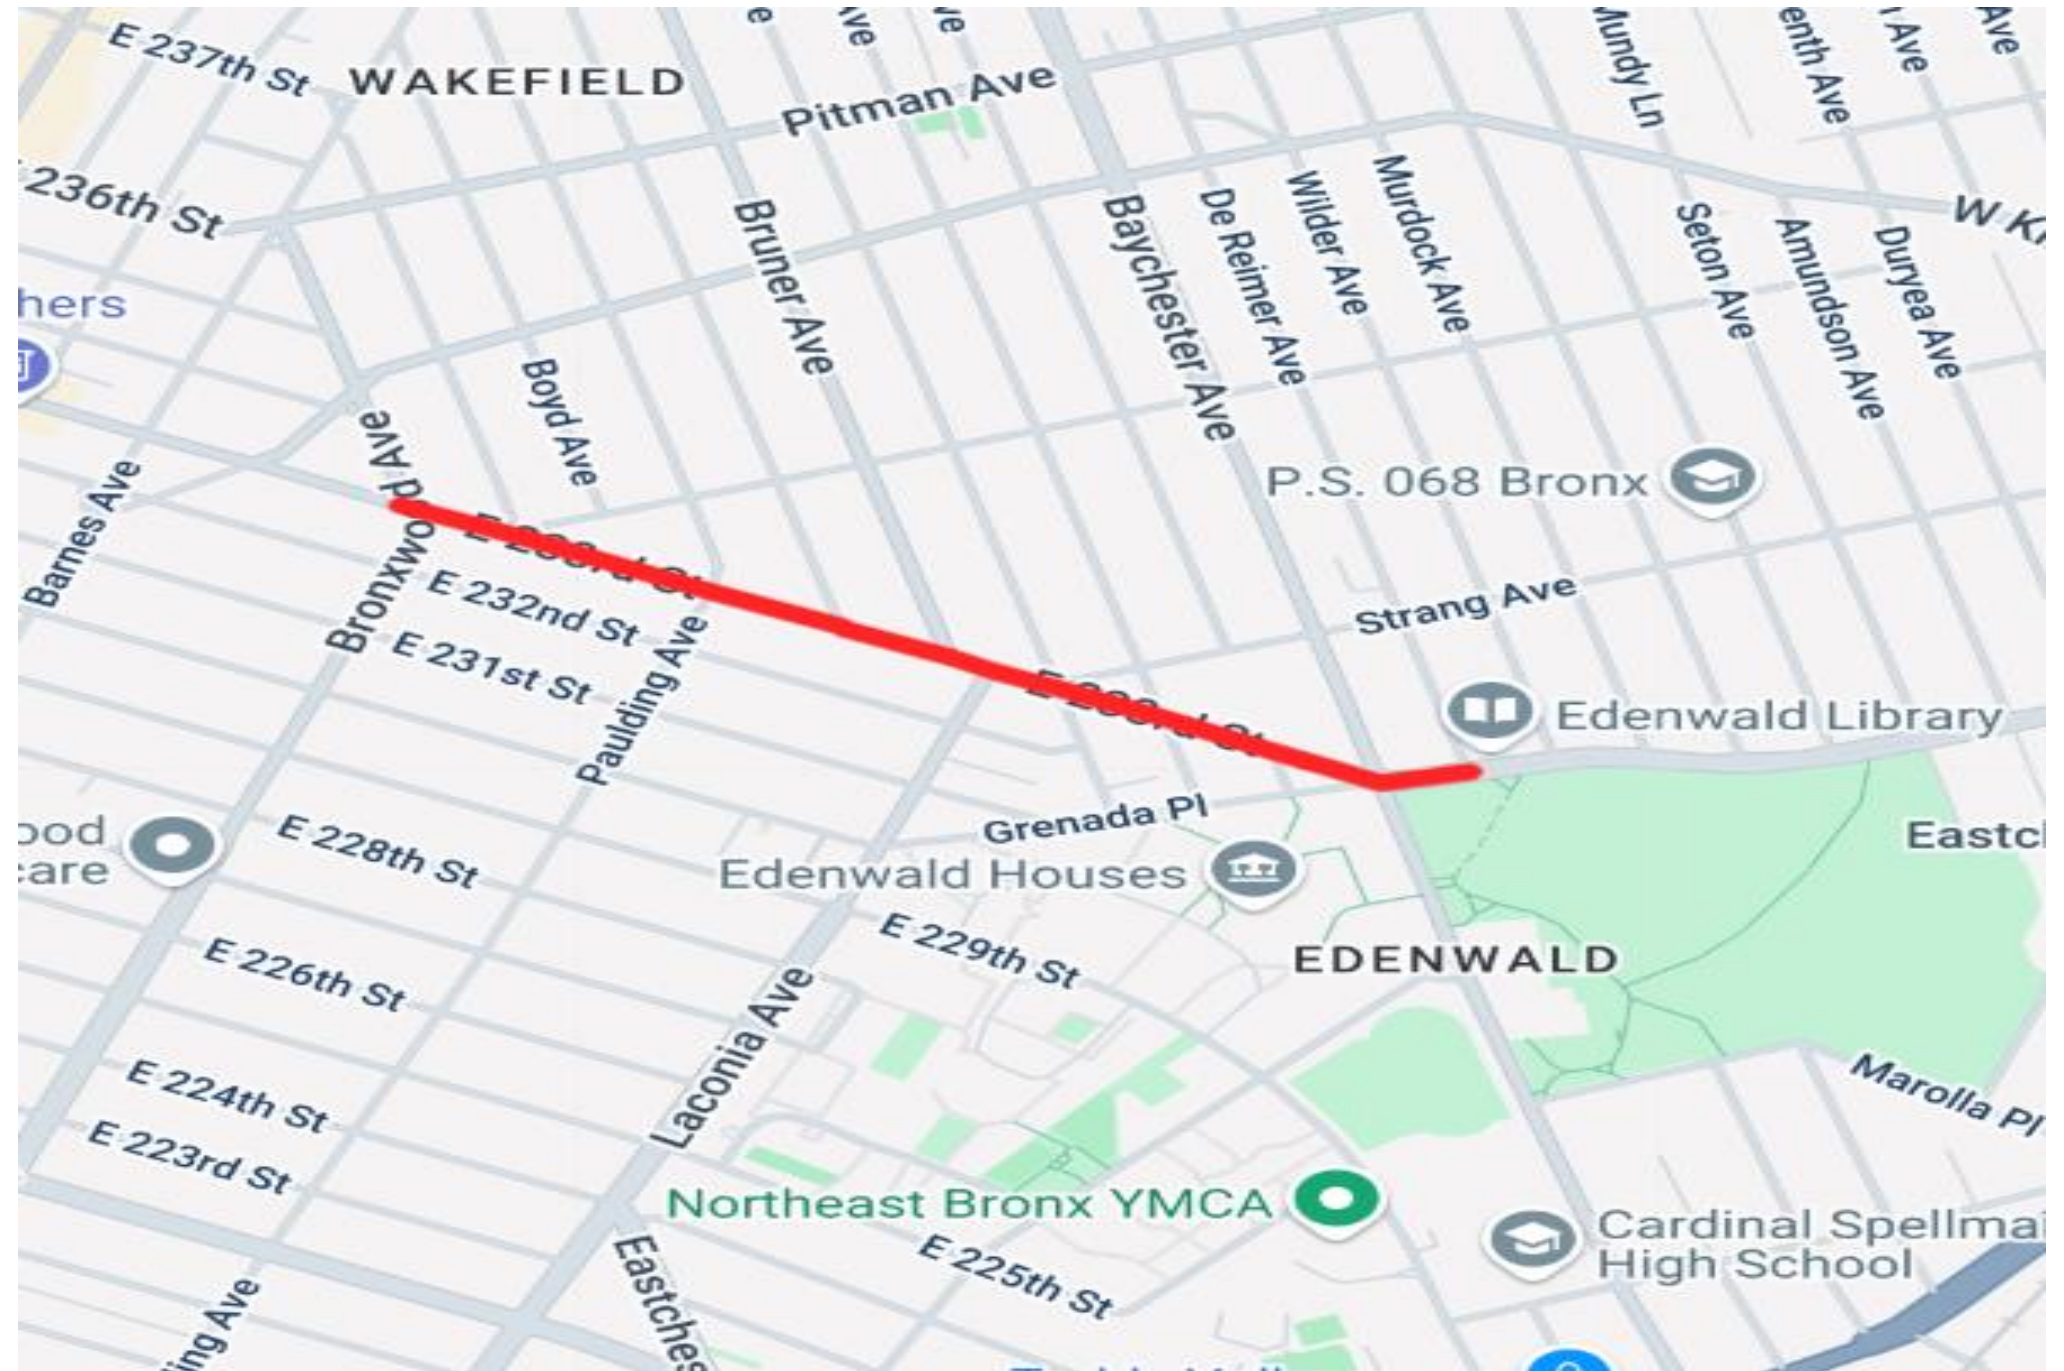

# PROJECT #1 - GOALS: E. 233RD STREET

- Provide high quality water and improve fire protection.
- Replace old, unlined or undersized cast iron watermain and sewers


## PROJECT #1 - SCOPE: -

- **Water Main** – 48" Trunk WM; (20", 12", 8") Distribution WM to improve water distribution
- **Sewers** – replace/repair is required to rectify broken and deficient pipes within project limit
- **Catch-Basins** – diverts storm water to sewers upgrading
- **Fire hydrants** – Improves Fire Protection
- **Curbs and Sidewalks** - diverts stormwater to catch basins improving drainage and to improve roadways, curbs, and sidewalks
- **Roadway** - improves surface grading and ponding issues
- **Trees** – 3 to 4 trees will be removed by the Shaft Chamber location



# PROJECT #1 LIMITS: CB12

- E 233<sup>rd</sup> Street between Bronxwood Ave and Wilder Ave
- Strange Avenue between Ely Avenue and Grace Avenue
- Edenwald Avenue between Digney Avenue and Boyd Avenue
- Intersection of E 233<sup>rd</sup> Street and:
  - Bronxwood Avenue
  - Edenwald Avenue
  - Paulding Avenue
  - Laconia Avenue
  - Ely Avenue
  - Grace Avenue
  - Edison Avenue
  - Baychester Avenue
  - De Reimer Avenue
  - Wickham Avenue
  - Bruner Avenue

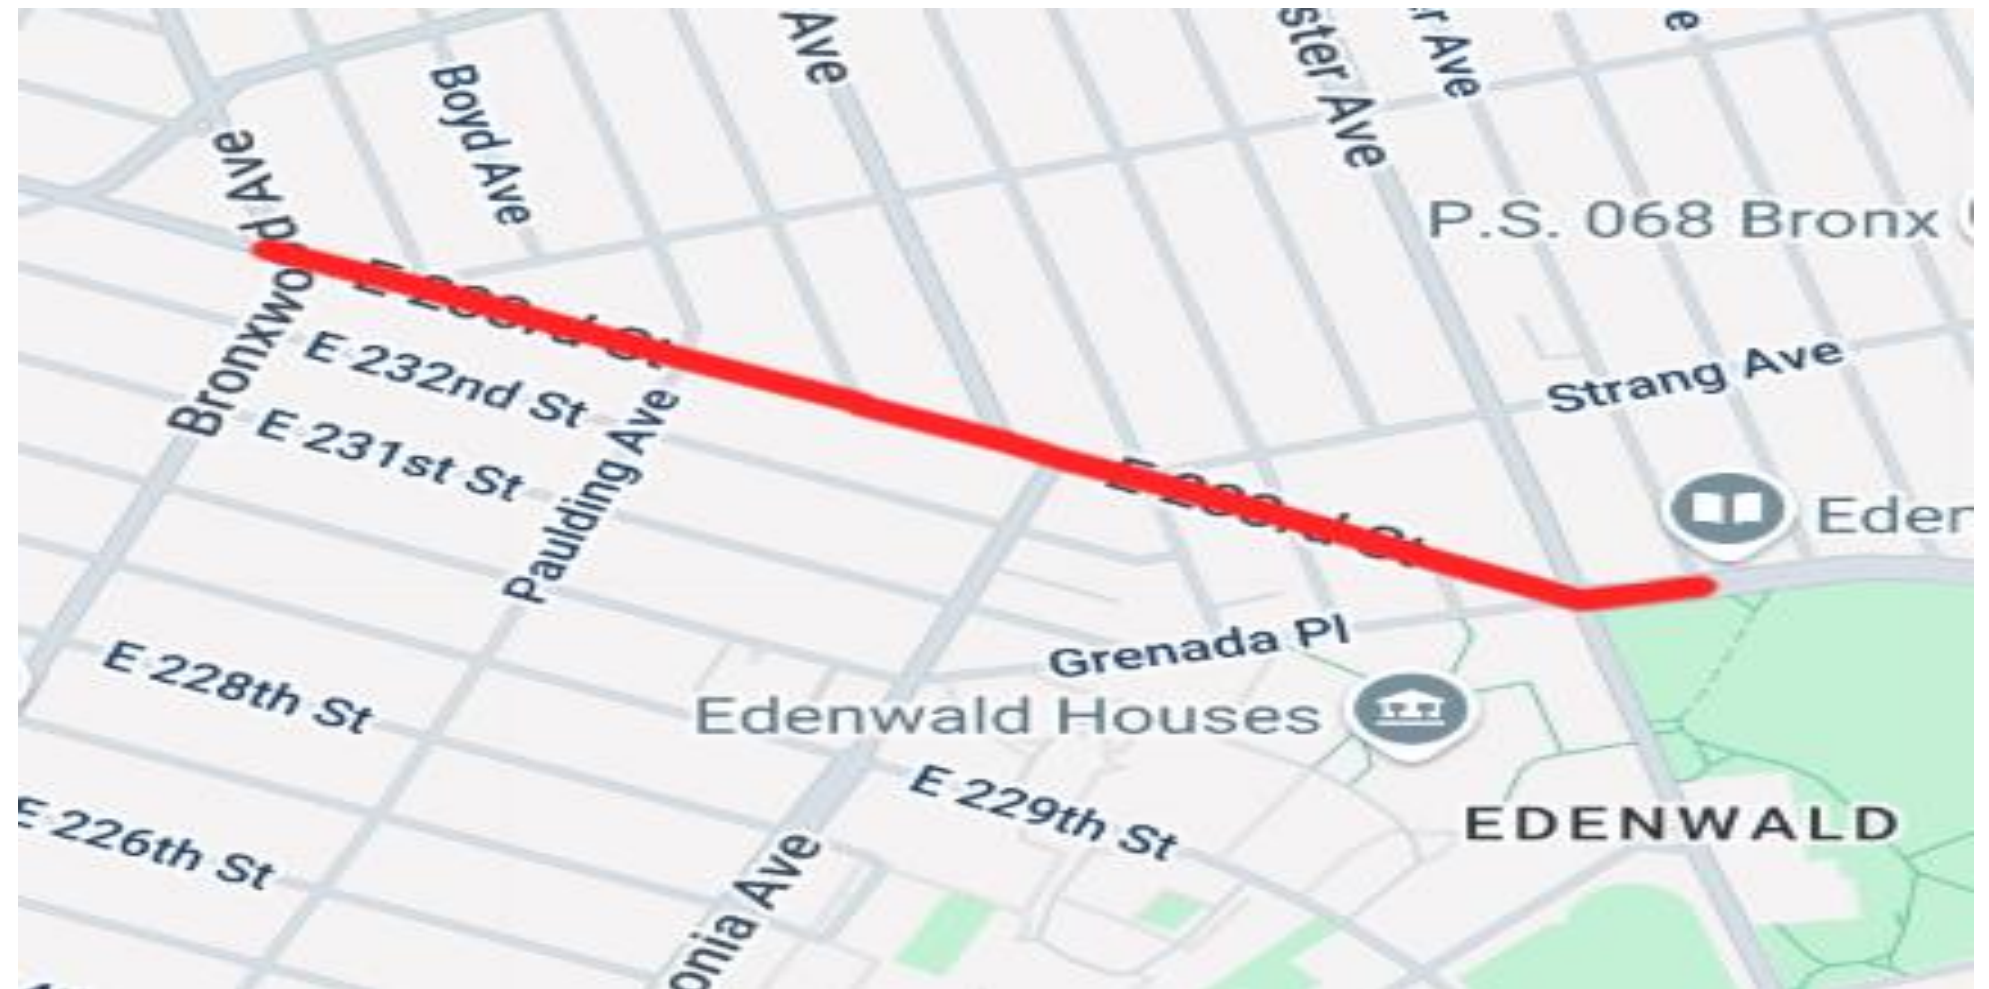


# PROJECT SCHEDULE #1

- **Design Completion – Fall 2024**

Bid Date- February 2025

**Construction Start – Summer 2025**


- **Anticipated Construction Completion – Summer 2028**

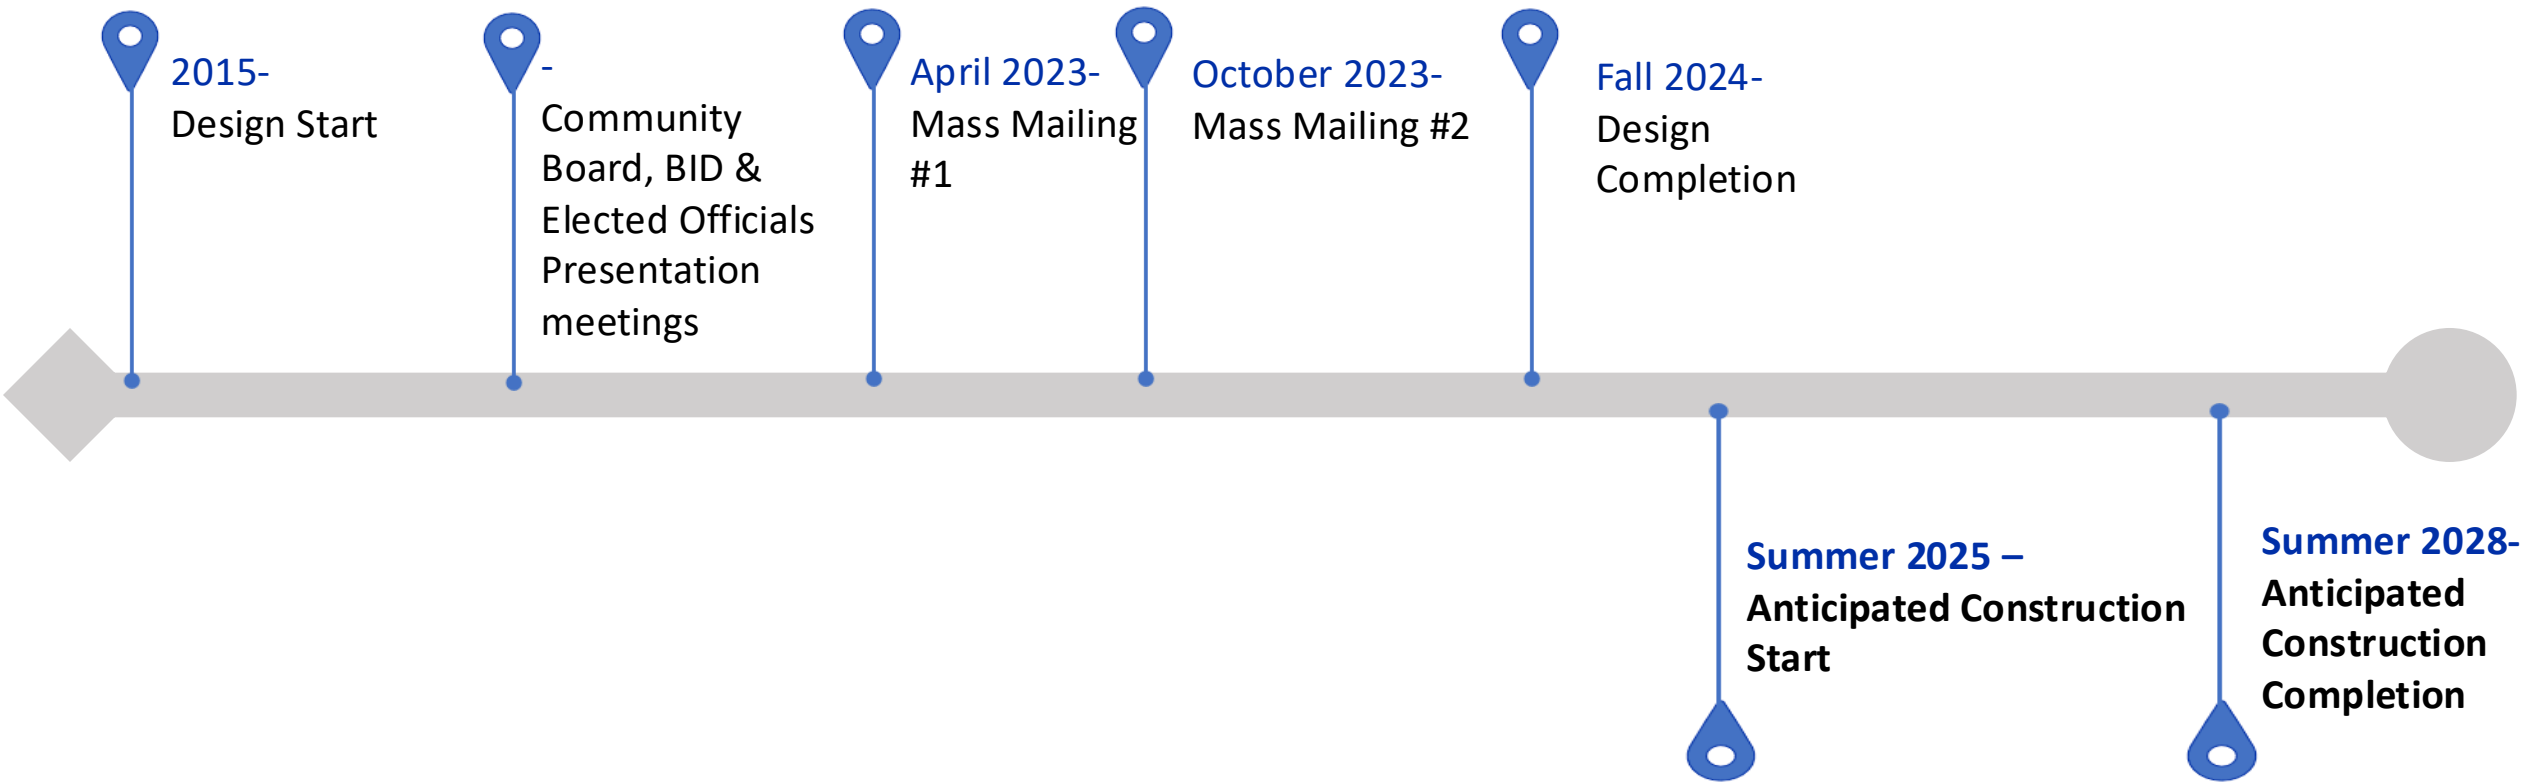



# PROJECT #2 OVERVIEW: INSTALL DISTRIBUTION WM

- #QED1063AC- Install Distribution WM throughout Queens and Bronx- CB12x
- Legal Phase
- Construction FY26
- \$28 Million

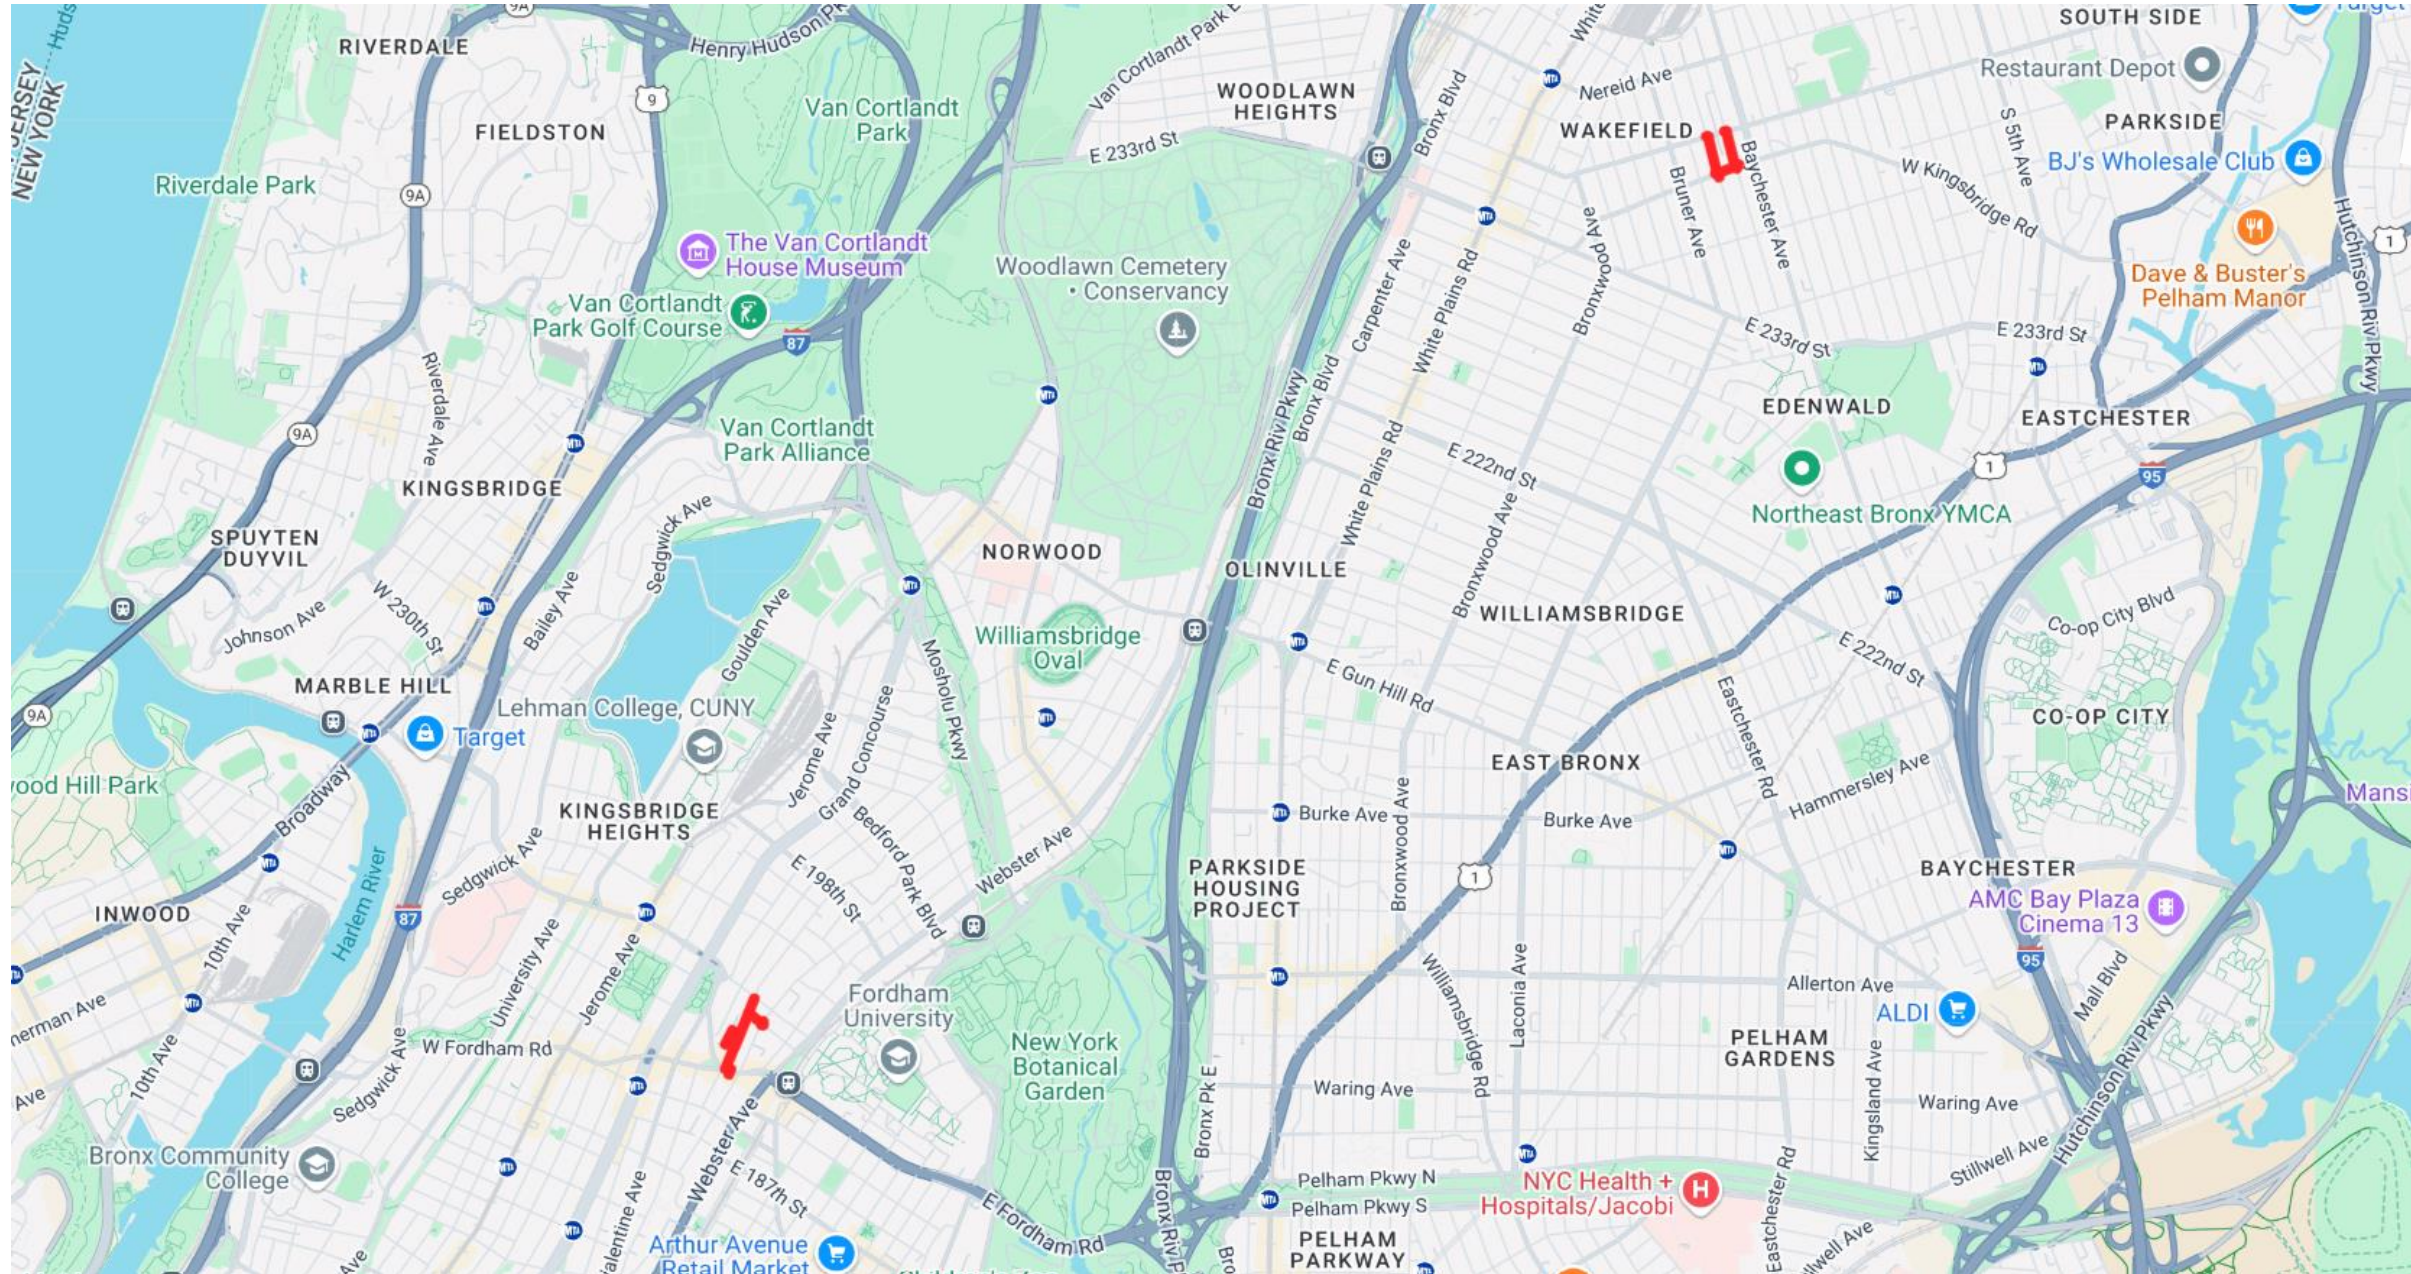



# PROJECT #2 - GOALS: INSTALL DISTRIBUTION WM IN QUEENS AND BRONX

- Replace ageing water pipes throughout the boroughs of Queens and Bronx to improve water distribution and water quality


## PROJECT #2 - SCOPE: -

- **Water Main** – Distribution WM to improve water distribution in two Bronx sites, one in CB12 to improve water distribution and improve water quality and residual pressure in the area



# PROJECT #2 LIMITS: CB12

- Bussing Avenue between Grace Avenue and Edson Avenue
- Grace Avenue between Pitman Avenue and Bussing Avenue
- Edson Avenue between Pitman Avenue and Bussing Avenue

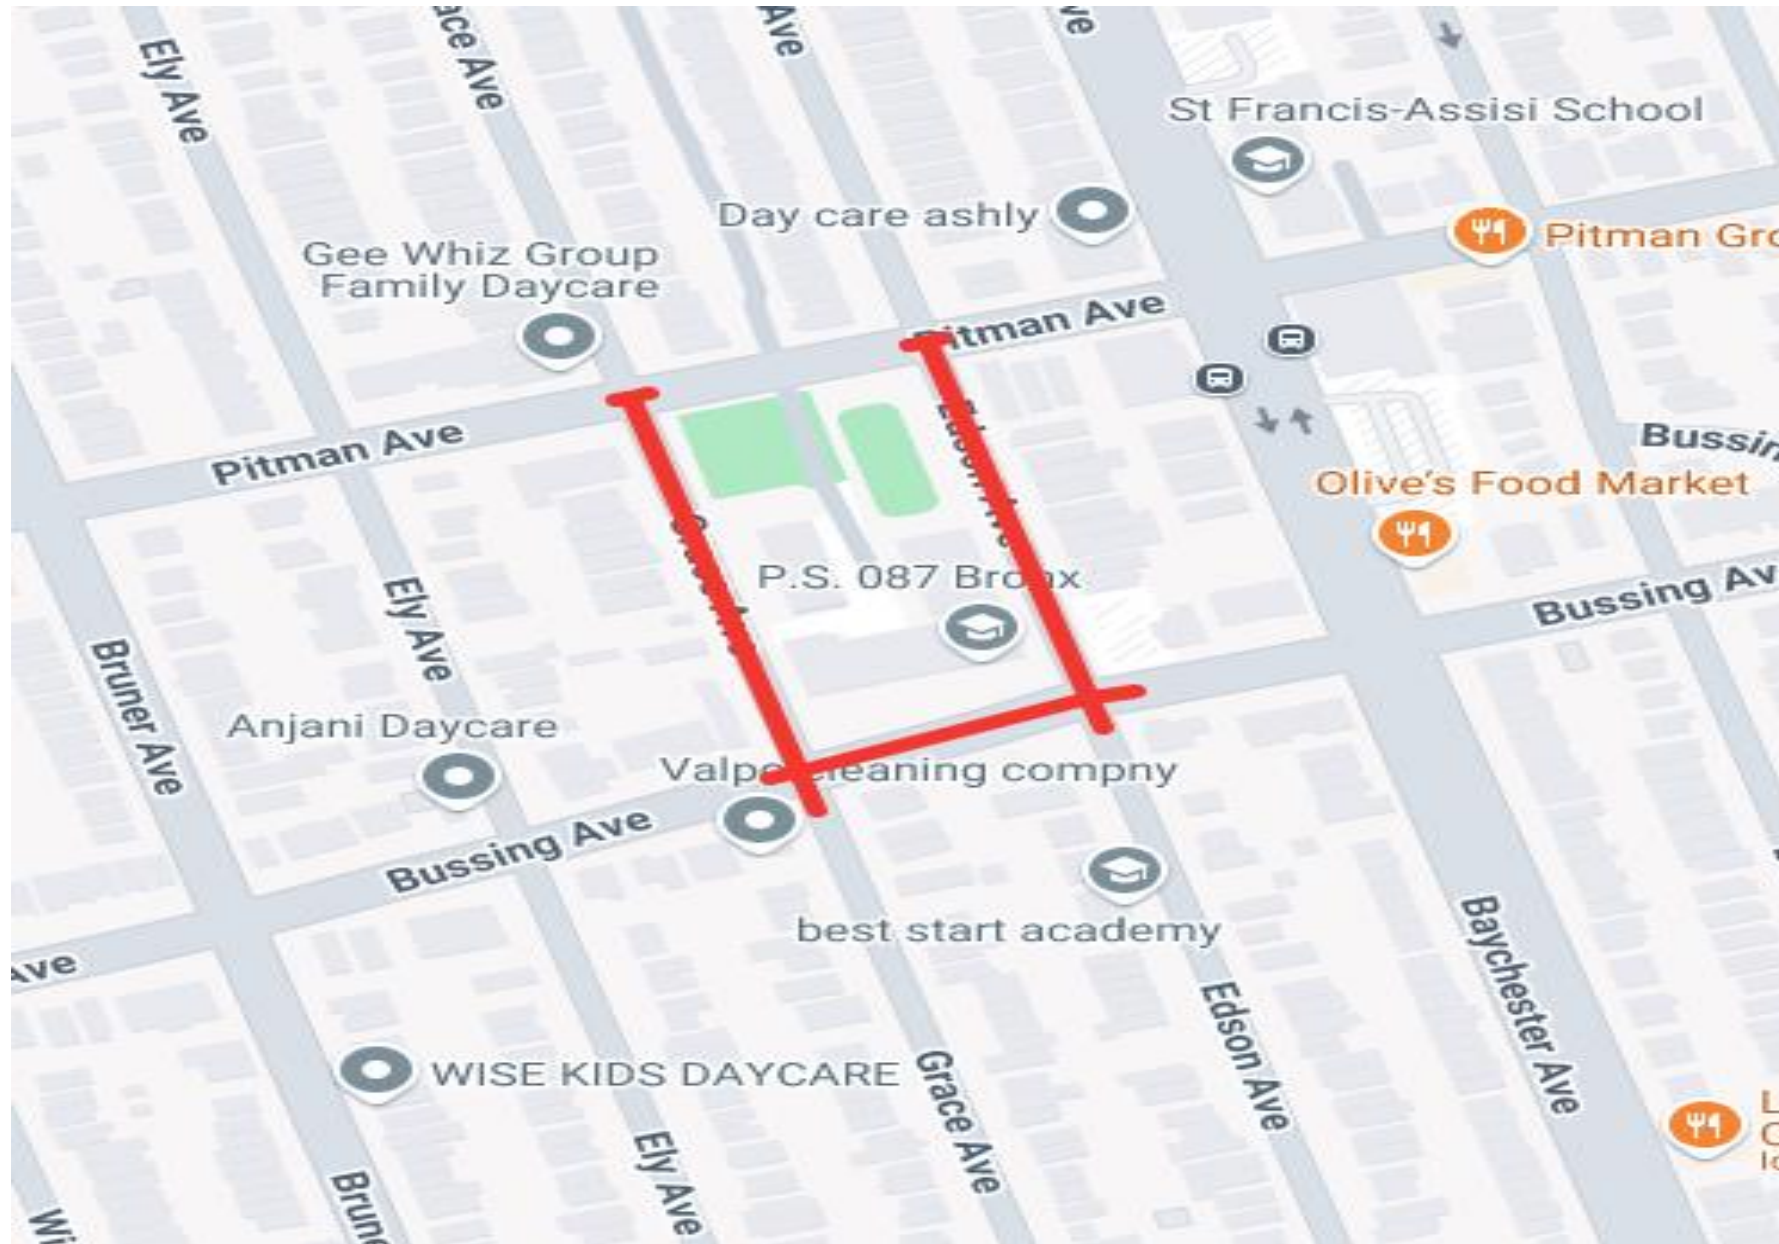


# PROJECT SCHEDULE #2

- Design Completion – Winter 2025

Bid Date-

Construction Start – Fall 2025

- Anticipated Construction Completion – Fall 2027

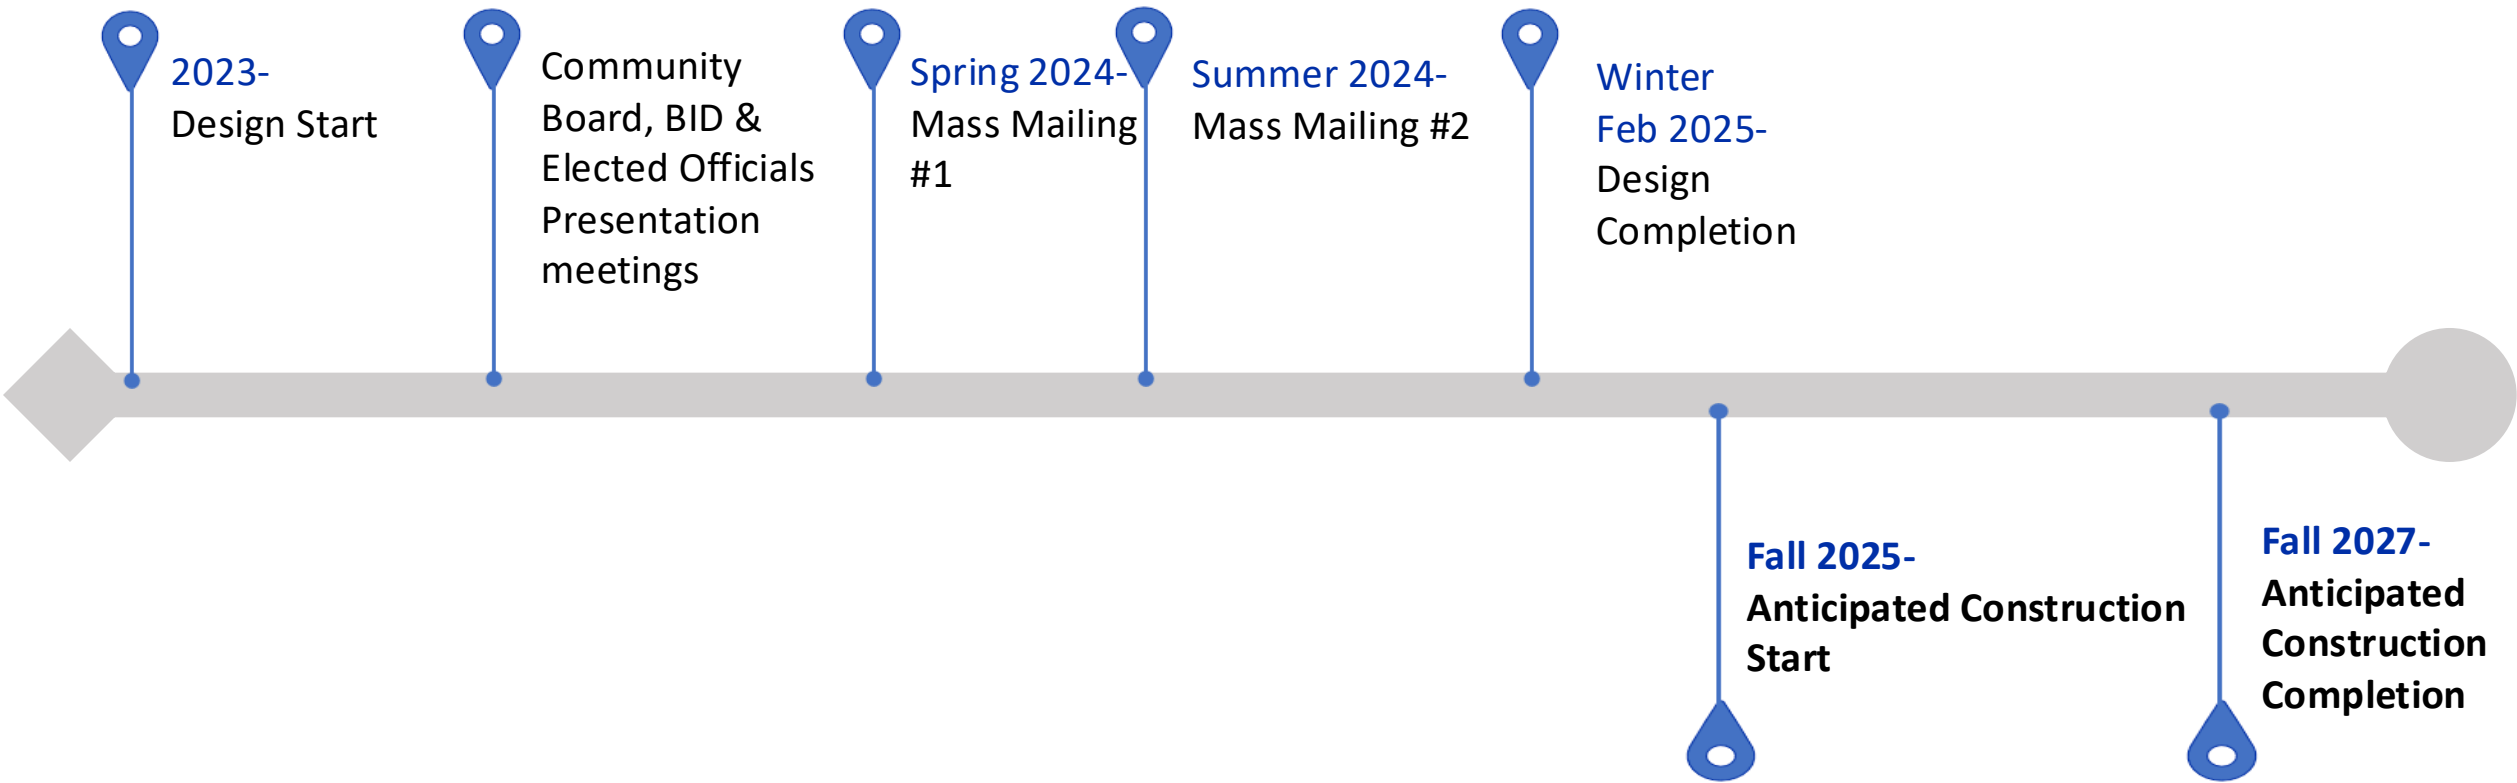

---

# COMMUNITY IMPACTS & MITIGATIONS

- Roadway lane closures, as necessary
- Temporary loss of parking at certain work zones will be necessary
- Temporary relocation of bus stops, when needed, as coordinated with MTA Surface
- Scheduled water main service shut-downs with advanced 72 and 24-hour advisories
- Weekend hours for construction may be necessary; Typical Construction hours are 7AM to 4PM, but can vary depending on work locations, as per DOT OCMC stips.
- Street Vendors/ Dining Out NYC coordination, as required with NYCDOT.



---

# COMMUNITY IMPACTS & MITIGATIONS

## Contractor shall:

- Work within DEP Noise Code Regulations
- Keep storage site areas clean and safe
- Cover trucks delivering fill material
- Provide professional rodent control inspector to monitor/maintain Rodent Control Station within project limits only where there is deep excavation.
- Garbage pick-up may be affected and will be coordinated with appropriate stakeholders and DSNY.

---

# COMMUNITY IMPACTS & MITIGATIONS (cont.)

## TRAFFIC PATTERNS

**Contractors shall maintain the following:**

- Signage and personnel to ensure a safe work site for pedestrians and vehicles
- Maintain pedestrian access to sidewalks, crosswalks and buildings
- Maintain emergency/ through way traffic - one way, in both directions at all times
- Plate and open roadway traffic when site is unattended/ not in use
- Parking and driveway access may be restricted when necessary; coordination is done on a case-by-case basis; signs will be posted in advance of work to avoid towing of vehicles.
- Full roadway closures – intermittent and when necessary

---

# COMMUNITY OUTREACH

- **DDC's Office of Community Outreach + Notification (OCON)** works with CB's, BID's, local businesses, and other community stakeholders impacted by construction.
- DDC will assigned a dedicated on-site Community Construction Liaison (CCL). The CCL information will be provided at the pre-Construction phase:

Email: TBD

Phone: TBD

Field Office Location: TBD

Field Office Hours: 7AM to 3:30PM



**DDC Project Lead: Kristen Cawthorn, [cawthorkr@ddc.nyc.gov](mailto:cawthorkr@ddc.nyc.gov) 929.206.1334**



---

# COMMUNITY OUTREACH (continued)

**Community Construction Liaison (CCL)** responsibilities are as follows:

- First point of contact, maintain on-site presence and communications.
- Identify, resolve, and/or proactively address issues and inquiries.
- Distribute advisories and weekly construction activities newsletter, etc.
- Provide advance 72-hour and 24-hour (confirmation or cancellation) advisories for work impacts by email AND door to door posting.
- Attend community board monthly DSC meetings and other community meetings as necessary, to keep the community informed of the project schedule and impacts.

# COMMUNITY CONSTRUCTION LIAISON INVOLVEMENT

## Keeping You Informed.

The on-site CCL works directly with the project team. CCL will address community concerns, respond to inquiries, attend meetings, as needed, as well as distribute project related materials to keep the community informed and notified.

PROJECT  
INFORMATION  
CARD (PIC)



ADVISORIES



WEEKLY LOOK AHEAD BULLETIN



QUARTERLY  
NEWSLETTERS



---

# THANK YOU

# Q&A