

PEDESTRIAN SAFETY IMPROVEMENTS AT THE INTERSECTION OF 34TH STREET & 8TH AVENUE, MANHATTAN

NYC DDC PROJECT HWPEDSF4

CONTENTS



Project Updates

Utility Work Progress & Delays

Time Extension

Benefits of Infrastructure Upgrades

Outreach & Notification Process


Project Contact

PROJECT UPDATES

- Current Work Hours: Monday – Friday, 8:00 PM – 6:00 AM
- 80% of all City Work Completed.
- Water Main and Drainage Work 100% Completed.
- 80% of all Utility Work Completed.
- Pending Work Includes: Sidewalk, Curb, Bus Pad, Bus Shelter, Resurfacing, Traffic Signal and Street Light Work.

UTILITY WORK PROGRESS

Location 18 - W. 34TH ST AND 8TH AVE, Manhattan
 (Contractor delay #11, #20, #21, #31, #33 & #69)

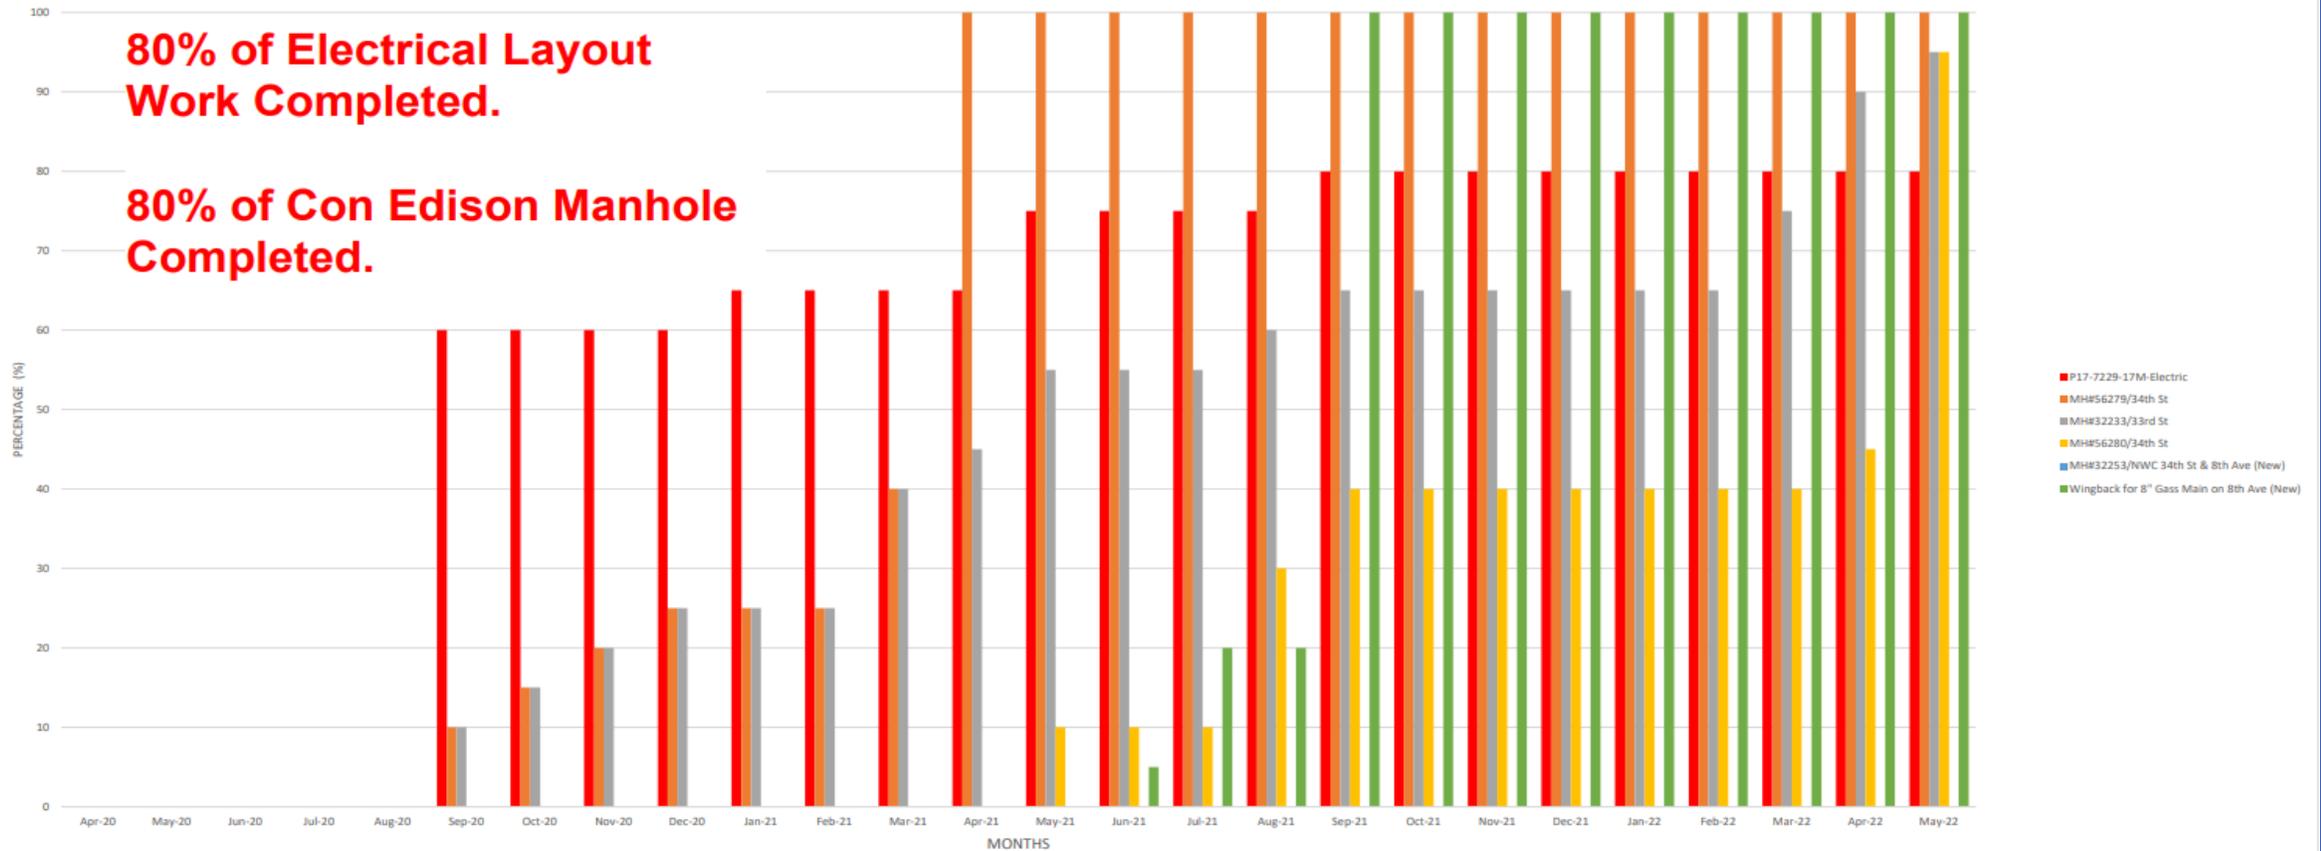

DELAYS

Delays in work are due to aging infrastructure, unexpected weather & field conditions, and the following:

- Completion of four (4) Con Edison manhole structures on W 33rd St & 8th Ave and on W 34th St & 8th Ave.
- Relocation of a shallow 6" gas main found during trench excavation.

TIME EXTENSION

Due to the complex nature of this work & the unforeseen utility delays, a time extension is currently in process for this contract as follows:

- Original Projected End Date: June 2022
- New Projected End Date: June 2023

BENEFITS OF INFRASTRUCTURE UPGRADES


Water Main

Storm Water Drainage

Sidewalk & Roadway


ADA Accessibility Improvements

Utilities

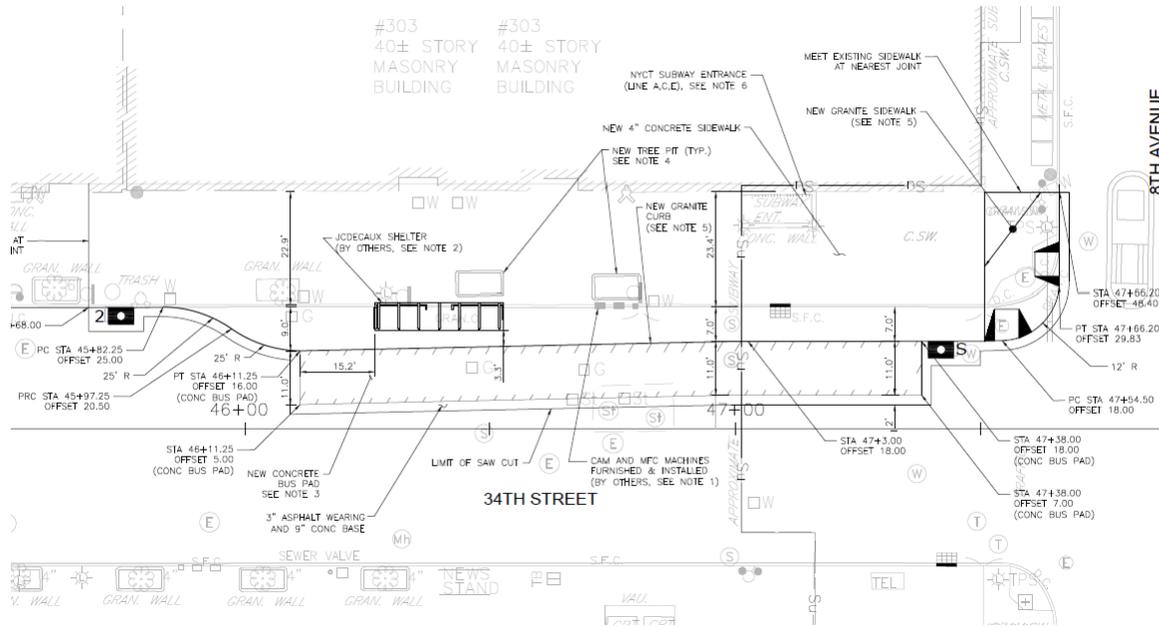

WATER MAIN


Necessary upgrades from a 12" to 20" water main will increase water pressure and increase resilience to prevent water main breaks.

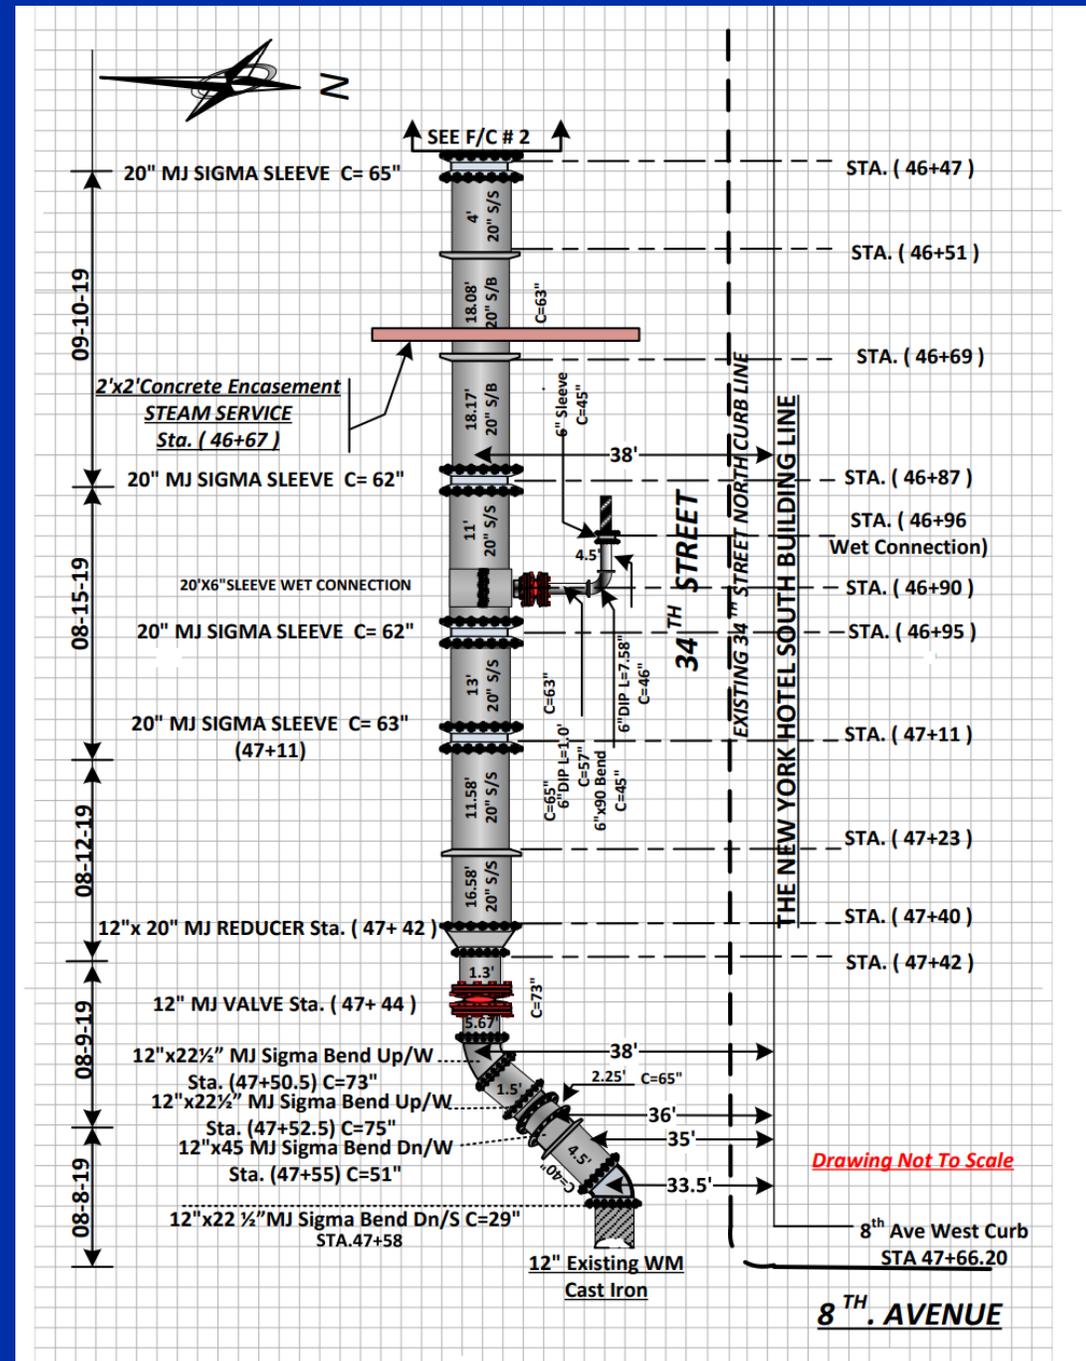

STORM WATER DRAINAGE UPGRADES

Installed new catch basin and replaced existing storm water inlet.

Install new curbs and resurface pavement to improve storm water flow to the catch basins.

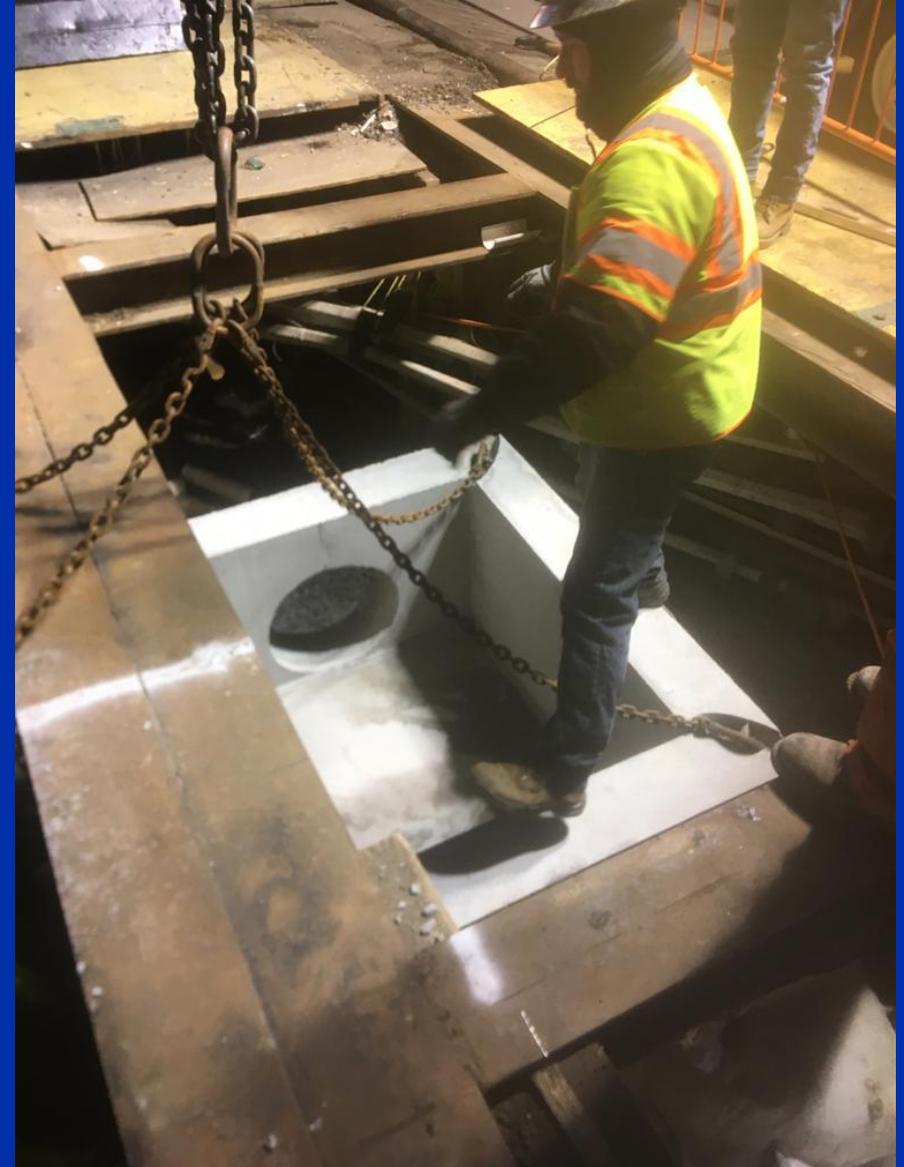


SIDEWALK UPGRADES

Less congestion in the sidewalks; increase sidewalk space by 35% at North-west corner

Reduced crossing distance between north-west and south-west corner

2 New tree pits and Bus shelter at the North-West Corner

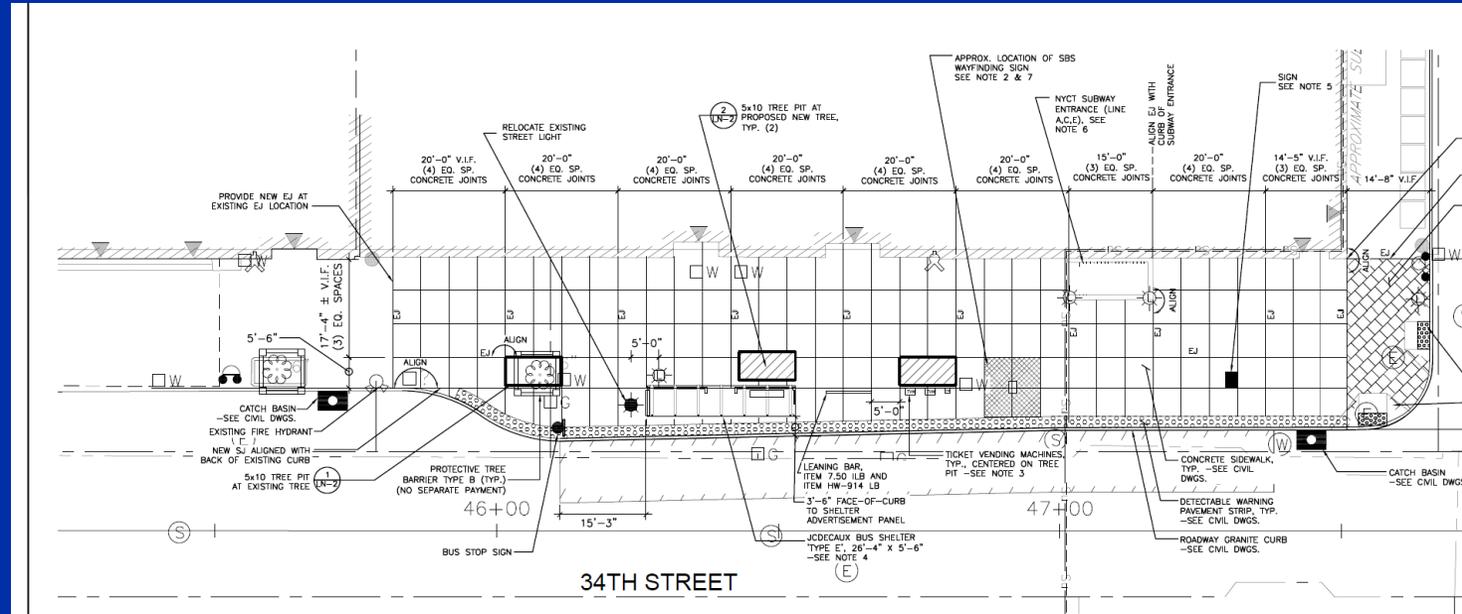

ROADWAY UPGRADES

Resurface entire intersection to extend service life of pavement and to reduce potholes and uneven pavement.

New bus pad at the North-west corner



ADA-COMPLIANT PEDESTRIAN ACCESS ROUTES

Install new ADA-compliant pedestrian ramps at all 4 corners.

2 ramps will be installed at each corner to improve pedestrian traffic.



UTILITY UPGRADES

Upgraded electrical capacity

New Con Edison electric manholes



OUTREACH & NOTIFICATION PROCESS

- A Weekly Look-Ahead Bulletin is provided to the affected community members every Friday for the following week's anticipated work schedule.
- In case of major community impacts (i.e., water service interruptions, curbside parking restrictions, temporary lane closure, etc.), a 72-hour advisory will be provided, followed by a 24-hour prior confirmation or cancellation notice.
- Pedestrian and emergency vehicle access will be maintained at all times.



PROJECT CONTACT

For further information about this project, please contact:

Myriam Benjamin

Community Construction Liaison (CCL)

- **Email:** PedRampSF4CCL@gmail.com
- **Mobile:** (609) 455-4073
- **Office:** (212) 967-1283
- **DDC Website:** www.nyc.gov/ddc
- **DDC Video:** <https://on.nyc.gov/2YliWbd>



THANK YOU