



Eric Adams Mayor Ydanis Rodriguez Commissioner

COMMUNITY BOARD FEEDBACK PACKAGE

Please review this application and provide the required feedback.

DINING OUT NYC

COMMUNITY BOARD RECOMMENDATION FORM

This form is to be used by community boards during the cafe review process. Any comments from the community board should be recorded on this form and submitted to NYC DOT. For information pertaining to specific cafe design requirements, visit the Dining Out NYC website for program legislation, rules, and Setup Guides.

Business Name:			
Cafe Address:			
Application Number:			
CB Review Deadline (on date or next business day):			
NYCDOT Internal Use Only			
Sidewalk Cafe Setup Feedback:	Community Board chooses to WAIVE review		
Comments related to the cafe's physical footprint and dimensions :			
Comments related to pedestrian flow (i.e., visbility, safety , potential crow	wding):		
Commente related to notontial conflicts with evicting own use (i.e., plan	tara hika raaka hua atana);		
Comments related to potential conflicts with existing curb use (i.e., planters, bike racks, bus stops):			
Please check one of the recommendations below, either approval , denial , or approval with modifications <u>relating to</u> the above application:			
	mmunity Board recommends denial		
Community Board recommends approval			
Community Board recommends approval w/ modifications			
Recommended modifications (only if approved w/ modifications):			
Applicant acknowledges and agrees to modifications relating to the above referenced application			

Applicant acknowledges **BUT** does **NOT** agree with modifications relating to the above referenced application. If this box is checked, please provide NYC DOT with documentation of such agreement for NYC DOT's consideration.

RESTAURANT DETAILS

Food Service Establishment Permit(FSEP)

FSEP#: 50155025 Expiration Date: 07/31/2026 DOHMH Status: CURRENT Business Legal Name: HUMAN SCONE MAGIC 2021 LLC Assumed Name: MARY O'S IRISH SODA BREAD SHOP Business Address: 93 1/2 EAST 7 STREET, NEW YORK, NY 10009 Venue Type: Café Last updated from DOHMH: 05/05/2025

Restaurant Information

Entity Type: Limited Liability Corporation (LLC) Phone: (212) 505-5611 Email Address: humansconemagic2021@gmail.com

DOS Information

DOS ID#: 7165168 Process Name: ZENBUSINESS INC. DOS Address: 41 STATE STREET SUITE 112, ALBANY, New York 12207

NYS Liquor Authority Information

Establishment serves alcohol : No

Business hours

Sun: 7:00 AM- 12:00 AM Mon: 7:00 AM- 12:00 AM Tues: 7:00 AM- 12:00 AM Wed: 7:00 AM- 12:00 AM Thurs: 7:00 AM- 12:00 AM Fri: 7:00 AM- 12:00 AM Sat: 7:00 AM- 12:00 AM

SECTION 1: Site Plan

- This Site Plan form is required to be uploaded in the "Sidewalk Site Plan" field of your online application.
- Refer to the <u>How to Apply</u> page in the Dining Out NYC website for more information about the application process.


Identify Clear Path Requirements:

- Clear path requirement for your sidewalk cafe can be found by identifying your corridor type on the DOT's Pedestrian Mobility Plan Pedestrian Demand Map.
- C1- Global Corridor (12 feet Clear Path)
- C2- Regional Corridor (10 feet Clear Path)
- C3- Neighborhood Corridor, Community Connector, or Baseline Street (8 feet Clear Path)

Setup Area Identification :

- Please check this box if you plan to have outdoor dining located partially within private property. If you are uncertain, please request records from your property owner/manager.
- Please check this box if all or part of your sidewalk cafe is in a sidewalk widening area, developed pursuant to the NYC Zoning Resolution. If so, indicate the property line in the site plan drawing below.

Use the space below to draw or upload your Site Plan representing your cafe perimeters, furniture, and clearances.

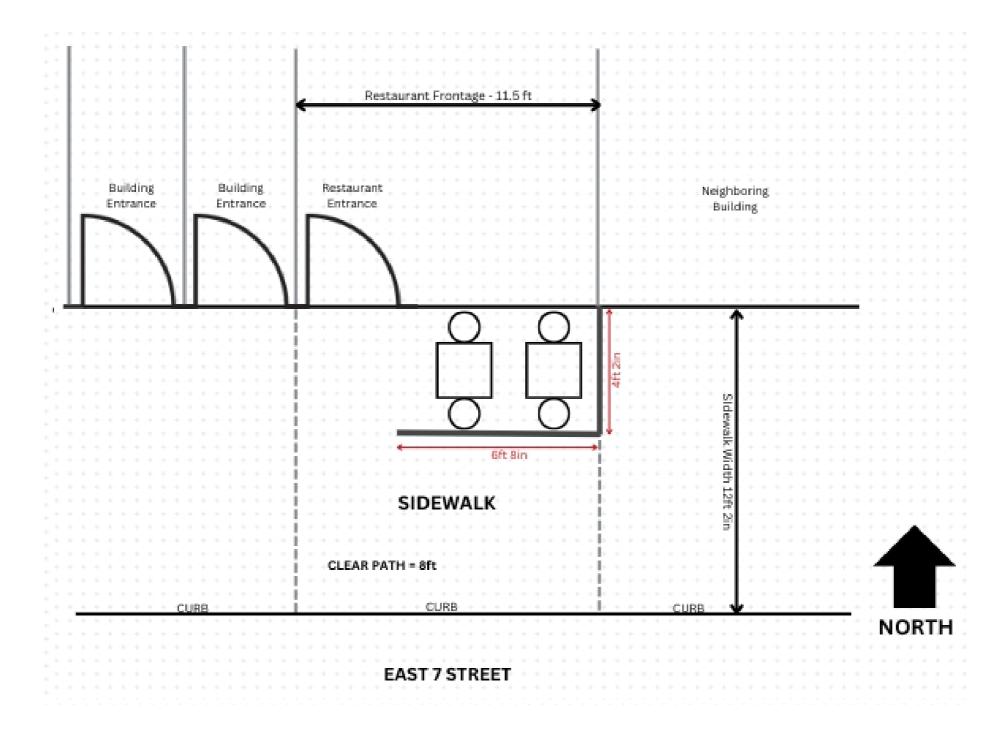



Site Plan Form

Applicant Name:

Restaurant Name: _____

FSEP Number:

Drawing Requirements

Food service establishment frontage shown by:

- Line representing the establishment's space facing the sidewalk
- Length
- Labels

Private Property shown as:

Dashed line

Street names:

Labels on each street

Sidewalk shown as:

- Line representing street curb
- Width measured from building line to curb line

Building entrances shown as:

Label

Cafe perimeter shown as:

- Lines indicating perimeter
- Length and width

Set-up furniture (tables, chairs, etc.) shown as:

 Lines or symbols at approximate location within setup

Elements (in Section 2 of this form) within 15 feet of cafe perimeter, shown as:

- Lines or symbols
- Distance from cafe perimeter
- Labels

Utility coverings (water/gas valves, and pull boxes) shown as:

Symbols representing the location within the setup

North arrow

SECTION 2: Required Clearances

- Please provide distances from the following objects.
- Only provide a distance if the listed object is within 15 feet of your proposed setup.
- Refer to the <u>Setup Guides</u> in the Dining Out NYC website for more information regarding clearances.

Elements with minimum 15 feet of	clearance from si	dewalk cafe:		
S01- Subway Stair: Open End	feet			
Elements with minimum 10 feet clearance from sidewalk cafe:				
S02- Subway Elevator Entrance	feet	S04- MTA Curb Cut	feet	
S03- Exhaust Duct	feet	S05- FDNY Curb Cut	feet	
Elements with minimum 8 feet clearance from sidewalk cafe:				
S06- Street Tree Bed	feet	S13- Newsstand	feet	
S07- Mailbox	feet	S14- Streetlight	feet	
S08- LinkNYC Kiosk	feet	S15- Bus Stop Pole	feet	
S09- Wayfinding Kiosk	feet	S16- Fire Hydrant	feet	
S10- E-charging Station	feet	S17- Bus Stop Shelter	feet	
S11- Parking Meter	feet	S18- Traffic Signal	feet	
S12- SBS Fare Machine	feet			
Elements with minimum 5 feet cl	earance from sid	ewalk cafe:		
S19- CitiBike/Bike Share Station	feet	S24- Emergency Exit Hatch	feet	
S20- Bike Corral	feet	S25- Subway Stair: Closed End	feet	
S21- Micromobility Station	feet	S26- Subway Elevator: Non-Entry	feet	
S22- Primary Building Entrance	feet	S27- Siamese Connection	feet	
S23- Curb Cut	feet			
Elements with minimum 3 feet clearance from sidewalk cafe:				
S28- Elevated Train Infrastructure	feet	S29- Transformer Vault	feet	
Elements with minimum 1 foot 6 inches clearance from sidewalk cafe elements:				
S30- Vent Infrastructure: utility vent poles, vent grates, subway grates	inches	S31- Manholes	inches	
Check this box if none of the objects listed above are within 15 feet of the proposed setup.				
Cannot block access to building		Cannot block or be attached to fire escape stairs		

SECTION 3: Material Requirements

Materials Checklist:

- Please indicate which of the following materials will be part of your sidewalk cafe by checking the box next to the category. If applicable, please confirm the materials comply with the Dining Out NYC requirements by checking the box next to the associated requirement.
- Refer to the <u>Setup Guides</u> in the Dining Out NYC website for more information regarding materials.

*Required
Perimeter Demarcation (All of the following must be
 Perimeter demarcation must be clear and visible by usir base wall, railing, planter, fence, or stanchion and rope. Maximum height is 2 feet 6 inches (excluding planting) Not affixed to the sidewalk.
*Optional- Only check the material categories y
Furnishings (if using, the first two below must be me
Lightweight and easily movable.
Not affixed to the sidewalk.
Check here if you plan to place tables/chairs on top of a or Basement Door Certification
Awnings Physically Attached to the Building (if using
Minimum 8 feet height from the ground and does not e
Easily removable, comprised of fire-grade and wind resi
Does not extend beyond the perimeter of the sidewalk
Complies with the New York City Building Code. Please and/or approval from the Landmarks Preservation Com
Overhead Coverings/ Umbrellas (if using, all of the fo
Minimum 7 feet height from the ground and does not e
Easily removable, comprised of fire-grade and wind resi
Does not extend beyond the perimeter of the sidewalk
The umbrella/overhead covering has a weighted base a
Any support structures are of sufficient size and strengt
Lighting and Electrical Connections (if using, all of the second
Any lighting is outdoor rated, properly secured, and lighting is outdoor rated, properly secured, properly secured, and lighting is outdoor rated, properly secured, pro
Connection is directly connected to ground floor restaut the cafe.
Does not extend beyond the perimeter of the sidewalk
Does not exceed 10 feet in height.
Not attached to any City property, including street trees
Electrical work complies with the applicable requirement Electrical Code. Please note that this may require addition Landmarks Preservation Commission (LPC) as applicable

*

met)

ng a lightweight and removable self-supporting

s)).

you intend to use in your sidewalk cafe*

et)

cellar or basement door. If so, please complete the Cellar

<u>g, all of the following must be met)</u>

exceed 10 feet height.

istant materials.

cafe.

note that this may require additional permits from DOB, mission (LPC) as applicable.

<u>ollowing must be met)</u>

exceed 10 feet height.

istant materials.

cafe.

and any supports are not affixed to the sidewalk.

th, made of durable materials, and free of defects.

<u>he following must be met)</u>

htweight.

arant's power source and within the perimeter of

cafe.

nts set forth in DOT's rules and the New York City onal permits from DOB or FDNY, and/or approval from the le.









