





# SAFE ROUTES TO SCHOOLS IN THE BRONX

PROJECT ID: HWCSCHPBX

**Bronx Community Board 6 Committee** 

### **AGENDA**

#### About the Project

- Data
- Why the Project is Necessary
- Community Benefits
- Map
- Locations

**Construction Overview** 

Impacts and Mitigation

Outreach and Notification

Q & A



### **Project Data**



Project ID: HWCSCHPBX

Notice to Proceed (NTP) August 2022

Start: February 2023

Anticipated Completion: Summer 2024

Contractor: Triumph Construction Corp

Contract Value: \$8,667.816.45

Typical Work Hours: 7AM to 4PM, Monday through Friday

8AM to 5PM, Saturday (as needed with community notification)

Holiday; Summer; Special Event Embargos: Yes

### **Existing Conditions**



E.187<sup>th</sup> Street at 3<sup>rd</sup> / Washington Avenues



E.185<sup>th</sup> Street at 3<sup>rd</sup> / Bathgate Avenues

### Benefits of Safe Routes to School (Upgrades)

- Bump out at selected Pedestrian Crossings
- Reconstruction of Sidewalk and Pedestrian Ramps
- Replacement of Water Valves & Water Mains
- Installation Sewer Main & Drainage Basins
- Upgraded Street Lighting & Traffic Signals

### **Purpose of the Project**

NYC DDC is upgrading underground infrastructures and installing safety improvements and traffic calming installation measures along school corridors.

### School That Will Benefit From This Work



- I.S. 254x
- X457 Fordham High School for the Arts
- Our Lady of Mount Carmel School

#### Locations

- E. 185<sup>th</sup> Street at 3<sup>rd</sup> Avenue
- E. 187<sup>th</sup> Street at 3<sup>rd</sup> / Washington Avenues





### **Construction Overview**



PRELIMINARY WORK	IN THE GROUND (DEP WORK)	ABOVE GROUND (DOT WORK)
Utilities	Saw cutting and trench setup	Sidewalks and Curbs
Outreach	Water Valves; Water Mains	Sidewalk curb bump-outs
Permits and scheduling	Fire hydrant relocations	ADA Pedestrian ramps
Staging and storage of materials	Sewers	Upgrade Traffic Lights
Street tree guards and pruning	Catch basin	/signals/signage Street markings
Test pits and street markings		
Street furniture removal		



### **Current Construction Activities**

# Completed and Current Work Areas – Watermain and Sewers



# Underground Work Completed 6/16/2023

 E. 187<sup>th</sup> Street 3<sup>rd</sup> / Washington Avenues

#### **Underground Work**

 E.185<sup>th</sup> Street at 3<sup>rd</sup> / Washington Avenues

### **Current Work**

NYC

**Catch Basin Installation** 



E.187<sup>th</sup> Street at 3<sup>rd</sup> Avenue

**Excavation for Installation of Water Main** 



E.187<sup>th</sup> Street at 3<sup>rd</sup> Avenue



# Schedule for Remaining Work

#### Water Main & Valve Installation (2023)

Intersection of E.185<sup>th</sup> Street at 3<sup>rd</sup> Avenue

#### Catch Basins (2023)

Intersection of E.185<sup>th</sup> Street at 3<sup>rd</sup> Avenue

#### Curbs, Pedestrian Walk & Ramps (2024)

- Intersection of E.185<sup>th</sup> Street at 3<sup>rd</sup> Avenue
- Intersection of E.187<sup>th</sup> Street at 3<sup>rd</sup> Avenue

#### Street Lighting & Traffic Lights (2024)

- Intersection of E.185<sup>th</sup> Street at 3<sup>rd</sup> Avenue
- Intersection of E.187<sup>th</sup> Street at 3<sup>rd</sup> Avenue





# **Community Impacts**

### **Community Impacts**



- Pedestrian/sidewalk access maintained
- Temporary street closures and/or limited access
- Resident engineer monitors operations and works within DEP Noise Code regulations
- Sidewalk / loading dock access from curb may be temporarily restricted while work is conducted (coordination arranged on case by case basis)
- Parking temporarily restricted
- Trash pick up impacts will be coordinate through field office
- Rodent survey performed prior to construction
- Rodent control installed by professional rodent control contractor



# **Community Outreach**

### **Community Outreach**



- Role of Construction Community Liaison (CCL)
- o CCL for this project:

Michael Whitfield 718-542-7918 hwcschpbxccl1@gmail.com

### **Special Needs**

- Individuals with special needs should contact CCL
- DDC field staff works to accommodate needs

# **Quarterly Newsletter**



www.nyc.gov/ddc

DDC Video www.nyc.gov/webuild

Mayor Lorraine Grillo




# Weekly Look Ahead





# **Advisory Notice**

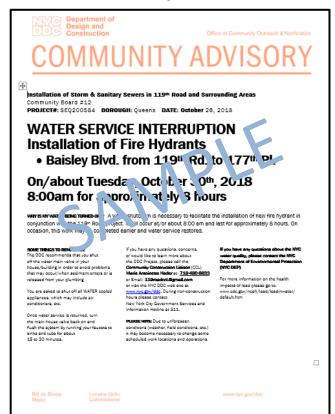


Outreach Materials (nyc.gov)



# **DDC Outreach Page**

- Community Presentations
- Outreach Materials
- Videos
- Acquisition Events

Outreach Materials (nyc.gov)

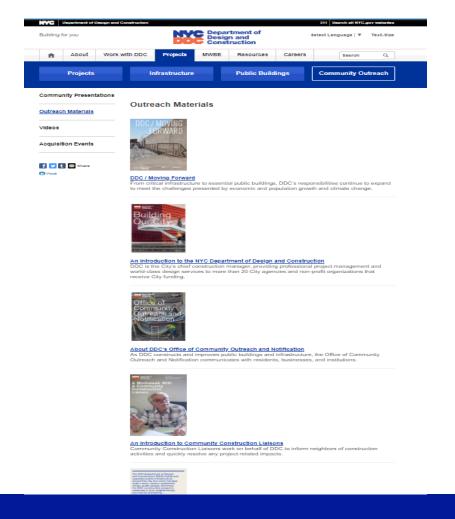









# Q&A

# Thank you!