



COMMUNITY BOARD FEEDBACK PACKAGE

Please review this application and provide the required feedback.

DINING OUT NYC

Business Name:

WHISKEY TAVERN

Application Number: 20240320010004

Cafe Setup Address: 79 BAXTER STREET, NEW YORK, NY, 10013

COMMUNITY BOARD RECOMMENDATION FORM

This form is to be used by community boards during the cafe setup review process. Any comments from the community board should be recorded on this form and submitted to NYC DOT. For information pertaining to specific cafe setup design requirements, visit the Dining Out NYC website for program legislation, rules, and Setup Guides.

Recommendation Response Deadline: 5/22/2024
NYCDOT Internal Use Only
Roadway Cafe Setup Comments:
Comments related to the cafe setup's physical footprint and dimensions :
Comments related to pedestrian flow (i.e., visbility, safety , potential crowding):
Comments related to potential conflicts with existing curb use (i.e., planters, bike racks, bus stops):
Overall recommendation for the cafe setup:
Suggested modifications:

RESTAURANT DETAILS

Food Service Establishment Permit(FSEP)

FSEP#: 41352188

Expiration Date: **07/31/2024** DOHMH Status: **CURRENT**

Business Legal Name: 79 RESTAURANT CORP.

Assumed Name: WHISKEY TAVERN

Business Address: 79 BAXTER STREET, NEW YORK, NY 10013

Restaurant Information

Entity Type: Corporation

Employer Identification Number: 26-2806757

Phone: (212) 374-9119

Email Address: reservations@whiskeyworldwide.com

Emergency Contact Information

First Name: **Rob**Last Name: **Magill**Phone: **(917)** 923-6206

Email Address: rob@whiskeyworldwide.com

DOS Information

DOS ID#: 3676731

Process Name: Frank Palillo

DOS Address: 60 Broad St., New York, New York 10004

NYS Liquor Authority Information

NYSLA Serial No: **1210735** License Type: **On-Premises**


Name of License: 79 Restaurant Corp

Title of Representative: **Entity**

Name of Certificate Holder: 79 Restaurant Corp


Business hours


Sun: 12:00 PM- 4:00 AM Mon: 12:00 PM- 4:00 AM Tues: 12:00 PM- 4:00 AM Wed: 12:00 PM- 4:00 AM Thurs: 12:00 PM- 4:00 AM Fri: 12:00 PM- 4:00 AM Sat: 12:00 PM- 4:00 AM

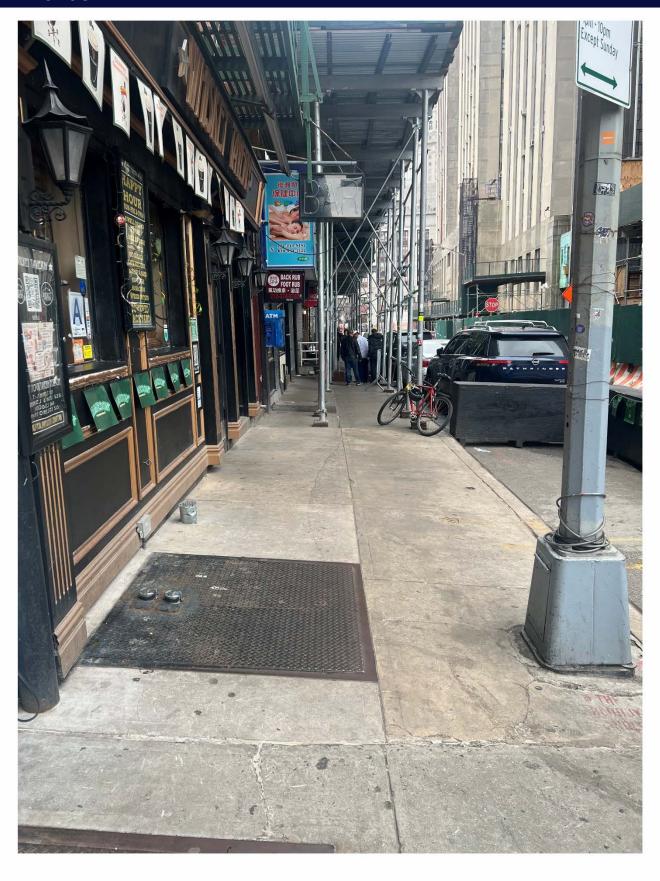





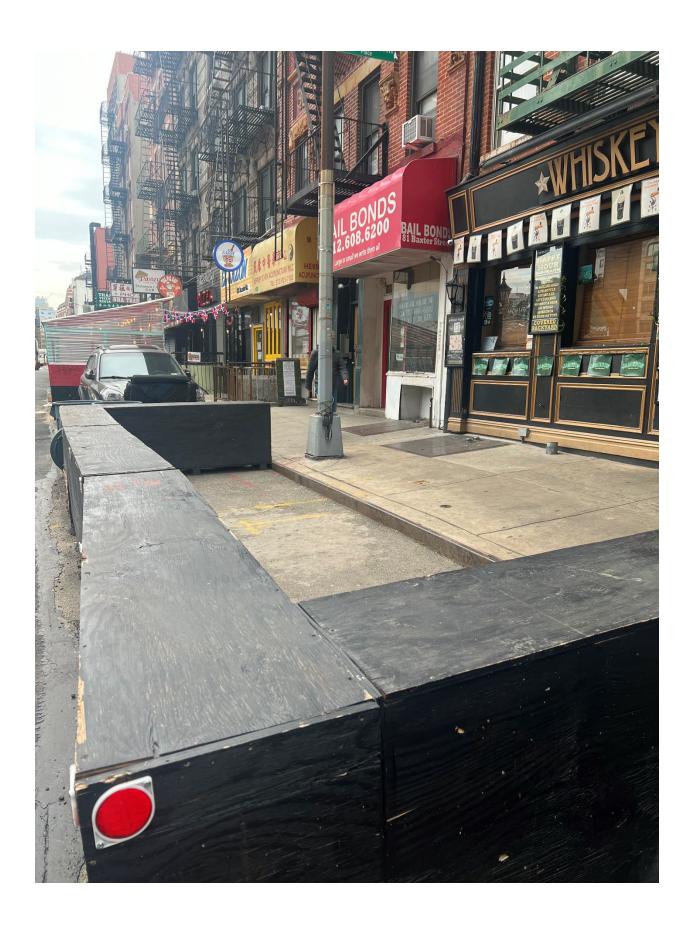

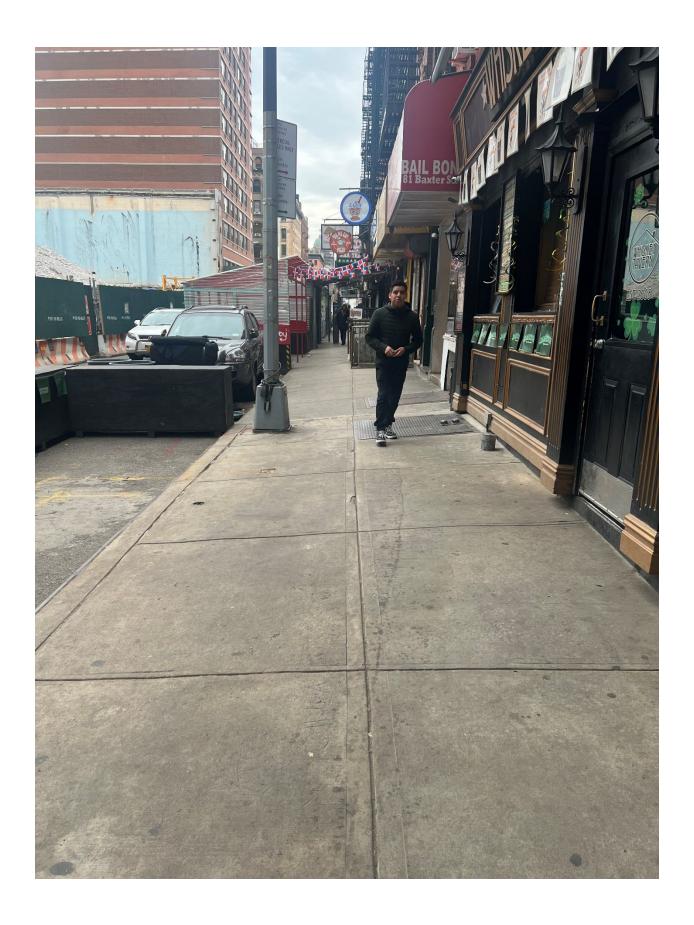



 This Site Plan form is required to be uploaded in the "Roadway Site Plan" field of your online application Refer to the How to Apply page in the Dining Out NYC website for more information about the application process.

Identify Permitted Parking Location:


- Identify the Parking Sign in front of or around the area where your roadway setup would be located.
- Roadway cafes can only be placed in:
- 1. Parking spaces, which include: metered and non-metered spaces, commercial parking, alternate side parking, angled parking,
- 2. Loading areas, including loading only, truck loading, hotel loading, and no parking zones.
- 3. Floating Parking Lane- a parking lane that is separated from the curb by a protected bicycle lane that is adjacent to the curb.

P1- Parking Space

P2- Loading Area

P3- Floating Parking Lane

Roadway Cafe Site Plan Form George Ruotolo Applicant Name: 79 Restaurant Co

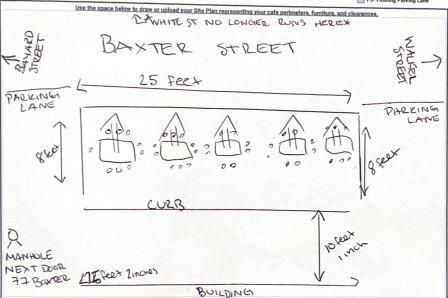

41352188 **Drawing Requirements**

Food service establishment frontage shown by:

- Line representing space occupied in building
- Labels Length

Restaurant Name:

FSEP Number:

- Street names:
- Labels on each street
- Sidewalk shown as:
- Line representing street curb
- Width measured from building line to curb line

Roadway shown as:

- Lines indicating parking lane
- Width of parking lane

Cafe perimeter shown as:

- Lines indicating perimeter Length and width of all three sides
- Set-up furniture (tables, chairs, etc.)

shown as:

Lines or symbols at approximate location within setup

Elements or objects shown as:

- Lines or symbols
- Labels
- Distance from cafe perimeter

Utility coverings shown as:

- Symbols representing the approximate shape of the covering within the setup
 - Q MANHOLE COVER

☑ UTILITY COVERING

*BUILDING LENGTH IS 25 FT ZIN *WHITE ST NO LONGER RUNS PERIEN DICULAL TO BHATEL ST DUE TO CONSTRUCTION ON JAIL

Width of roadway cafe: 8

Length of roadway cafe: 25.16 feet



SECTION 2: Required Clearance	es	
 Leave box blank if not applicable 	ed object is wi	ojects. Ithin 15 feet of your proposed setup. C website for more information regarding clearances.
Elements with minimum 15 feet cle	earance from r	oadway cafe:
R01- Subway Stair: Open End	feet	
R02- Fire Hydrant	feet	
Elements with minimum 10 feet cle	earance from r	oadway cafe:
R03- Subway Elevator Entrance	feet	
R04- FDNY Curb Cut	feet	
R05- MTA Curb Cut	feet	
Elements with minimum 5 feet clea	arance from ro	adway cafe:
R06- Curb Cut	feet	R11- CitiBike/Bike Share Stationfeet
R07- Emergency Exit Hatch	feet	R12- Bike Corralfeet
R08- Subway Stair: Closed End	feet	R13- Micromobility Stationfeet
R09- Subway Elevator: Non-Entry _	feet	R14- Drainage Infrastructurefeet
R10- Bus Stop Pole: Non- Approaching Side	feet	
Elements with minimum 3 feet clea	arance from ro	adway cafe:
R15- Elevated Train Infrastructure	feet	
R16- Transformer Vault	feet	
Elements with minimum 1 foor and	l 6 inches clea	rance from roadway cafe:
R17- Vent Infrastructure	feet	
Elements with minimum 6 inches c	learance from	roadway cafe:
R18- Thermoplastic Marking	feet	
Roadway cafe distance from cross	walks:	
R19- Adjacent to non-approaching side of crosswalk (min. 8 foot distance)	feet	Distance required from crosswalk on non-approaching side
R20- Adjacent to approaching (stopping) side of crosswalk (min. 20 foot distance)	feet	
R21- No crosswalk present (maintain 20 feet from curb line of intersecting street)	feet	800

SECTION 3: Material Requirements

Please indicate which of the following materials will be part of your roadway cafe by checking the box next to the category. If applicable, please confirm the materials comply with the Dining Out NYC requirements. Refer to the Setup Guides in the Dining Out NYC website for more information regarding materials.

Required

/lateria	ls Chec	klist:
----------	---------	--------

Barriers	
Maintained on all sides of the cafe except the side fronting the ground floor restaurant.	
Not permanently affixed to the roadway.	
30-42 inches tall (excluding planting), and at least 4 inches in width.	
Barriers are interconnected with each other.	
Any cladding over the barriers is securely fastened or affixed.	
■ Minimum 4 inches wide reflective strip on each barrier on the outward facing side.	
■ Water-filled with a minimum of 150 pounds per linear foot of barrier length.	
If your proposed barriers will utilize fill materials other than water please check this box. This may re	equire
additional information from the applicant and further review by the Dining Out NYC team, as well as	
supporting DOT units and City agencies.	
Optional- Only check the material categories you intend to use in your roadway cafe	
Flooring	
Durable, lightweight, easily removable, mold-resistant, elevated from the ground level to allow for	
drainage, and removable to allow for cleaning.	
Flush with the curb line (except if located on a slope, be flush to the greatest extent feasible), and	
compliant with applicable accessibility requirements.	
Maintains a 6 inch covered channel between curb and base of flooring to allow for drainage.	
<u>Furnishings</u>	
■ Lightweight and easily movable.	
Vertical Screenings	
Located between the barrier and 6 feet above the cafe base or floor.	
Located on the roadway facing side, does not extend the beyond the perimeter of the roadway cafe,	and
is not affixed to the outward facing side of barriers.	
Easily removable, comprised of non-opaque, fire-grade, and wind resistant materials.	
If within 50 feet of any regulatory or warning signs, does not exceed 46 inches in height.	
Overhead Coverings/ Umbrellas	
■ Minimum of 7 feet and maximum of 10 feet from the base or floor of the roadway cafe.	
Has a weighted base and any support structures are not affixed to the outward facing side of barrier	rs, are
of sufficient size and strength, made of durable materials, and free of defects.	
Easily removable, comprised of fire-grade and wind resistant materials.	
If within 50 feet of any regulatory or warning signs, does not exceed 46 inches in height.	
Lighting and Electrical Connections	
Any lighting is outdoor rated, properly secured, and lightweight.	
At least 14 feet above sidewalk, and 18 feet above roadway.	
Not attached to any City property, including street trees.	
Electrical work complies with the applicable requirements set forth in the DOT's rules and the New Y	ork
City Electrical Code.	
Please check this box if you are submitting additional documents for review. Documents may include techn	nical
drawings prepared by a licensed professional.	