



Eric Adams Mayor Ydanis Rodriguez Commissioner

COMMUNITY BOARD FEEDBACK PACKAGE

Please review this application and provide the required feedback.

DINING OUT NYC

COMMUNITY BOARD RECOMMENDATION FORM

This form is to be used by community boards during the cafe review process. Any comments from the community board should be recorded on this form and submitted to NYC DOT. For information pertaining to specific cafe design requirements, visit the Dining Out NYC website for program legislation, rules, and Setup Guides.

Business Name:		
Cafe Location:		
Application Number:		
CB Feedback Deadline (on date or next business day):		
NYCDOT Internal Use Only		

Roadway Cafe Setup Comments:

Comments related to the cafe's physical footprint and dimensions:

Comments related to **pedestrian flow** (i.e., visbility, safety , potential crowding):

Comments related to potential conflicts with existing curb use (i.e., planters, bike racks, bus stops):

Overall recommendation for the cafe setup:

Suggested modifications related to the above referenced application:

RESTAURANT DETAILS

Food Service Establishment Permit(FSEP) FSEP#: 50099007 Expiration Date: 09/30/2025 DOHMH Status: CURRENT Business Legal Name: RUBY'S EAST VILLAGE LLC Assumed Name: RUBY'S CAFE Business Address: 55 3 AVENUE, NEW YORK, NY 10003 Venue Type: Restaurant (no bar) Last updated from DOHMH: 03/10/2025

Restaurant Information

Entity Type: Limited Liability Corporation (LLC) Phone: (646) 998-4265 Email Address: finance@wishyouwereheregroup.com

DOS Information

DOS ID#: 5550981 Process Name: Ruby's East Village DOS Address: 198 11th St, New York, New York 10003

NYS Liquor Authority Information

NYSLA Serial No: 783268 License Type: On-Premises Name of License: Tim Sykes Title of Representative: Managing Partners Name of Certificate Holder: Rubys East Village LLC

Business hours

Sun: 9:00 AM- 11:00 PM Mon: 9:00 AM- 11:00 PM Tues: 9:00 AM- 11:00 PM Wed: 9:00 AM- 11:00 PM Thurs: 9:00 AM- 11:00 PM Fri: 9:00 AM- 11:00 PM Sat: 9:00 AM- 11:00 PM

SECTION 1: Site Plan


- This Site Plan form is required to be uploaded in the "Roadway Site Plan" field of your online application.
- Refer to the <u>How to Apply</u> page in the Dining Out NYC website for more information about the application process.

Identify Permitted Parking Location:

- Identify the Parking Sign in front of or around the area where your roadway setup would be located.
- Roadway cafes can only be placed in:
 - 1. Parking spaces, which include: metered and non-metered spaces, commercial parking, alternate side parking, angled parking, and seasonally restricted parking.
- 2. Loading areas, including loading only, truck loading, hotel loading, and no parking zones.
- 3. Floating Parking Lane- a parking lane that is separated from the curb by a protected bicycle lane that is adjacent to the curb.



- P2- Loading Area
- P3- Floating Parking Lane

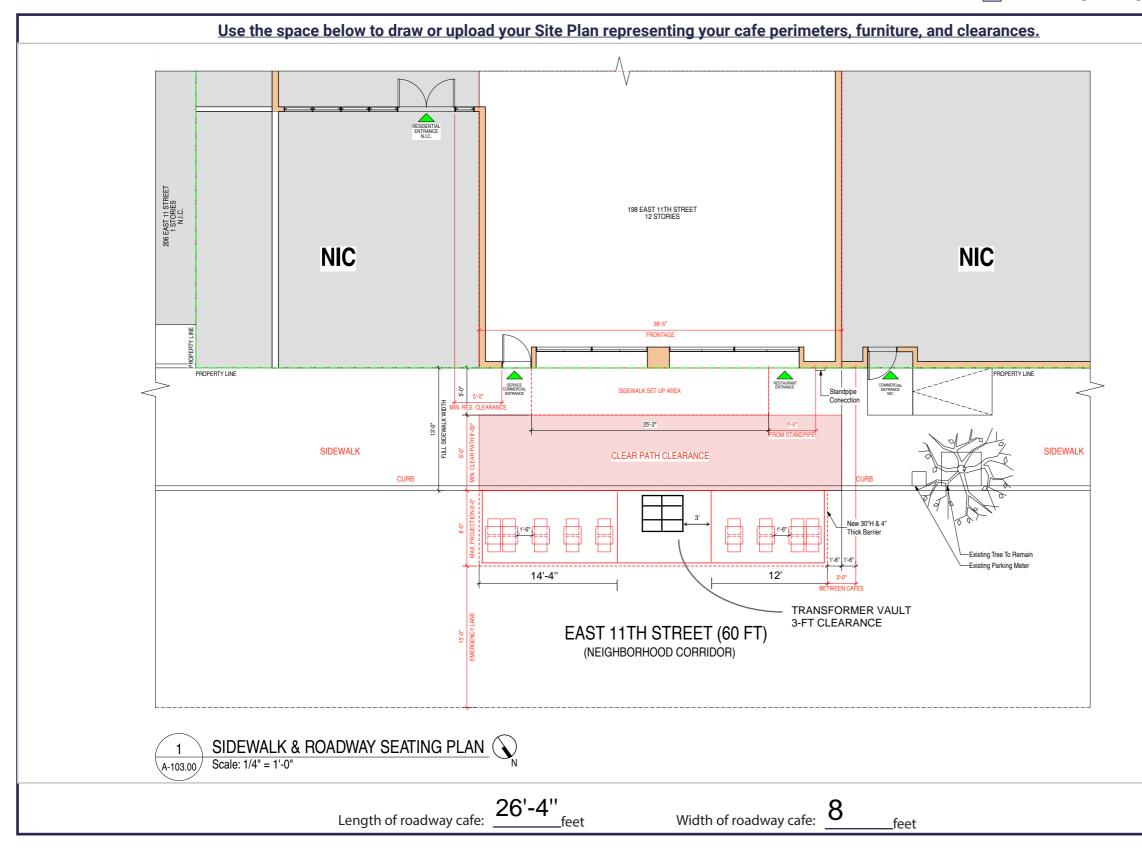





Roadway Cafe Site Plan Form

Applicant Name:

Restaurant Name:

FSEP Number:

Ruby's East Village LLC

Mireya Herrera

50140018

Drawing Requirements

Food service establishment frontage shown as:

- Line representing the establishment's space facing the sidewalk
- Length
- Label

Street names:

Labels on each street

Sidewalk shown as:

Line representing street curb

Roadway shown as:

• Width of curbside lane

Cafe perimeter shown as:

- Lines indicating perimeter
- Length and width

Set-up furniture (tables, chairs, etc.) shown as:

• Lines or symbols at approximate location within setup

Elements (in Section 2 of this form) within 15 feet of cafe perimeter, shown as:

- Lines or symbols
- Distance from cafe perimeter
- Labels

Utility coverings (water/gas valves, and pull boxes) shown as:

Symbols representing the location within the setup

North arrow

SECTION 2: Required Clearances

- Please provide distances from the following objects.
- Only provide a distance if the listed object is within 15 feet of your proposed setup.
- Refer to the <u>Setup Guides</u> in the Dining Out NYC website for more information regarding clearances.

Elements with minimum 15 feet cl	earance from re	badway cafe:		
R01- Subway Stair: Open End	feet	R02- Fire Hydrant	feet	
Elements with minimum 10 feet clearance from roadway cafe:				
R03- Subway Elevator Entrance	feet	R05- MTA Curb Cut	feet	
R04- FDNY Curb Cut	feet			
Elements with minimum 5 feet clearance from roadway cafe:				
R06- Curb Cut	feet	R11- CitiBike/Bike Share Station	feet	
R07- Emergency Exit Hatch	feet	R12- Bike Corral	feet	
R08- Subway Stair: Closed End	feet	R13- Micromobility Station	feet	
R09- Subway Elevator: Non-Entry	feet	R14- Drainage Infrastructure	feet	
R10- Bus Stop Pole: Non- Approaching Side	feet			
Elements with minimum 3 feet cle	arance from roa	adway cafe:		
R15- Elevated Train Infrastructure	feet	R16- Transformer Vault	3 _{feet}	
Elements with minimum 1 foor and 6 inches clearance from roadway cafe:				
R17- Vent Infrastructure: utility vent poles, vent grates, subway grates	feet	R18- Manholes	inches	
Elements with minimum 6 inches clearance from roadway cafe:				
R19- Thermoplastic Marking	feet			
Roadway cafe distance from crosswalks:				
 R20- Adjacent to non-approaching side of crosswalk (min. 8 foot distance) R21- Adjacent to approaching (stopping) side of crosswalk (min. 20 foot distance) R22- No crosswalk present (maintain 20 feet from curb line of intersecting street) 	feet feet	crosswalk on fr	istance required om crosswalk on pproaching side	

SECTION 3: Material Requirements

- Please indicate which of the following materials will be part of your roadway cafe by checking the box next to the category. If applicable, please confirm the materials comply with the Dining Out NYC requirements.
- Refer to the <u>Setup Guides</u> in the Dining Out NYC website for more information regarding materials.

Materials Checklist:

<u>*Required</u>
Barriers (All of the following must be met)
Maintained on all sides of the cafe except the side front
Not permanently affixed to the roadway.
30-42 inches tall (excluding planting), and at least 4 inc
Barriers are interconnected with each other.
Any cladding over the barriers is securely fastened or a
Minimum 4 inches wide reflective strip on each barrier
Water-filled with a minimum of 150 pounds per linear f
*Optional - Only check the material categories ye
Flooring (if using, all of the following must be met)
Durable, lightweight, easily removable, mold-resistant, drainage, and removable to allow for cleaning.
Flush with the curb line (except if located on a slope, be
compliant with applicable accessibility requirements.
Maintains a 6 inch covered channel between curb and
Furnishings (if using, all of the following must be me
Lightweight and easily movable.
Vertical Screenings (if using, all of the following muse
Located between the barrier and 6 feet above the cafe
Located on the roadway facing side, does not extend the is not affixed to the outward facing side of barriers.
Easily removable, comprised of non-opaque, fire-grade
If within 50 feet of any regulatory or warning signs, do
Overhead Coverings/ Umbrellas (if using, all of the fo
Minimum of 7 feet and maximum of 10 feet from the based of the set of the based of the set of th
Has a weighted base and any support structures are no
of sufficient size and strength, made of durable materia
Easily removable, comprised of fire-grade and wind res
If within 50 feet of any regulatory or warning signs, do
Lighting and Electrical Connections (if using, all of th
Any lighting is outdoor rated, properly secured, and lig
At least 14 feet above sidewalk, and 18 feet above road
Not attached to any City property, including street tree
Electrical work complies with the applicable requireme Electrical Code. Please note that this may require additi Landmarks Preservation Commission (LPC) as applicab

Check this box if none of the objects listed above are within 15 feet of the proposed setup.

<u>*</u>

ting the ground floor restaurant.

hes in width.

ffixed. on the outward facing side.

oot of barrier length.

you intend to use in your roadway cafe*

elevated from the ground level to allow for

e flush to the greatest extent feasible), and

base of flooring to allow for drainage.

t)

<u>st be met)</u>

base or floor. he beyond the perimeter of the roadway cafe, and

, and wind resistant materials. es not exceed 46 inches in height.

<u>ollowing must be met)</u>

ase or floor of the roadway cafe. ot affixed to the outward facing side of barriers, are ials, and free of defects. sistant materials. pes not exceed 46 inches in height.

<u>ne following must be met)</u>

ghtweight.

lway.

es.

ents set forth in DOT's rules and the New York City ional permits from DOB or FDNY, and/or approval from the ole.