



Eric Adams Mayor Ydanis Rodriguez Commissioner

COMMUNITY BOARD FEEDBACK PACKAGE

Please review this application and provide the required feedback.

DINING OUT NYC

COMMUNITY BOARD RECOMMENDATION FORM

This form is to be used by community boards during the cafe review process. Any comments from the community board should be recorded on this form and submitted to NYC DOT. For information pertaining to specific cafe design requirements, visit the Dining Out NYC website for program legislation, rules, and Setup Guides.

Business Name:				
Cafe Location:				
Application Number:				
CB Feedback Deadline (on date or next business day):				
NYCDOT Internal Use Only				

Roadway Cafe Setup Comments:

Comments related to the cafe's physical footprint and dimensions:

Comments related to **pedestrian flow** (i.e., visbility, safety , potential crowding):

Comments related to potential conflicts with existing curb use (i.e., planters, bike racks, bus stops):

Overall recommendation for the cafe setup:

Suggested modifications related to the above referenced application:

RESTAURANT DETAILS

Food Service Establishment Permit(FSEP) FSEP#: 50086120 Expiration Date: 11/30/2025 DOHMH Status: CURRENT Business Legal Name: FIRST HOSPITALITY LLC Assumed Name: MISTER PARADISE Business Address: 105 1 AVENUE, NEW YORK, NY 10003 Venue Type: Restaurant (with bar) Last updated from DOHMH: 03/10/2025

Restaurant Information Entity Type: Limited Liability Corporation (LLC) Phone: (619) 623-5576

Email Address: darwin@paradiseprojects.nyc

DOS Information

DOS ID#: 5155679 Process Name: Mister Paradise DOS Address: 105 1st Avenue, New York, New York 10009

NYS Liquor Authority Information

NYSLA Serial No: 1305241 License Type: On-Premises Name of License: William Wyatt Title of Representative: Principal Name of Certificate Holder: William Wyatt

Business hours

Sun: 2:00 AM- 12:00 AM Mon: 5:00 AM- 1:00 AM Tues: 5:00 AM- 1:00 AM Wed: 5:00 PM- 1:00 AM Thurs: 5:00 PM- 2:00 AM Fri: 5:00 PM- 3:00 AM Sat: 2:00 PM- 3:00 AM

SECTION 1: Site Plan


- This Site Plan form is required to be uploaded in the "Roadway Site Plan" field of your online application.
- Refer to the <u>How to Apply</u> page in the Dining Out NYC website for more information about the application process.

Identify Permitted Parking Location:

- Identify the Parking Sign in front of or around the area where your roadway setup would be located.
- Roadway cafes can only be placed in:
 - 1. Parking spaces, which include: metered and non-metered spaces, commercial parking, alternate side parking, angled parking, and seasonally restricted parking.
 - 2. Loading areas, including loading only, truck loading, hotel loading, and no parking zones.
- 3. Floating Parking Lane- a parking lane that is separated from the curb by a protected bicycle lane that is adjacent to the curb.



- P2- Loading Area
- P3- Floating Parking Lane

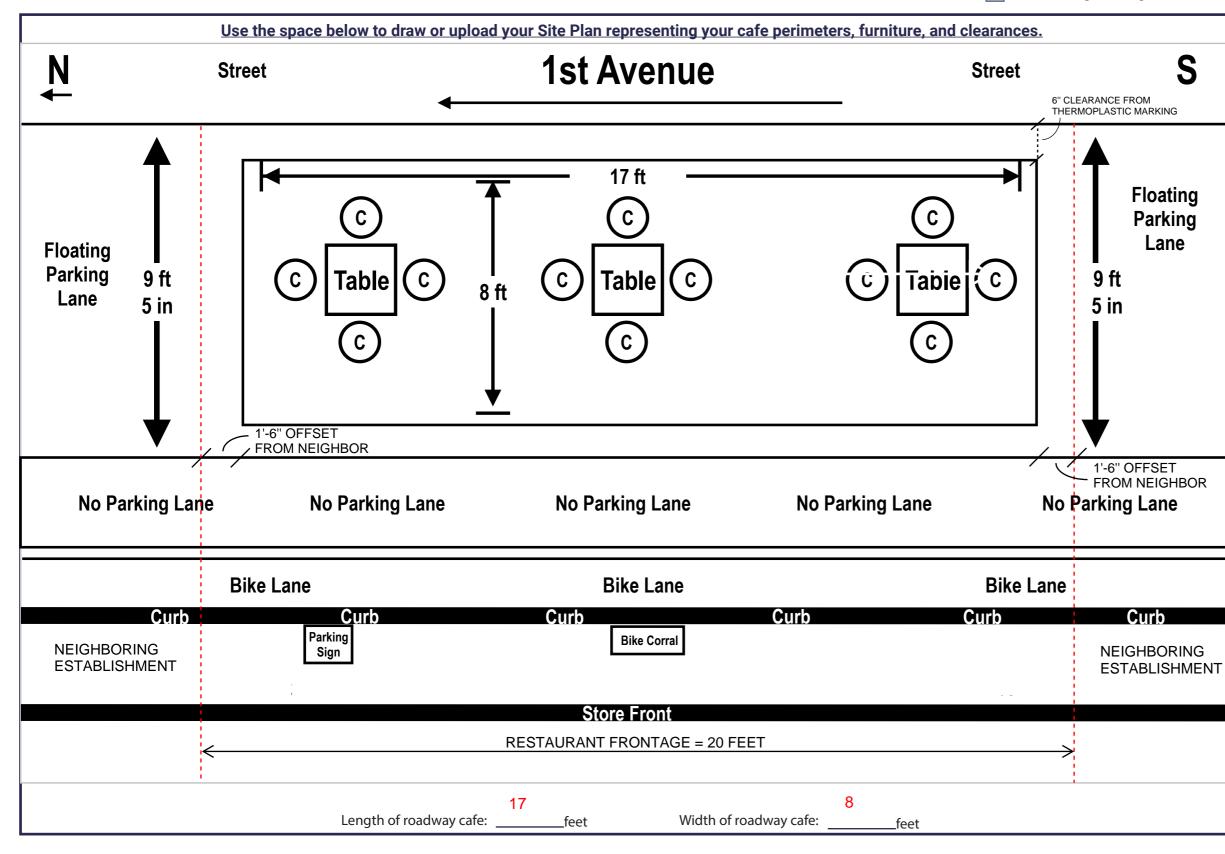







Applicant Name:

Mister Paradise

Restaurant Name:

FSEP Number:

50086120

Drawing Requirements

Food service establishment frontage shown as: Line representing the establishment's space facing the sidewalk Length Label Street names: Labels on each street Sidewalk shown as: Line representing street curb Roadway shown as: Width of curbside lane Cafe perimeter shown as: Lines indicating perimeter

Length and width

Set-up furniture (tables, chairs, etc.) shown as:

• Lines or symbols at approximate location within setup

Elements (in Section 2 of this form) within 15 feet of cafe perimeter, shown as:

- Lines or symbols
- Distance from cafe perimeter
- Labels

Utility coverings (water/gas valves, and pull boxes) shown as:

Symbols representing the location within the setup

North arrow

SECTION 2: Required Clearances

- Please provide distances from the following objects.
- Only provide a distance if the listed object is within 15 feet of your proposed setup.
- Refer to the <u>Setup Guides</u> in the Dining Out NYC website for more information regarding clearances.

Elements with minimum 15 feet cle	earance	from ro	badway cafe:				
R01- Subway Stair: Open End		feet	R02- Fire Hydrant		feet		
Elements with minimum 10 feet cle	earance	from ro	badway cafe:				
R03- Subway Elevator Entrance		feet	R05- MTA Curb Cut		_feet		
R04- FDNY Curb Cut		feet					
Elements with minimum 5 feet clearance from roadway cafe:							
R06- Curb Cut		feet	R11- CitiBike/Bike Share Station		feet		
R07- Emergency Exit Hatch		feet	R12- Bike Corral	15	feet		
R08- Subway Stair: Closed End		feet	R13- Micromobility Station		feet		
R09- Subway Elevator: Non-Entry		feet	R14- Drainage Infrastructure		feet		
R10- Bus Stop Pole: Non- Approaching Side		feet					
Elements with minimum 3 feet clea	arance f	rom roa	adway cafe:				
R15- Elevated Train Infrastructure		feet	R16- Transformer Vault		_feet		
Elements with minimum 1 foor and 6 inches clearance from roadway cafe:							
R17- Vent Infrastructure: utility vent poles, vent grates, subway grates		feet	R18- Manholes		_inches		
Elements with minimum 6 inches clearance from roadway cafe:							
R19- Thermoplastic Marking	0.5	feet					
Roadway cafe distance from crosswalks:							
 R20- Adjacent to non-approaching side of crosswalk (min. 8 foot distance) R21- Adjacent to approaching (stopping) side of crosswalk (min. 20 foot distance) R22- No crosswalk present (maintain 20 feet from curb line of intersecting street) 		_feet _feet	crosswalk on	Distance requi	kon 📔		

SECTION 3: Material Requirements

- Please indicate which of the following materials will be part of your roadway cafe by checking the box next to the category. If applicable, please confirm the materials comply with the Dining Out NYC requirements.
- Refer to the <u>Setup Guides</u> in the Dining Out NYC website for more information regarding materials.

Materials Checklist:

*Required
Barriers (All of the following must be met)
Maintained on all sides of the cafe except the side front
Not permanently affixed to the roadway.
30-42 inches tall (excluding planting), and at least 4 including planting).
Barriers are interconnected with each other.
Any cladding over the barriers is securely fastened or af
Minimum 4 inches wide reflective strip on each barrier
Water-filled with a minimum of 150 pounds per linear for
*Optional - Only check the material categories yo
Flooring (if using, all of the following must be met)
Durable, lightweight, easily removable, mold-resistant, drainage, and removable to allow for cleaning.
Flush with the curb line (except if located on a slope, be
compliant with applicable accessibility requirements.
Maintains a 6 inch covered channel between curb and b
Furnishings (if using, all of the following must be met
Lightweight and easily movable.
Vertical Screenings (if using, all of the following mus
Located between the barrier and 6 feet above the cafe
Located on the roadway facing side, does not extend the is not affixed to the outward facing side of barriers.
Easily removable, comprised of non-opaque, fire-grade If within 50 feet of any regulatory or warning signs, doe
Overhead Coverings/ Umbrellas (if using, all of the fo
Minimum of 7 feet and maximum of 10 feet from the ba
Has a weighted base and any support structures are no
of sufficient size and strength, made of durable materia
Easily removable, comprised of fire-grade and wind res
If within 50 feet of any regulatory or warning signs, doe
Lighting and Electrical Connections (if using, all of th
Any lighting is outdoor rated, properly secured, and lig
At least 14 feet above sidewalk, and 18 feet above road
Not attached to any City property, including street trees
Electrical work complies with the applicable requireme Electrical Code. Please note that this may require additi Landmarks Preservation Commission (LPC) as applicabl

Check this box if none of the objects listed above are within 15 feet of the proposed setup.

ing the ground floor restaurant.

hes in width.

fixed. on the outward facing side.

oot of barrier length.

ou intend to use in your roadway cafe*

elevated from the ground level to allow for

e flush to the greatest extent feasible), and

base of flooring to allow for drainage.

<u>t)</u>

<u>st be met)</u>

base or floor. ne beyond the perimeter of the roadway cafe, and

, and wind resistant materials. es not exceed 46 inches in height.

<u>ollowing must be met)</u>

ase or floor of the roadway cafe. t affixed to the outward facing side of barriers, are als, and free of defects. sistant materials. es not exceed 46 inches in height.

<u>e following must be met)</u>

htweight.

lway.

es.

ents set forth in DOT's rules and the New York City ional permits from DOB or FDNY, and/or approval from the le.