



COMMUNITY BOARD FEEDBACK PACKAGE

Please review this application and provide the required feedback.

DINING OUT NYC

COMMUNITY BOARD RECOMMENDATION FORM

This form is to be used by community boards during the cafe review process. Any comments from the community board should be recorded on this form and submitted to NYC DOT. For information pertaining to specific cafe design requirements, visit the Dining Out NYC website for program legislation, rules, and Setup Guides.

Business Name:
Cafe Location:
Application Number:
CB Feedback Deadline (on date or next business day):
NYCDOT Internal Use Only
Roadway Cafe Setup Comments:
Comments related to the cafe's physical footprint and dimensions:
Comments related to pedestrian flow (i.e., visbility, safety , potential crowding):
Comments related to potential conflicts with existing curb use (i.e., planters, bike racks, bus stops):
Overall recommendation for the cafe setup:
Suggested modifications related to the above referenced application:
ouggested modifications related to the above referenced application.

RESTAURANT DETAILS

Food Service Establishment Permit(FSEP)

FSEP#: 41618267

Expiration Date: 09/30/2024 DOHMH Status: CURRENT

Business Legal Name: HUGHES MURRAY WALSH LLC

Assumed Name: PHOENIX

Business Address: 447 EAST 13 STREET, NEW YORK, NY 10009

Venue Type: Bar/Tavern/Lounge

Last updated from DOHMH: 10/23/2024

Restaurant Information

Entity Type: Limited Liability Corporation (LLC)

Phone: (347) 281-2503

Email Address: gwf1986@live.com

DOS Information

DOS ID#: 4107537

Process Name: C/O United States Corporations Agents INC

DOS Address: 7014 13th Avenue Suite 202, Brooklyn, New York 11228

NYS Liquor Authority Information

NYSLA Serial No: 05242414868

License Type: On-Premises

Name of License: Ford Beverages LLC

Title of Representative: Owner

Name of Certificate Holder: Garrett Ford

Business hours

Sun: 3:00 PM- 4:00 AM

Mon: 3:00 PM- 3:00 AM


Tues: 3:00 PM- 3:00 AM

Wed: 3:00 PM- 3:00 AM

Thurs: 3:00 PM- 3:00 AM

Fri: 3:00 PM- 3:00 AM

Sat: 3:00 PM- 3:00 AM

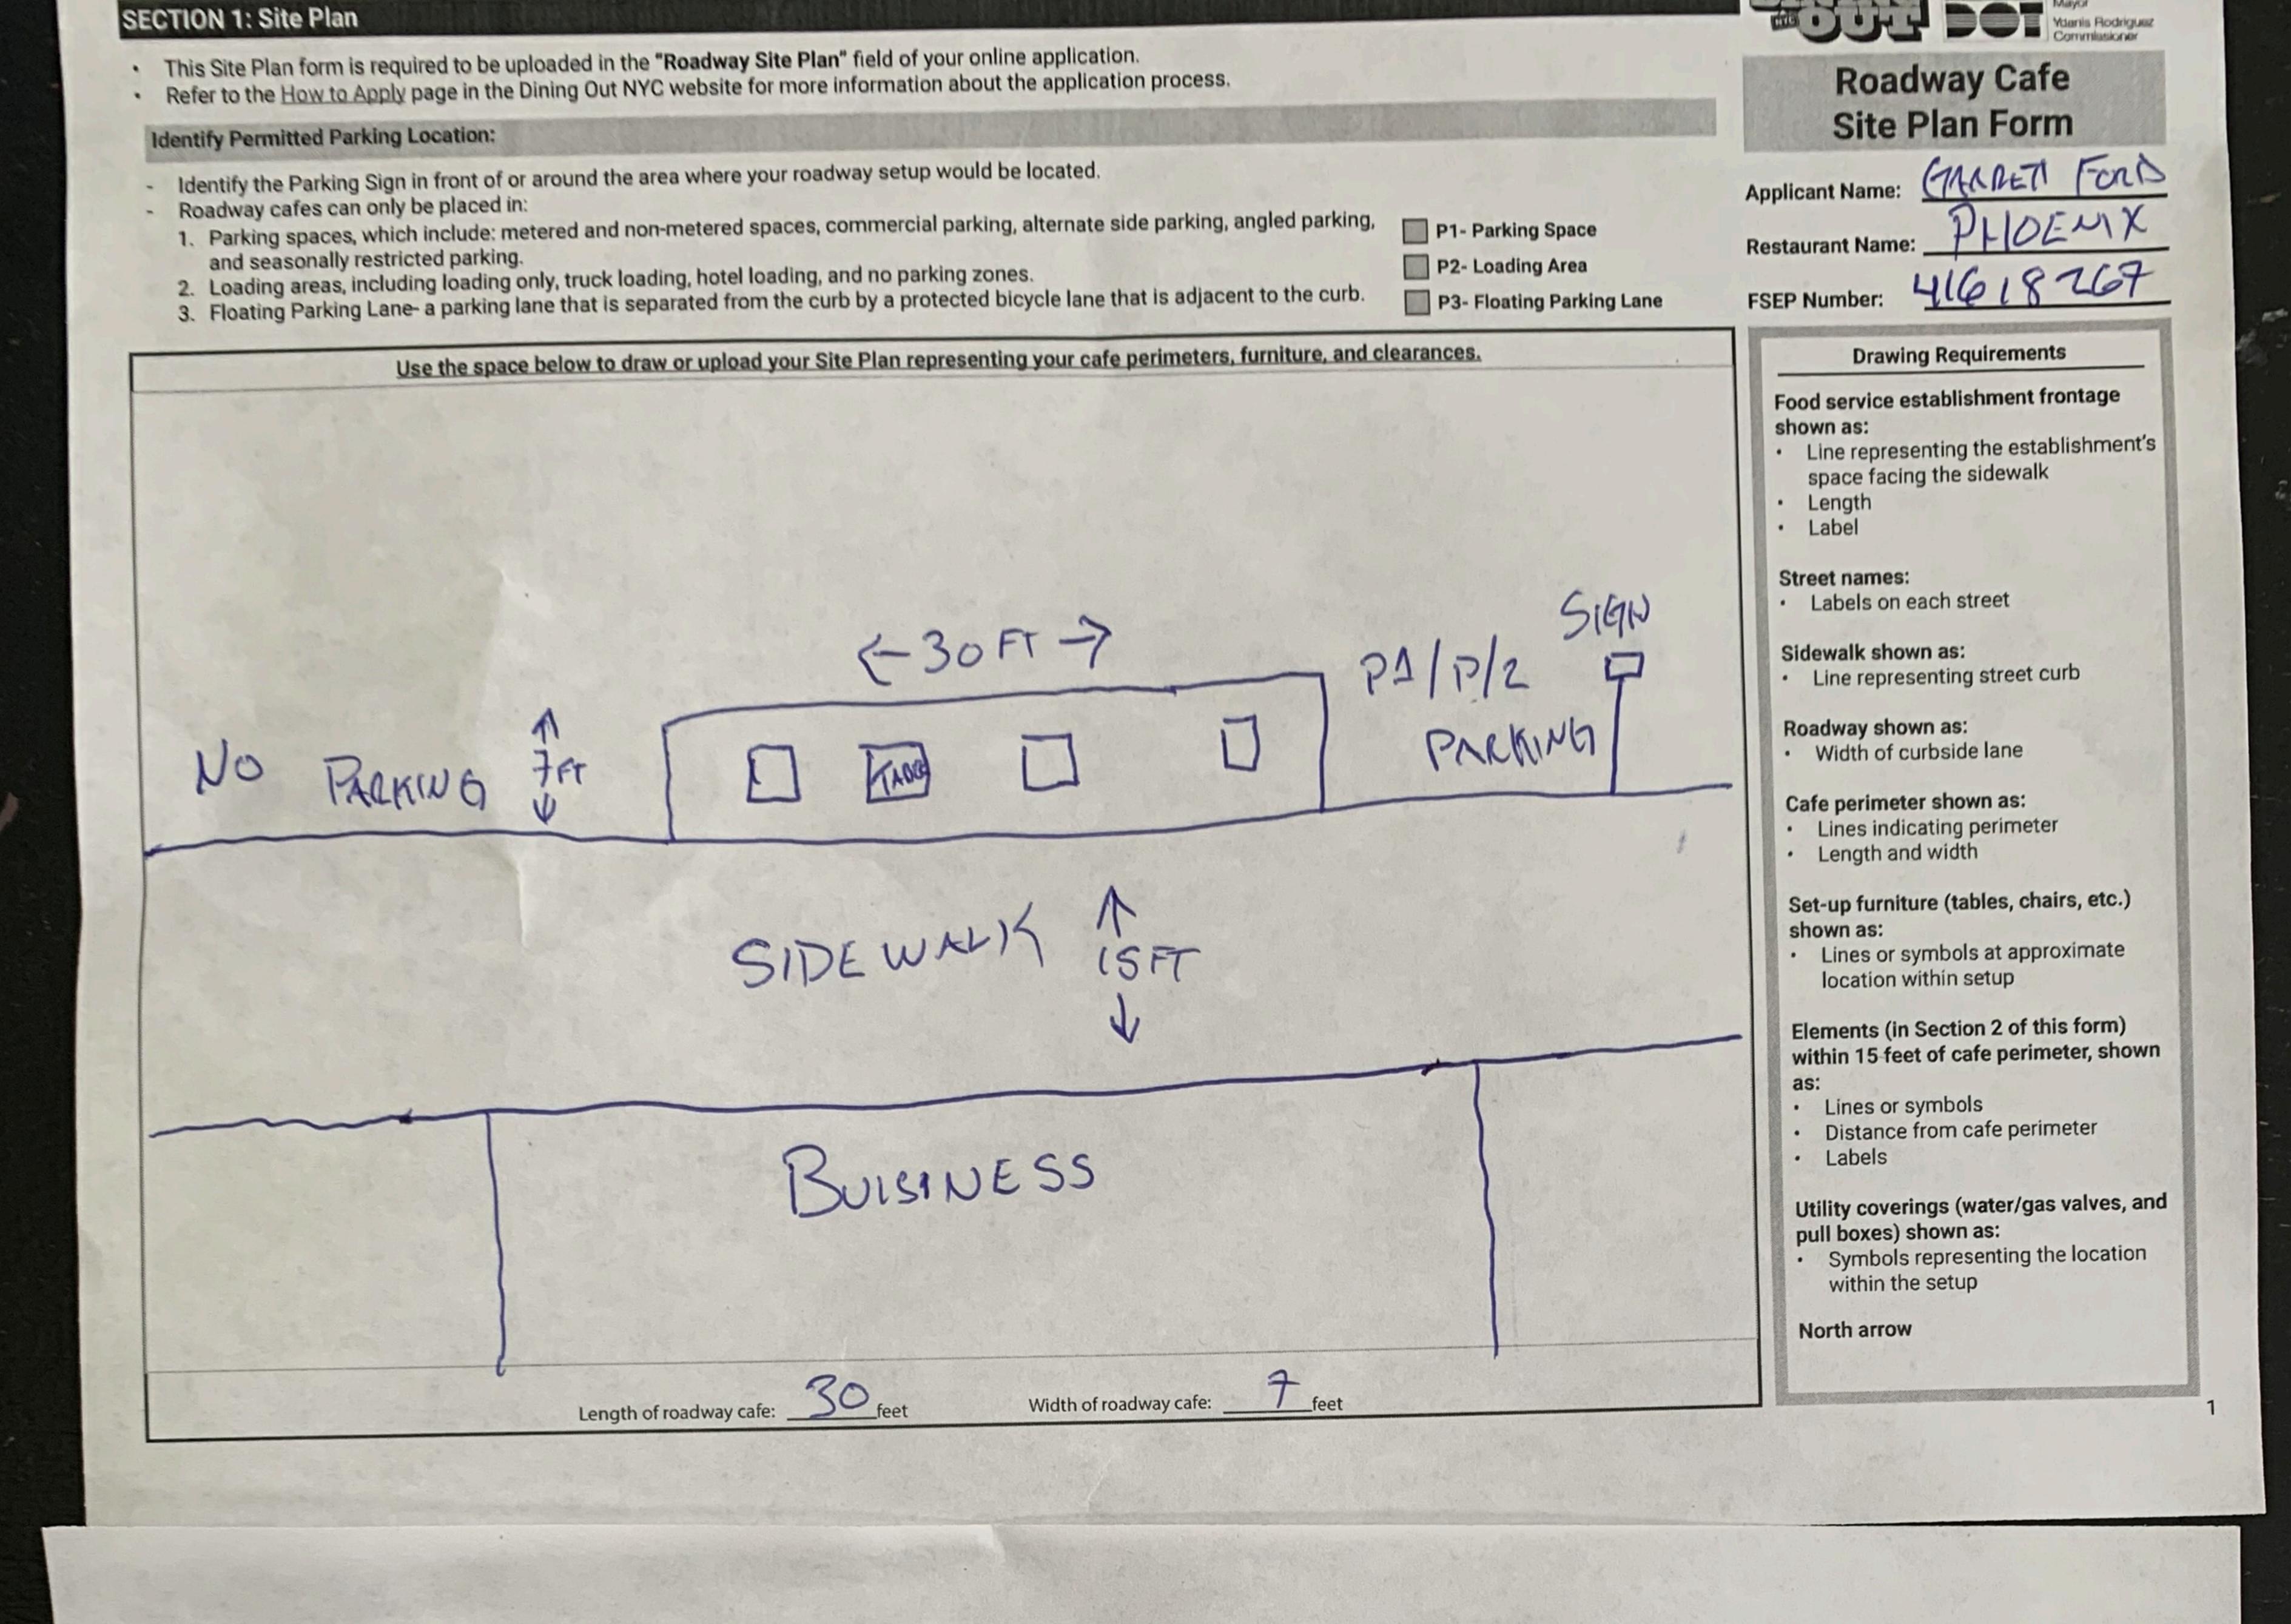

SECTION 2: Required Clearance	es			SECTION 3: Material Requirements		
 Please provide distances from the following objects. Only provide a distance if the listed object is within 15 feet of your proposed setup. Refer to the <u>Setup Guides</u> in the Dining Out NYC website for more information regarding clearances. 				 Please indicate which of the following materials will be part of your roadway cafe by checking the box next to the category. If applicable, please confirm the materials comply with the Dining Out NYC requirements. Refer to the <u>Setup Guides</u> in the Dining Out NYC website for more information regarding materials. 		
Elements with minimum 15 feet clearance from roadway cafe:				Materials Checklist:		
R01- Subway Stair: Open End	feet	R02- Fire Hydrant	feet	*Required*		
Elements with minimum 10 feet clea	arance from	roadway cafe:		Barriers (All of the following must be met)		
R03- Subway Elevator Entrance	feet	R05- MTA Curb Cut	feet	Maintained on all sides of the cafe except the side fronting the ground floor restaurant. Not permanently affixed to the roadway.		
R04- FDNY Curb Cut	feet			30-42 inches tall (excluding planting), and at least 4 inches in width.		
Elements with minimum 5 feet clear	ance from ro	adway cafe:		Barriers are interconnected with each other.		
			foot	Any cladding over the barriers is securely fastened or affixed. Minimum 4 inches wide reflective strip on each barrier on the outward facing side.		
R06- Curb Cut	feet	R11- CitiBike/Bike Share Station	feet	Water-filled with a minimum of 150 pounds per linear foot of barrier length.		
R07- Emergency Exit Hatch	feet	R12- Bike Corral	feet	and the state of t		
R08- Subway Stair: Closed End	feet	R13- Micromobility Station	feet	*Optional - Only check the material categories you intend to use in your roadway cafe*		
R09- Subway Elevator: Non-Entry	feet	R14- Drainage Infrastructure	feet			
R10- Bus Stop Pole: Non- Approaching Side	feet			Flooring (if using, all of the following must be met) Durable, lightweight, easily removable, mold-resistant, elevated from the ground level to allow for		
Elements with minimum 3 feet clears	ance from ro	adway cafe:		drainage, and removable to allow for cleaning. Flush with the curb line (except if located on a slope, be flush to the greatest extent feasible), and		
R15- Elevated Train Infrastructure	feet	R16- Transformer Vault	feet	compliant with applicable accessibility requirements.		
Elements with minimum 1 foor and 6		ranco from roadway cafe:		Maintains a 6 inch covered channel between curb and base of flooring to allow for drainage.		
	inches clea		inches	Furnishings (if using, all of the following must be met)		
R17- Vent Infrastructure: utility vent poles, vent grates, subway grates	feet	R18- Manholes —	Inches	Lightweight and easily movable. Vertical Screenings (if using, all of the following must be met)		
Elements with minimum 6 inches cle	aranga from	roadway cafe:	CONTRACTOR OF THE PARTY OF THE	Located between the barrier and 6 feet above the cafe base or floor.		
Service of the Control of the Contro	arance non	I loauway care.		Located on the roadway facing side, does not extend the beyond the perimeter of the roadway cafe, and is not affixed to the outward facing side of barriers.		
R19- Thermoplastic Marking	feet			Easily removable, comprised of non-opaque, fire-grade, and wind resistant materials.		
Roadway cafe distance from crosswa	alks:			If within 50 feet of any regulatory or warning signs, does not exceed 46 inches in height.		
			en berge en constant in	Overhead Coverings/ Umbrellas (if using, all of the following must be met)		
R20- Adjacent to non-approaching side of				Minimum of 7 feet and maximum of 10 feet from the base or floor of the roadway cafe. Has a weighted base and any support structures are not affixed to the outward facing side of barriers, are		
crosswalk		Distance required from	e required	of sufficient size and strength, made of durable materials, and free of defects.		
(min. 8 foot distance)	feet		ching side	Easily removable, comprised of fire-grade and wind resistant materials.		
R21- Adjacent to		Tion approaching side		If within 50 feet of any regulatory or warning signs, does not exceed 46 inches in height.		
approaching (stopping)				Lighting and Electrical Connections (if using, all of the following must be met)		
side of crosswalk (min. 20 foot distance)	feet			Any lighting is outdoor rated, properly secured, and lightweight.		
			- 60	At least 14 feet above sidewalk, and 18 feet above roadway.		
R22- No crosswalk present (maintain 20 feet from		8:0	20	Not attached to any City property, including street trees. Floctrical work complies with the applicable requirements set forth in DOT's rules and the New York City		
curb line of intersecting street)	feet			Electrical work complies with the applicable requirements set forth in DOT's rules and the New York City Electrical Code. Please note that this may require additional permits from DOB or FDNY, and/or approval from the Landmarks Preservation Commission (LPC) as applicable.		