



COMMUNITY BOARD FEEDBACK PACKAGE

Please review this application and provide the required feedback.

DINING OUT NYC

COMMUNITY BOARD RECOMMENDATION FORM

This form is to be used by community boards during the cafe review process. Any comments from the community board should be recorded on this form and submitted to NYC DOT. For information pertaining to specific cafe design requirements, visit the Dining Out NYC website for program legislation, rules, and Setup Guides.

Business Name:
Cafe Location:
Application Number:
CB Feedback Deadline (on date or next business day):
NYCDOT Internal Use Only
Roadway Cafe Setup Comments:
Comments related to the cafe's physical footprint and dimensions:
Comments related to pedestrian flow (i.e., visbility, safety , potential crowding):
Comments related to potential conflicts with existing curb use (i.e., planters, bike racks, bus stops):
Overall recommendation for the cafe setup:
Suggested modifications related to the above referenced application:
ouggested modifications related to the above referenced application.

RESTAURANT DETAILS

Food Service Establishment Permit(FSEP)

FSEP#: 50047650

Expiration Date: 03/31/2025 DOHMH Status: CURRENT

Business Legal Name: SECOND DESI GALLI, LLC

Assumed Name: DESI GALLI

Business Address: 172 AVENUE B, NEW YORK, NY 10009

Venue Type: Restaurant (no bar)

Last updated from DOHMH: 03/24/2025

Restaurant Information

Entity Type: Limited Liability Corporation (LLC)

Phone: (911) 714-0758

Email Address: priavanda@gmail.com

DOS Information

DOS ID#: 4849272

Process Name: Second Desi Galli LLC

DOS Address: 172 Avenue B, New York, New York 10009

NYS Liquor Authority Information

Establishment serves alcohol: No

Business hours

Sun:

12:00 PM- 10:00 PM

Mon:

12:00 PM- 10:00 PM

Tues:

12:00 PM- 10:00 PM

Wed:

12:00 PM- 10:00 PM

Thurs:

12:00 PM- 10:00 PM

Fri:

12:00 PM- 10:00 PM

Sat:

12:00 PM- 11:00 AM

SECTION 1: Site Plan

- · This Site Plan form is required to be uploaded in the "Roadway Site Plan" field of your online application.
- Refer to the How to Apply page in the Dining Out NYC website for more information about the application process.

Identify Permitted Parking Location:

- Identify the Parking Sign in front of or around the area where your roadway setup would be located.
- Roadway cafes can only be placed in:
 - Parking spaces, which include: metered and non-metered spaces, commercial parking, alternate side parking, angled parking, and seasonally restricted parking.
 - 2. Loading areas, including loading only, truck loading, hotel loading, and no parking zones.
 - 3. Floating Parking Lane- a parking lane that is separated from the curb by a protected bicycle lane that is adjacent to the curb.

Use the space below to draw or upload your Site Plan representing your cafe perimeters, furniture, and clearances.

P1- Parking Space

P2- Loading Area

P3- Floating Parking Lane FSEP Num


Roadway Cafe Site Plan Form

Applicant Name: Prior ande

Restaurant Name: DESI Cash

FSEP Number: 50047650

Drawing Requirements

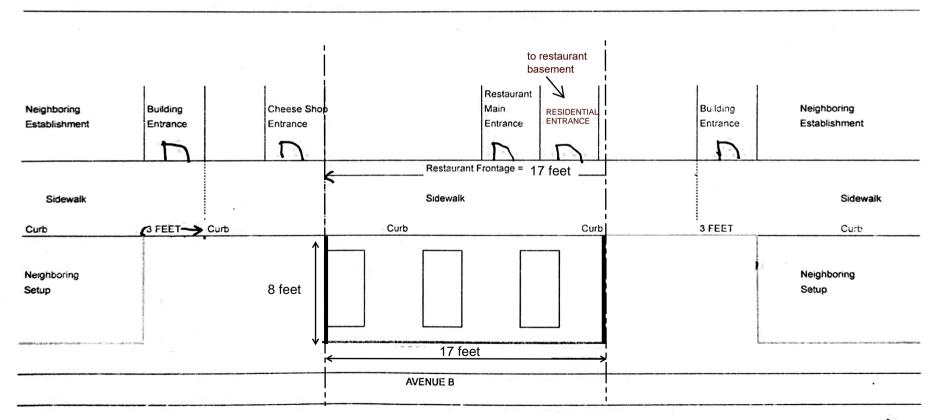

	es		
Please provide distances from the Only provide a distance if the liste Refer to the <u>Setup Guides</u> in the D	ed object is wit	ects. hin 15 feet of your proposed setup. : website for more information regarding	g clearances.
ements with minimum 15 feet cle	arance from re	padway cafe:	
R01- Subway Stair: Open End	feet	R02- Fire Hydrant	feet
ements with minimum 10 feet cle	arance from r	oadway cafe:	
RO3- Subway Elevator Entrance	feet	R05- MTA Curb Cut	feet
RO4- FDNY Curb Cut	feet		
ements with minimum 5 feet clea	rance from ro	adway cafe:	
R06- Curb Cut	feet	R11- CitiBike/Bike Share Station	feet
R07- Emergency Exit Hatch	feet	R12- Bike Corral	feet
R08- Subway Stair: Closed End	feet	R13- Micromobility Station	feet
R09- Subway Elevator: Non-Entry	feet	R14- Drainage Infrastructure	feet
R10- Bus Stop Pole:			
Non- Approaching Side	feet		
ements with minimum 3 feet clea	rance from ro	adway cafe:	
R15- Elevated Train Infrastructure	feet	R16- Transformer Vault	feet
lements with minimum 1 foor and	6 inches clea	rance from roadway cafe:	
R17- Vent Infrastructure: utility vent poles, vent grates, subway grates	feet	R18- Manholes	inches
lements with minimum 6 inches o	learance from	roadway cafe:	
R19-Thermoplastic Marking	feet	discontinual to place section () which are consistent enterested to the continual to the c	
toadway cafe distance from cross	walks:		
R20- Adjacent to non-approaching side of crosswalk (min. 8 foot distance)	feet	crosswalk on from cr	ce required cosswalk on aching side
R21- Adjacent to approaching (stopping) side of crosswalk (min. 20 foot distance)	feet		AL ACTOR
		8:05	ESS

SECTION 3: Material Requirements

- Please indicate which of the following materials will be part of your roadway cafe by checking the box next to the category. If applicable, please confirm the materials comply with the Dining Out NYC requirements.
 Refer to the <u>Setup Guides</u> in the Dining Out NYC website for more information regarding materials.

Materials Checklist:

1	*Required*	
Barri	ers (All of the following must be met)	
	Maintained on all sides of the cafe except the side fronting the ground floor restaurant.	
	Not permanently affixed to the roadway.	
	30-42 inches tall (excluding planting), and at least 4 inches in width.	
	Barriers are interconnected with each other.	
	Any cladding over the barriers is securely fastened or affixed.	
	Minimum 4 inches wide reflective strip on each barrier on the outward facing side.	
L	Water-filled with a minimum of 150 pounds per linear foot of barrier length.	
Op	tional - Only check the material categories you intend to use in your roadway cafe	
Floo	ring (if using, all of the following must be met)	
	Durable, lightweight, easily removable, mold-resistant, elevated from the ground level to allow for drainage, and removable to allow for cleaning.	
	If lush with the curb line (except if located on a slope, be flush to the greatest extent feasible), and compliant with applicable accessibility requirements.	
	Maintains a 6 inch covered channel between curb and base of flooring to allow for drainage.	
Furn	ishings (if using, all of the following must be met)	
	Lightweight and easily movable.	
Vert	ical Screenings (if using, all of the following must be met)	
	Located between the barrier and 6 feet above the cafe base or floor.	
0	Located on the roadway facing side, does not extend the beyond the perimeter of the roadway cafe, and is not affixed to the outward facing side of barriers.	
0	Easily removable, comprised of non-opaque, fire-grade, and wind resistant materials.	
_/	If within 50 feet of any regulatory or warning signs, does not exceed 46 inches in height.	
Ove	rhead Coverings/ Umbrellas (if using, all of the following must be met)	
	Minimum of 7 feet and maximum of 10 feet from the base or floor of the roadway cafe.	
E	Has a weighted base and any support structures are not affixed to the outward facing side of barriers, are of sufficient size and strength, made of durable materials, and free of defects.	
	Easily removable, comprised of fire-grade and wind resistant materials.	
_/	If within 50 feet of any regulatory or warning signs, does not exceed 46 inches in height.	
Ligh	ting and Electrical Connections (if using, all of the following must be met)	
E	Any lighting is outdoor rated, properly secured, and lightweight.	
[At least 14 feet above sidewalk, and 18 feet above roadway.	
[Not attached to any City property, including street trees.	
[Electrical work complies with the applicable requirements set forth in DOT's rules and the New York City Electrical Code. Please note that this may require additional permits from DOB or FDNY, and/or approval from the Landmarks Preservation Commission (LPC) as applicable.	•