

COMMUNITY BOARD FEEDBACK PACKAGE

Please review this application and provide the required feedback.

DINING OUT NYC

Business Name:

COMMUNITY BOARD RECOMMENDATION FORM

This form is to be used by community boards during the cafe review process. Any comments from the community board should be recorded on this form and submitted to NYC DOT. For information pertaining to specific cafe design requirements, visit the Dining Out NYC website for program legislation, rules, and Setup Guides.

VILLAGE SQUARE PIZZA

Cafe Location: 147 AVENUE A, NEW YORK, NY, 10009 **Application Number:** 20240531010001 11/20/2024 **Recommendation Response Deadline:** NYCDOT Internal Use Only **Roadway Cafe Setup Comments:** Comments related to the cafe's physical footprint and dimensions: Comments related to **pedestrian flow** (i.e., visbility, safety, potential crowding): Comments related to potential conflicts with existing curb use (i.e., planters, bike racks, bus stops): Overall recommendation for the cafe setup: Suggested modifications related to the above referenced application:

Restaurant Details- VILLAGE SQUARE PIZZA (20240531010001)

Food Service Establishment Permit(FSEP)

FSEP#: 50089107

Expiration Date: 02/28/2025

DOHMH Status: CURRENT

Business Legal Name: THE VILLAGE SQUARE PIZZA INC

Assumed Name: VILLAGE SQUARE PIZZA

Business Address: 147 AVENUE A, NEW YORK, NY 10009

Venue Type: Restaurant (no bar)

Last updated from DOHMH: 10/21/2024

Restaurant Information

Phone: (917) 675-7709

Email Address: villagesquarepizza@gmail.com

DOS Information

DOS ID#: 50089107

Process Name: The Village Square Pizza Inc.

DOS Address: 147 Avenue A, New York, New York 10009

NYS Liquor Authority Information

Establishment serves alcohol: No

User Information

Created By: James Kwon

Created On: 5/23/2024 10:55:59 PM

Modified By: Chase Ridge

Modified On: 10/16/2024 1:57:01 PM

Business hours

Sun: 12:00 PM- 12:00 AM

Mon: 12:00 PM- 12:00 PM

Tues: 12:00 PM- 12:00 PM


Wed: 12:00 PM- 12:00 PM


Thurs: 12:00 PM- 12:00 PM

Fri: 12:00 PM- 12:00 PM

Sat: 12:00 PM- 12:00 PM

Site Photos- VILLAGE SQUARE PIZZA (20240531010001)

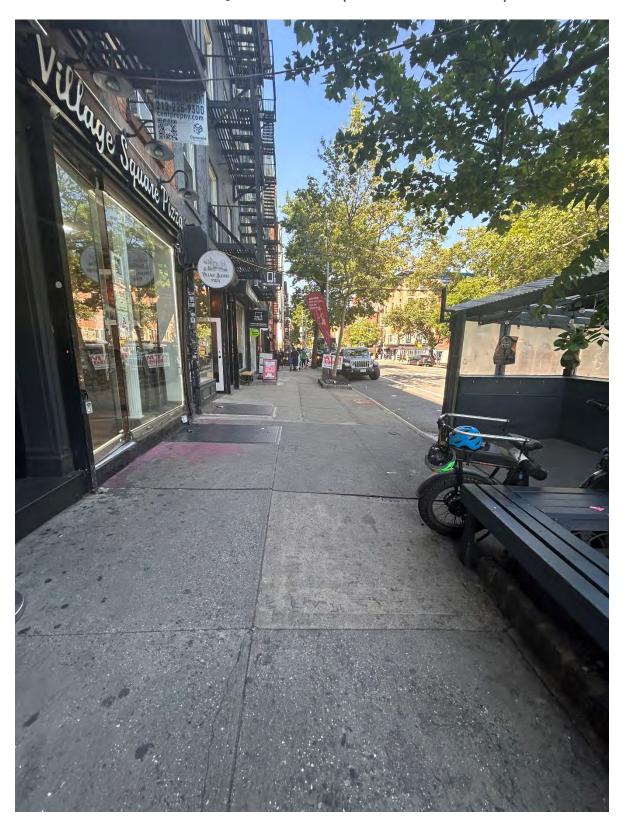

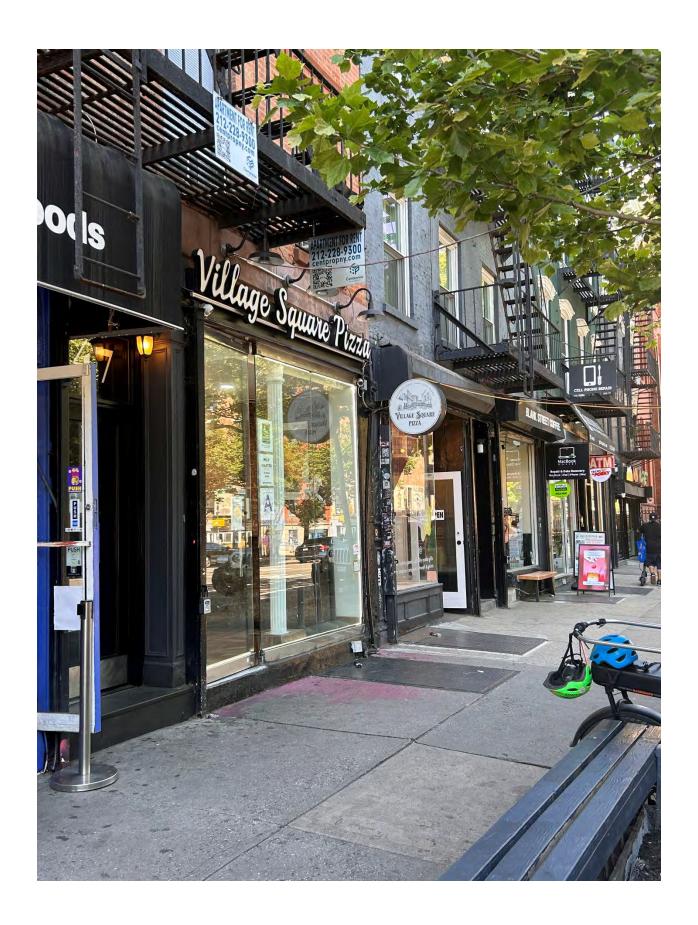







SECTION 1: Site Plan

- This Site Plan form is required to be uploaded in the "Roadway Site Plan" field of your online application.
- Refer to the How to Apply page in the Dining Out NYC website for more information about the application process.


Identify Permitted Parking Location:

- Identify the Parking Sign in front of or around the area where your roadway setup would be located.
- Roadway cafes can only be placed in:
 - 1. Parking spaces, which include: metered and non-metered spaces, commercial parking, alternate side parking, angled parking, and seasonally restricted parking.
 - 2. Loading areas, including loading only, truck loading, hotel loading, and no parking zones.

Length of roadway cafe:

3. Floating Parking Lane- a parking lane that is separated from the curb by a protected bicycle lane that is adjacent to the curb.

▼ P1- Parking Space
P2- Loading Area
DO Flaction Deviction Law

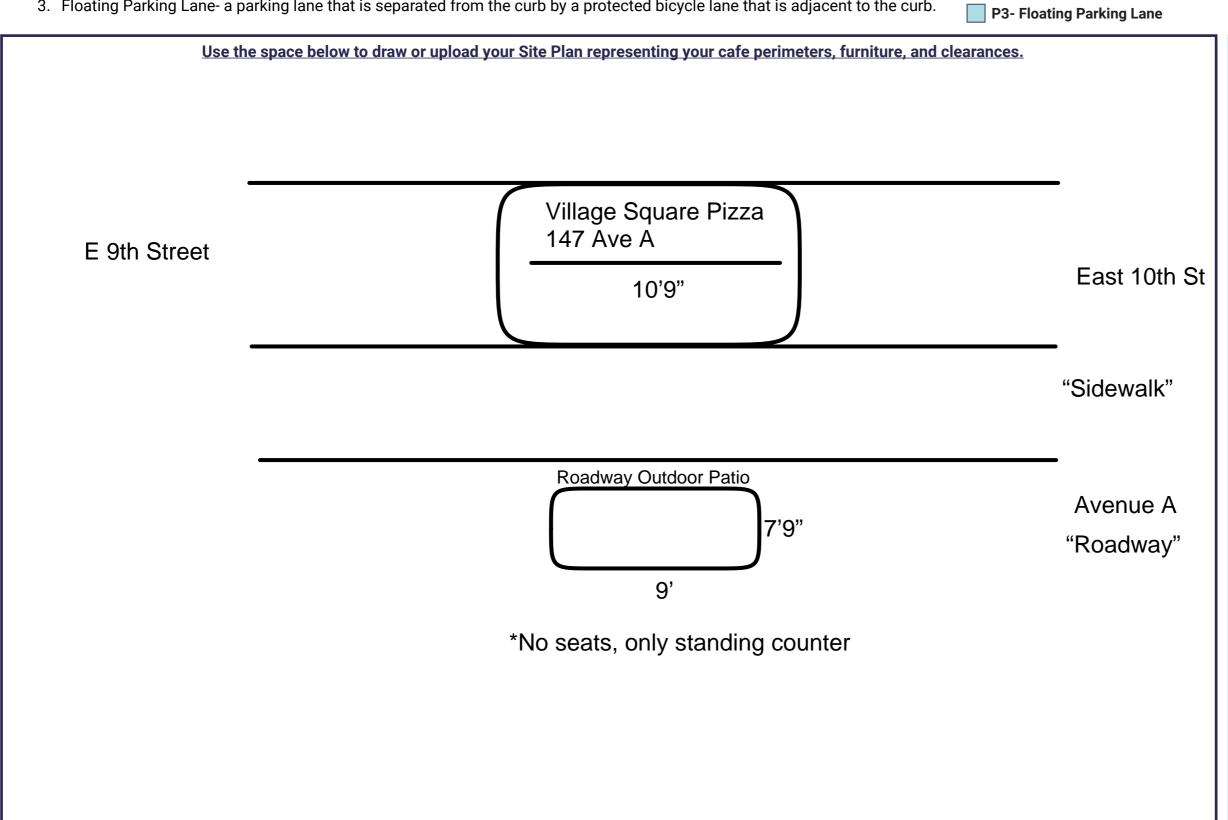





Roadway Cafe Site Plan Form

The Village Square

Applicant Name: Pizza IInc

Restaurant Name: Village Square Pizza

50089107 **FSEP Number:**

Drawing Requirements

Food service establishment frontage shown as:

- Line representing the establishment's space facing the sidewalk
- Length
- Label

Street names:

· Labels on each street

Sidewalk shown as:

Line representing street curb

Roadway shown as:

Width of curbside lane

Cafe perimeter shown as:

- Lines indicating perimeter
- Length and width

Set-up furniture (tables, chairs, etc.) shown as:

 Lines or symbols at approximate location within setup

Elements (in Section 2 of this form) within 15 feet of cafe perimeter, shown

- Lines or symbols
- Distance from cafe perimeter
- Labels

Utility coverings (water/gas valves, and pull boxes) shown as:

Symbols representing the location within the setup

North arrow

SECTION 2: Required Clearances


- Please provide distances from the following objects.
- Only provide a distance if the listed object is within 15 feet of your proposed setup.
- Refer to the <u>Setup Guides</u> in the Dining Out NYC website for more information regarding clearances.


Elements with minimum 15 feet	clearance from ro	padway cafe:		
R01- Subway Stair: Open End	feet	R02- Fire Hydrant	feet	
Elements with minimum 10 feet	clearance from ro	padway cafe:		
R03- Subway Elevator Entrance	feet	R05- MTA Curb Cut	feet	
Elements with minimum 5 feet c	learance from roa	ndway cafe:		
R06- Curb Cut R07- Emergency Exit Hatch R08- Subway Stair: Closed End R09- Subway Elevator: Non-Entry R10- Bus Stop Pole:	feetfeetfeetfeet	R11- CitiBike/Bike Share Station R12- Bike Corral R13- Micromobility Station R14- Drainage Infrastructure	feetfeetfeetfeet	
Non- Approaching Side Elements with minimum 3 feet c	feet learance from roa	adway cafe:		
R15- Elevated Train Infrastructure	feet	R16- Transformer Vault	feet	
Elements with minimum 1 foor a	nd 6 inches clear	ance from roadway cafe:		
R17- Vent Infrastructure: utility vent poles, vent grates, subway grates	feet	R18- Manholes	inches	
Elements with minimum 6 inches	s clearance from	roadway cafe:		
R19- Thermoplastic Marking	feet			
Roadway cafe distance from crosswalks:				
R20- Adjacent to non-approaching side of crosswalk		Distance required from	Distance required	

non-approaching side of
crosswalk
(min. 8 foot distance)

R21- Adjacent to
approaching (stopping)
side of crosswalk
(min. 20 foot distance)

feet



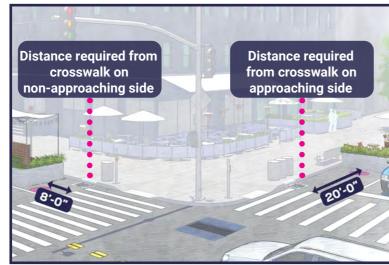

Check this box if none of the objects listed above are within 15 feet of the proposed setup.

feet

SECTION 3: Material Requirements

- Please indicate which of the following materials will be part of your roadway cafe by checking the box next to the category. If applicable, please confirm the materials comply with the Dining Out NYC requirements.
- Refer to the Setup Guides in the Dining Out NYC website for more information regarding materials.

Materials Checklist:

Required				
X Barriers (All of the following must be met)				
$oxed{X}$ Maintained on all sides of the cafe except the side fronting the ground floor restaurant.				
Not permanently affixed to the roadway.				
igwedge 30-42 inches tall (excluding planting), and at least 4 inches in width.				
Barriers are interconnected with each other.				
Any cladding over the barriers is securely fastened or affixed.				
Minimum 4 inches wide reflective strip on each barrier on the outward facing side.				
f X Water-filled with a minimum of 150 pounds per linear foot of barrier length.				
Optional - Only check the material categories you intend to use in your roadway cafe				
Flooring (if using, all of the following must be met)				
Durable, lightweight, easily removable, mold-resistant, elevated from the ground level to allow for drainage, and removable to allow for cleaning.				
Flush with the curb line (except if located on a slope, be flush to the greatest extent feasible), and				
compliant with applicable accessibility requirements.				
Maintains a 6 inch covered channel between curb and base of flooring to allow for drainage.				
Furnishings (if using, all of the following must be met)				
Lightweight and easily movable.				
Vertical Screenings (if using, all of the following must be met)				
Located between the barrier and 6 feet above the cafe base or floor.				
Located on the roadway facing side, does not extend the beyond the perimeter of the roadway cafe, and				
is not affixed to the outward facing side of barriers.				
Easily removable, comprised of non-opaque, fire-grade, and wind resistant materials.				
If within 50 feet of any regulatory or warning signs, does not exceed 46 inches in height.				
Overhead Coverings/ Umbrellas (if using, all of the following must be met)				
Minimum of 7 feet and maximum of 10 feet from the base or floor of the roadway cafe.				
Has a weighted base and any support structures are not affixed to the outward facing side of barriers, are of sufficient size and strength, made of durable materials, and free of defects.				
Easily removable, comprised of fire-grade and wind resistant materials.				
If within 50 feet of any regulatory or warning signs, does not exceed 46 inches in height.				
Lighting and Electrical Connections (if using, all of the following must be met)				
Any lighting is outdoor rated, properly secured, and lightweight.				
At least 14 feet above sidewalk, and 18 feet above roadway.				
Not attached to any City property, including street trees.				
Electrical work complies with the applicable requirements set forth in DOT's rules and the New York City				
Electrical Code. Please note that this may require additional permits from DOB or FDNY, and/or approval from the Landmarks Preservation Commission (LPC) as applicable.				