



Eric Adams Mayor Ydanis Rodriguez Commissioner

COMMUNITY BOARD FEEDBACK PACKAGE

Please review this application and provide the required feedback.

DINING OUT NYC

COMMUNITY BOARD RECOMMENDATION FORM

This form is to be used by community boards during the cafe review process. Any comments from the community board should be recorded on this form and submitted to NYC DOT. For information pertaining to specific cafe design requirements, visit the Dining Out NYC website for program legislation, rules, and Setup Guides.

Business Name:	DON CEVICHE		
Cafe Location:	57 1ST AVE, NEW YORK, NY, 10003		
Application Number: 20240702010005			
Recommendation	Response Deadline:11/27/2024		
NYCDOT Internal Use Only			

Roadway Cafe Setup Comments:

Comments related to the cafe's physical footprint and dimensions:

Comments related to **pedestrian flow** (i.e., visbility, safety , potential crowding):

Comments related to potential conflicts with existing curb use (i.e., planters, bike racks, bus stops):

Overall recommendation for the cafe setup:

Suggested modifications related to the above referenced application:

Restaurant Details- DON CEVICHE (20240702010005)

Food Service Establishment Permit(FSEP)

FSEP#: 50132615

Expiration Date: 02/28/2025

DOHMH Status: CURRENT

Business Legal Name: DON CEVICHE NYC CORP

Assumed Name: DON CEVICHE

Business Address: 57 1ST AVE, NEW YORK, NY 10003

Venue Type: Restaurant (with bar)

Last updated from DOHMH: 10/28/2024

Restaurant Information

Phone: (917) 675-6115

Email Address: donceviche.nyc@yahoo.com

DOS Information

DOS ID#: 6027166

Process Name: DON CEVICHE NYC CORP

DOS Address: 120 1ST AVENUE, NEW YORK, New York 10009

NYS Liquor Authority Information

NYSLA Serial No: 024023160696

License Type: On-Premises

Name of License: DON CEVICHE NYC CORP

Title of Representative: PRESIDENT

Name of Certificate Holder: DON CEVICHE NYC CORP

User Information

Created By: Celso Costas Ramirez

Created On: 7/2/2024 5:12:21 PM

Modified By: CELSO COSTAS

Modified On: 7/2/2024 6:11:53 PM

Business hours

Sun: 11:00 AM- 11:00 PM

Mon: 11:00 AM- 11:00 PM


Tues: 11:00 AM- 11:00 PM

Wed: 11:00 AM- 11:00 PM


Thurs: 11:00 AM- 11:00 PM


Fri: 11:00 AM- 11:00 PM


Sat: 11:00 AM- 11:00 PM

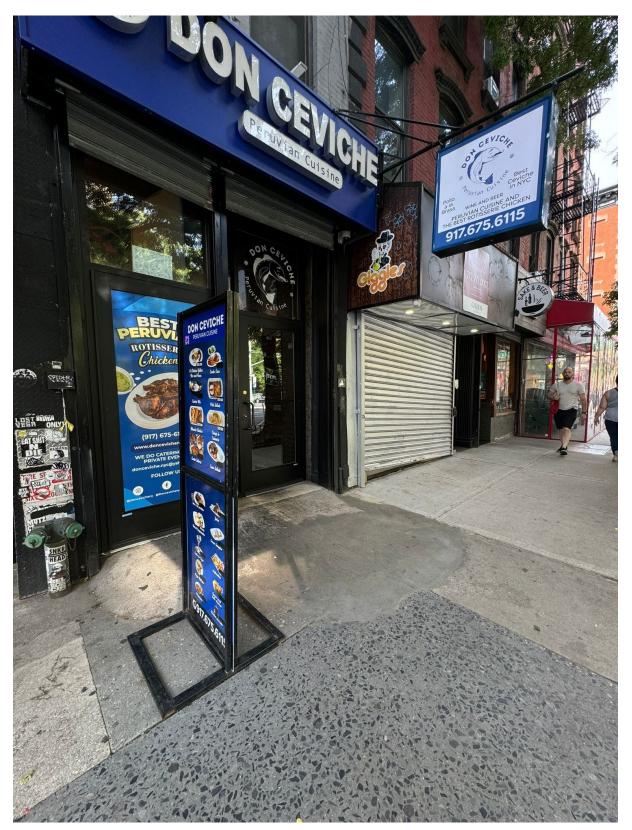


Site Photos- DON CEVICHE (20240702010005)

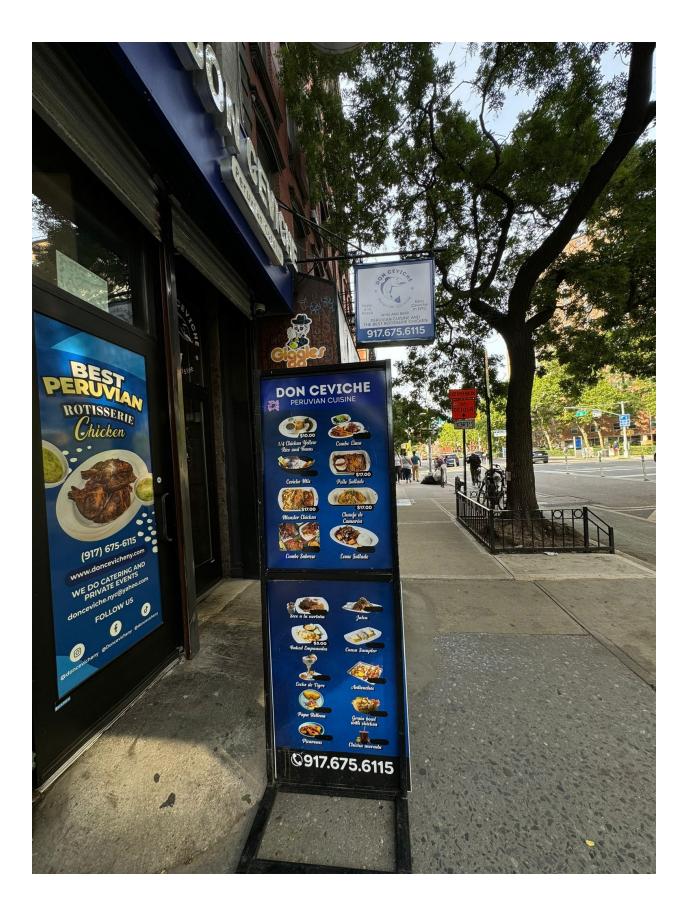

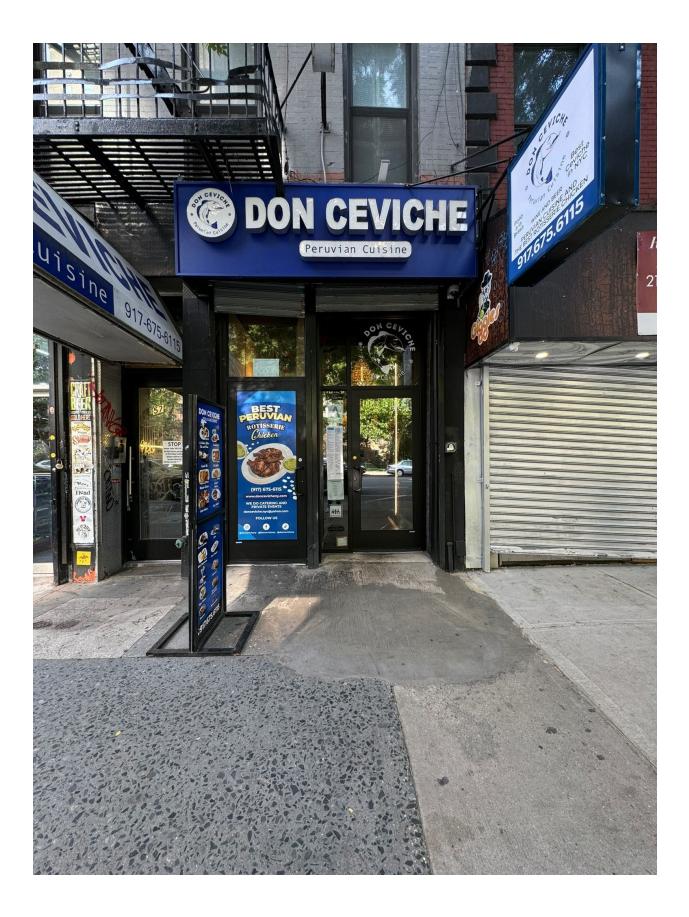

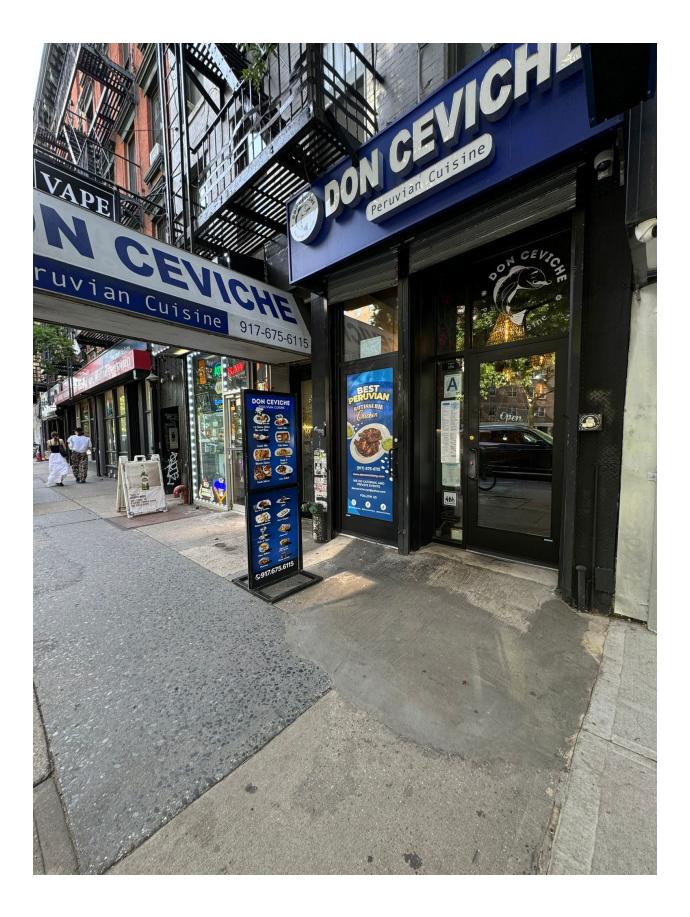



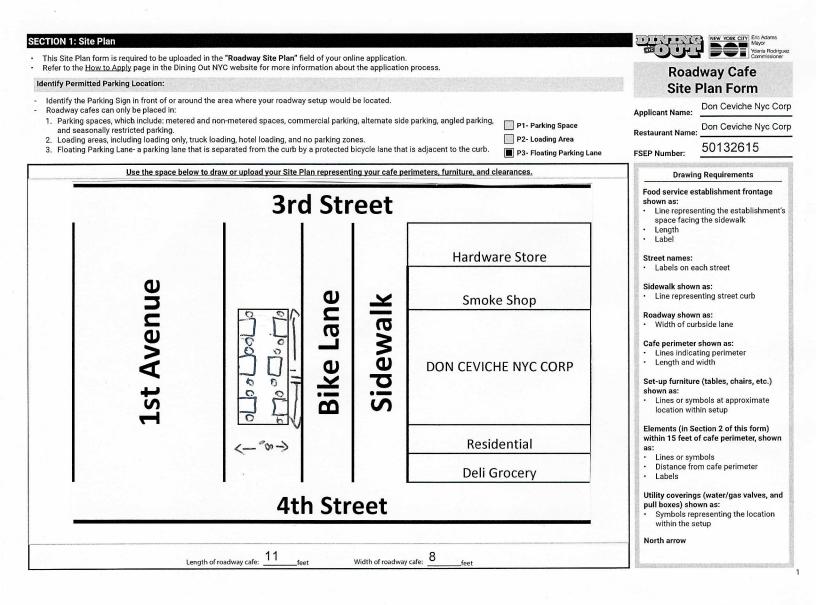

SECTION 2: Required Clearances

Elements with minimum 15 feet clea	rance from r	oadway cafe:	
R01- Subway Stair: Open End	feet	R02- Fire Hydrant	feet
Elements with minimum 10 feet clea	rance from r	oadway cafe:	
R03- Subway Elevator Entrance	feet	R05- MTA Curb Cut	feet
R04- FDNY Curb Cut	feet		
Elements with minimum 5 feet cleara	ance from ro	adway cafe:	
R06- Curb Cut	feet	R11- CitiBike/Bike Share Station	feet
R07- Emergency Exit Hatch	feet	R12- Bike Corral	feet
R08- Subway Stair: Closed End	feet	R13- Micromobility Station	feet
R09- Subway Elevator: Non-Entry	feet	R14- Drainage Infrastructure	feet
R10- Bus Stop Pole:			
Non- Approaching Side	feet		
Elements with minimum 3 feet clear	ance from ro	adway cafe:	
R15- Elevated Train Infrastructure	feet	R16- Transformer Vault	feet
Elements with minimum 1 foor and 6	inches clea	rance from roadway cafe:	
R17- Vent Infrastructure: utility vent poles, vent grates, subway grates	feet	R18- Manholes	inche
Elements with minimum 6 inches cle	arance from	roadway cafe:	
R19- Thermoplastic Marking	feet		
Roadway cafe distance from crossw	alks:		
R20- Adjacent to			
non-approaching side of			
crosswalk (min. 8 foot distance)	feet		nce required crosswalk on
	leet		oaching side
R21- Adjacent to approaching (stopping)			
side of crosswalk			
(min. 20 foot distance)	feet		
R22- No crosswalk present		TR	20'0
(maintain 20 feet from			
curb line of intersecting	6		- marine
street)	feet		all internet

SECTION 3: Material Requirements

Please indicate which of the following materials will be part of your roadway cafe by checking the box next to the category. If applicable, please confirm the materials comply with the Dining Out NYC requirements. Refer to the <u>Setup Guides</u> in the Dining Out NYC website for more information regarding materials.

Doguirod

Materials Checklist:

	<u></u>
Bar	iers (All of the following must be met)
	Maintained on all sides of the cafe except the side fronting the ground floor restaurant.
	Not permanently affixed to the roadway.
and a special of	30-42 inches tall (excluding planting), and at least 4 inches in width.
	Barriers are interconnected with each other.
	Any cladding over the barriers is securely fastened or affixed.
	Minimum 4 inches wide reflective strip on each barrier on the outward facing side.
	Water-filled with a minimum of 150 pounds per linear foot of barrier length.
0	tional - Only check the material categories you intend to use in your roadway cafe
Floe	ring (if using, all of the following must be met)
	Durable, lightweight, easily removable, mold-resistant, elevated from the ground level to allow for drainage, and removable to allow for cleaning.
	Flush with the curb line (except if located on a slope, be flush to the greatest extent feasible), and compliant with applicable accessibility requirements.
	Maintains a 6 inch covered channel between curb and base of flooring to allow for drainage.
Fur	nishings (if using, all of the following must be met)
	Lightweight and easily movable.
Ver	tical Screenings (if using, all of the following must be met)
	Located between the barrier and 6 feet above the cafe base or floor.
-	Located on the roadway facing side, does not extend the beyond the perimeter of the roadway cafe, and is not affixed to the outward facing side of barriers.
	Easily removable, comprised of non-opaque, fire-grade, and wind resistant materials.
	If within 50 feet of any regulatory or warning signs, does not exceed 46 inches in height.
Ove	rhead Coverings/ Umbrellas (if using, all of the following must be met)
	Minimum of 7 feet and maximum of 10 feet from the base or floor of the roadway cafe.
	Has a weighted base and any support structures are not affixed to the outward facing side of barriers, are of sufficient size and strength, made of durable materials, and free of defects.
	Easily removable, comprised of fire-grade and wind resistant materials.
	If within 50 feet of any regulatory or warning signs, does not exceed 46 inches in height.
Lig	nting and Electrical Connections (if using, all of the following must be met)
	Any lighting is outdoor rated, properly secured, and lightweight.
	At least 14 feet above sidewalk, and 18 feet above roadway.
	Not attached to any City property, including street trees.
	Electrical work complies with the applicable requirements set forth in DOT's rules and the New York City Electrical Code. Please note that this may require additional permits from DOB or FDNY, and/or approval from the Landmarks Preservation Commission (LPC) as applicable.

2