



COMMUNITY BOARD FEEDBACK PACKAGE

Please review this application and provide the required feedback.

DINING OUT NYC

Business Name:

COMMUNITY BOARD RECOMMENDATION FORM

This form is to be used by community boards during the cafe review process. Any comments from the community board should be recorded on this form and submitted to NYC DOT. For information pertaining to specific cafe design requirements, visit the Dining Out NYC website for program legislation, rules, and Setup Guides.

THE SCRATCHER CAFE

209 EAST 5 STREET, NEW YORK, NY, 10003 **Cafe Location:** 20240723010032 **Application Number:** 11/27/2024 **Recommendation Response Deadline:** NYCDOT Internal Use Only **Roadway Cafe Setup Comments:** Comments related to the cafe's physical footprint and dimensions: Comments related to **pedestrian flow** (i.e., visbility, safety, potential crowding): Comments related to potential conflicts with existing curb use (i.e., planters, bike racks, bus stops): Overall recommendation for the cafe setup: Suggested modifications related to the above referenced application:

Restaurant Details- THE SCRATCHER CAFÉ (20240723010032)

Food Service Establishment Permit(FSEP)

FSEP#: 40400810

Expiration Date: 06/30/2025

DOHMH Status: CURRENT

Business Legal Name: THE SCRATCHER CAFE INC

Assumed Name: THE SCRATCHER CAFE

Business Address: 209 EAST 5 STREET, NEW YORK, NY 10003

Venue Type: Bar/Tavern/Lounge

Last updated from DOHMH: 10/28/2024

Restaurant Information

Phone: (914) 740-3580

Email Address: kellymlk136@GMAIL.COM

DOS Information

DOS ID#: 1892393

Process Name: THE CORPORATION

DOS Address: 209 E 5TH ST, NEW YORK, New York 10003

NYS Liquor Authority Information

NYSLA Serial No: 034023131642

License Type: On-Premises

Name of License: DERMOT BURKE

Title of Representative: PRESIDENT

Name of Certificate Holder: THE SCRATCHER CAFE INC

User Information

Created By: Michael Kelly

Created On: 7/23/2024 10:26:53 PM

Modified By: Michael Kelly

Modified On: 7/23/2024 10:26:53 PM

Business hours

Sun: 4:00 PM- 12:00 AM

Mon: 4:00 PM- 12:00 AM

Tues: 4:00 PM- 1:00 AM


Wed: 4:00 PM- 1:00 AM


Thurs: 4:00 PM- 1:00 AM

Fri: 4:00 PM- 3:00 AM

Sat: 4:00 PM- 3:00 AM

Site Photos-THE SCRATCHER CAFÉ (20240723010032)

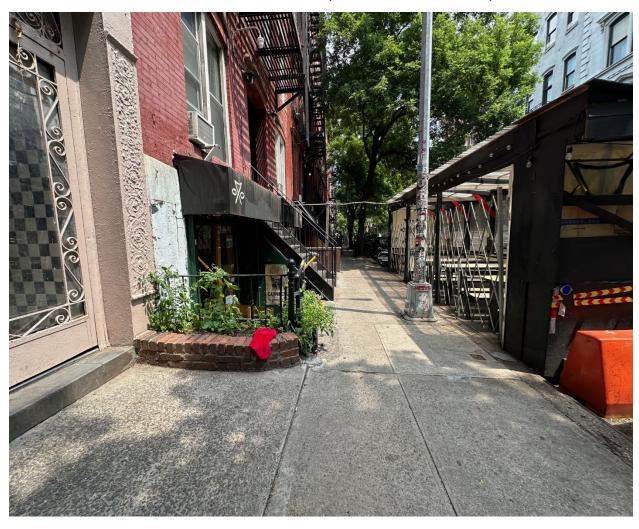

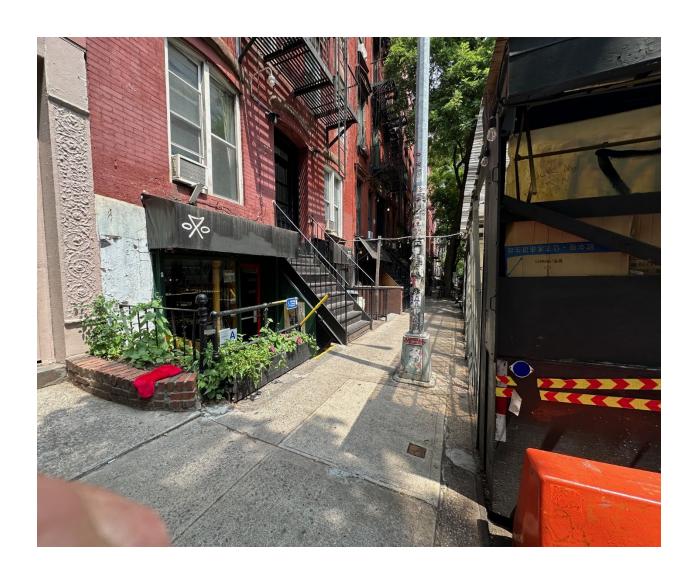







SECTION 1: Site Plan


- · This Site Plan form is required to be uploaded in the "Roadway Site Plan" field of your online application.
- Refer to the How to Apply page in the Dining Out NYC website for more information about the application process.

Identify Permitted Parking Location:

Identify the Parking Sign in front of or around the area where your roadway setup would be located.

Length of roadway cafe: 6.5

- Roadway cafes can only be placed in:
 - 1. Parking spaces, which include: metered and non-metered spaces, commercial parking, alternate side parking, angled parking, and seasonally restricted parking.
 - 2. Loading areas, including loading only, truck loading, hotel loading, and no parking zones.
 - 3. Floating Parking Lane- a parking lane that is separated from the curb by a protected bicycle lane that is adjacent to the curb.

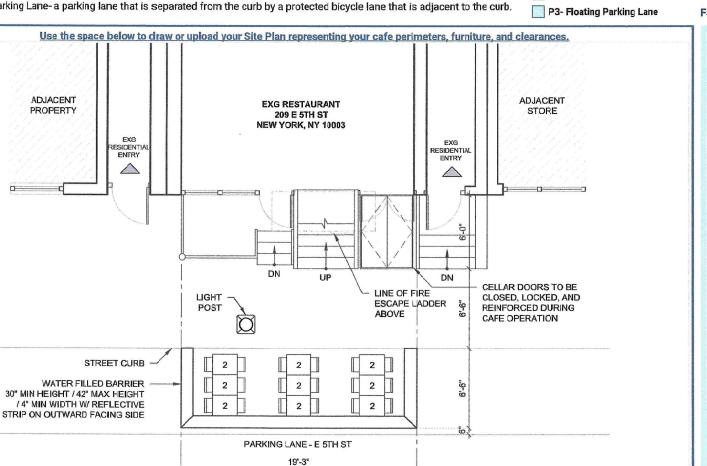

Width of roadway cafe: 19.2

_feet

19'-3" (RESTAURANT FRONTAGE)





Roadway Cafe Site Plan Form

The scratcher Cafe Inc **Applicant Name:**

Restaurant Name:

The Scratcher Cafe

FSEP Number:

P1- Parking Space

P2- Loading Area

404 00810

Drawing Requirements

Food service establishment frontage shown by:

- Line representing space occupied in building
- Labels
- Length

Street names:

Labels on each street

Sidewalk shown as:

- Line representing street curb
- Width measured from building line to curb line

Roadway shown as:

- Lines indicating parking lane
- · Width of parking lane

Cafe perimeter shown as:

- · Lines indicating perimeter
- Length and width of all three sides

Set-up furniture (tables, chairs, etc.) shown as:

Lines or symbols at approximate location within setup

Elements or objects shown as:

- Lines or symbols
- Labels
- Distance from cafe perimeter

Utility coverings shown as:

Symbols representing the approximate shape of the covering within the setup

Q MANHOLE COVER

M UTILITY COVERING

SECTION 2: Required Clearances

- Please provide distances from the following objects.
- Only provide a distance if the listed object is within 15 feet of your proposed setup.
- Leave box blank if not applicable.

R21- No crosswalk present

street)

(maintain 20 feet from curb line of intersecting

Refer to the Setup Guides in the Dining Out NYC website for more information regarding clearances.

Elements with minimum 15 feet	clearance from	roadway cafe:	
R01- Subway Stair: Open End R02- Fire Hydrant	feet		
Elements with minimum 10 feet	clearance from a	nadway cafe:	
	orearance monn	oddinay care.	
R03- Subway Elevator Entrance	feet		
R04- FDNY Curb Cut	feet		
R05- MTA Curb Cut	feet		
Elements with minimum 5 feet cl	earance from ro	adway cafe:	
R06- Curb Cut	feet	R11- CitiBike/Bike Sha	re Station feet
R07- Emergency Exit Hatch	feet	R12- Bike Corral	feet
R08- Subway Stair: Closed End	feet	R13- Micromobility Sta	ntionfeet
R09- Subway Elevator: Non-Entry	feet	R14- Drainage Infrastr	ucturefeet
R10- Bus Stop Pole:			
Non- Approaching Side	feet		
Elements with minimum 3 feet cl	earance from ro	adway cafe:	
R15- Elevated Train Infrastructure	efeet		
R16- Transformer Vault	feet		
Elements with minimum 1 foor ar	nd 6 inches clear	rance from roadway cafe:	
R17- Vent Infrastructure	feet		
Elements with minimum 6 inches	clearance from	roadway cafe:	
R18- Thermoplastic Marking	feet		
Roadway cafe distance from cros	swalks:		
R19- Adjacent to non-approaching side of crosswalk		Distance required from	Distance required
(min. 8 foot distance)	feet	crosswalk on	from crosswalk on
R20- Adjacent to		non-approaching side	approaching side
approaching (stopping)			0
side of crosswalk	feet		

feet

SECTION 3: Material Requirements

- Please indicate which of the following materials will be part of your roadway cafe by checking the box next to the category. If applicable, please confirm the materials comply with the Dining Out NYC requirements.
- Refer to the Setup Guides in the Dining Out NYC website for more information regarding materials.

Materials Checklist: *Required* Barriers Maintained on all sides of the cafe except the side fronting the ground floor restaurant. Not permanently affixed to the roadway. 30-42 inches tall (excluding planting), and at least 4 inches in width. Barriers are interconnected with each other. Any cladding over the barriers is securely fastened or affixed. Minimum 4 inches wide reflective strip on each barrier on the outward facing side. Water-filled with a minimum of 150 pounds per linear foot of barrier length. If your proposed barriers will utilize fill materials other than water please check this box. This may require additional information from the applicant and further review by the Dining Out NYC team, as well as supporting DOT units and City agencies. *Optional- Only check the material categories you intend to use in your roadway cafe* Flooring Durable, lightweight, easily removable, mold-resistant, elevated from the ground level to allow for drainage, and removable to allow for cleaning. Flush with the curb line (except if located on a slope, be flush to the greatest extent feasible), and compliant with applicable accessibility requirements. Maintains a 6 inch covered channel between curb and base of flooring to allow for drainage. **Furnishings** Lightweight and easily movable. Vertical Screenings Located between the barrier and 6 feet above the cafe base or floor. Located on the roadway facing side, does not extend the beyond the perimeter of the roadway cafe, and is not affixed to the outward facing side of barriers. Easily removable, comprised of non-opaque, fire-grade, and wind resistant materials. If within 50 feet of any regulatory or warning signs, does not exceed 46 inches in height. Overhead Coverings/ Umbrellas Minimum of 7 feet and maximum of 10 feet from the base or floor of the roadway cafe. IIII Has a weighted base and any support structures are not affixed to the outward facing side of barriers, are

- of sufficient size and strength, made of durable materials, and free of defects.
- Easily removable, comprised of fire-grade and wind resistant materials.
- If within 50 feet of any regulatory or warning signs, does not exceed 46 inches in height.

Lighting and Electrical Connections

- Any lighting is outdoor rated, properly secured, and lightweight.
- At least 14 feet above sidewalk, and 18 feet above roadway.
- Not attached to any City property, including street trees.
- Electrical work complies with the applicable requirements set forth in the DOT's rules and the New York City Electrical Code.
- Please check this box if you are submitting additional documents for review. Documents may include technical drawings prepared by a licensed professional.