

**9029 FLATLANDS AVENUE**

**BROOKLYN, NEW YORK**

---

# **Remedial Action Work Plan**

**NYC VCP Number: 15CVCP061K**

**OER E-Designation Project Number: 15EHAZ194K**

**Prepared for:**

Polizzotto Realty

6911 18<sup>th</sup> Avenue, Brooklyn, NY 11204

ap3@polizzotto.com

**Prepared by:**



45-09 Greenpoint Avenue, Queens, New York, 11104

ekarayel@athenica.com

(718) 784-7490

---

**DECEMBER 2014**

# REMEDIAL ACTION WORK PLAN

## TABLE OF CONTENTS

TABLE OF CONTENTS.....	2
FIGURES.....	4
TABLES.....	4
APPENDICES.....	4
CERTIFICATION.....	7
EXECUTIVE SUMMARY.....	8
COMMUNITY PROTECTION STATEMENT.....	13
REMEDIAL ACTION WORK PLAN.....	18
1.0    SITE BACKGROUND.....	18
1.1    Site Location and Current Usage.....	18
1.2    Proposed Redevelopment Plan.....	18
1.3    Description of Surrounding Property.....	19
1.4    Remedial Investigation.....	19
2.0    REMEDIAL ACTION OBJECTIVES.....	22
3.0    REMEDIAL ALTERNATIVES ANALYSIS.....	23
3.1    Threshold Criteria.....	25
3.2    Balancing Criteria.....	25
4.0    REMEDIAL ACTION.....	32
4.1    Summary of Preferred Remedial Action.....	32
4.2    Soil Cleanup Objective and Soil/Fill Management.....	34
4.3    Engineering Controls.....	37
4.4    Institutional Controls.....	39
4.5    Site Management Plan.....	40
4.6    Qualitative Human Health Exposure Assessment.....	40
5.0    REMEDIAL ACTION MANAGEMENT.....	45
5.1    Project Organization and Oversight.....	45
5.2    Site Security.....	45

5.3	Work Hours.....	45
5.4	Construction Health and Safety Plan .....	45
5.5	Community Air Monitoring Plan.....	46
5.6	Agency Approvals .....	48
5.7	Site Preparation.....	48
5.8	Traffic Control .....	52
5.9	Demobilization.....	52
5.10	Reporting and Record Keeping.....	53
5.11	Complaint Management.....	54
5.12	Deviations from the Remedial Action Work Plan .....	54
6.0	REMEDIAL ACTION REPORT.....	55
7.0	SCHEDULE.....	57

## **FIGURES**

- Figure 1: Site Location Map
- Figure 2: Site Boundary Map
- Figure 3: Proposed Site Development
- Figure 4: Proposed Areas of Excavation
- Figure 5: Proposed Post-Excavation End-Point Sampling Locations
- Figure 6: Typical Site-wide Composite Cover System
- Figure 7: Proposed Vapor Barrier Design and Sub-Slab Depressurization System Details
- Figure 8: Proposed Sub-Slab Depressurization System Layout

## **TABLES**

- Table 1: Unrestricted Use Soil Cleanup Objectives

## **APPENDICES**

- Appendix 1: Citizen Participation Plan
- Appendix 2: Sustainability Statement
- Appendix 3: Soil/Materials Management Plan
- Appendix 4: Construction Health and Safety Plan
- Appendix 5: Proposed Development Plans
- Appendix 6: Vapor Barrier and Sub-Slab Depressurization System Specifications

## LIST OF ACRONYMS

<b>Acronym</b>	<b>Definition</b>
AOC	Area of Concern
AS/SVE	Air Sparging/Soil Vapor Extraction
BOA	Brownfield Opportunity Area
CAMP	Community Air Monitoring Plan
C/D	Construction/Demolition
COC	Certificate of Completion
CQAP	Construction Quality Assurance Plan
CSOP	Contractors Site Operation Plan
DCR	Declaration of Covenants and Restrictions
ECs/ICs	Engineering Controls and Institutional Controls
HASP	Health and Safety Plan
IRM	Interim Remedial Measure
VCA	Voluntary Cleanup Agreement
MNA	Monitored Natural Attenuation
NOC	Notice of Completion
NYC VCP	New York City Voluntary Cleanup Program
NYC DEP	New York City Department of Environmental Protection
NYC DOHMH	New York State Department of Health and Mental Hygiene
NYCRR	New York Codes Rules and Regulations
NYC OER	New York City Office of Environmental Remediation
NYS DEC	New York State Department of Environmental Conservation
NYS DEC DER	New York State Department of Environmental Conservation Division of Environmental Remediation
NYS DOH	New York State Department of Health
NYS DOT	New York State Department of Transportation
ORC	Oxygen-Release Compound
OSHA	United States Occupational Health and Safety Administration
PE	Professional Engineer
PID	Photo Ionization Detector
QEP	Qualified Environmental Professional
QHHEA	Qualitative Human Health Exposure Assessment
RAOs	Remedial Action Objectives
RAR	Remedial Action Report
RAWP	Remedial Action Work Plan or Plan
RCA	Recycled Concrete Aggregate
RD	Remedial Design
RI	Remedial Investigation
RMZ	Residual Management Zone

SCOs	Soil Cleanup Objectives
SCG	Standards, Criteria and Guidance
SMP	Site Management Plan
SMMP	Soils/Materials Management Plan
SPDES	State Pollutant Discharge Elimination System
SVOC	Semi-Volatile Organic Compound
USGS	United States Geological Survey
UST	Underground Storage Tank
VOC	Volatile Organic Compound

# CERTIFICATION

I, Reza Sharif, am a Professional Engineer licensed in the State of New York. I have primary direct responsibility for implementation of the remedial action for the 9029 Flatlands Avenue Site, (OER Project No. 15EHAZ194K and NYC VCP Site No. 15CVCP061K).

I, William Silveri, am a Qualified Environmental Professional as defined in §43-140. I have primary direct responsibility for implementation of the remedial action for the 9029 Flatlands Avenue Site, (OER Project No. 15EHAZ194K and NYC VCP Site No. 15CVCP061K).

I certify that this Remedial Action Work Plan (RAWP) has a plan for handling, transport and disposal of soil, fill, fluids and other materials removed from the property in accordance with applicable City, State and Federal laws and regulations. Importation of all soil, fill and other material from off-Site will be in accordance with all applicable City, State and Federal laws and requirements. This RAWP has provisions to control nuisances during the remediation and all invasive work, including dust and odor suppression.

\_\_\_\_\_  
Name

\_\_\_\_\_  
NYS PE License Number

\_\_\_\_\_  
Signature

\_\_\_\_\_  
Date

\_\_\_\_\_  
QEP Name

\_\_\_\_\_  
QEP Signature

\_\_\_\_\_  
Date



# **EXECUTIVE SUMMARY**

Polizzotto Realty has applied to enroll in the New York City Voluntary Cleanup Program (NYC VCP) to investigate and remediate a 16,700-square foot property located at 9029 Flatlands Avenue (aka 1159 East 92<sup>nd</sup> Street) in Canarsie section of Brooklyn, New York 11236 (the “Site”). A remedial investigation (RI) was performed to compile and evaluate data and information necessary to develop this Remedial Action Work Plan (RAWP). The remedial action described in this document provides for the protection of public health and the environment consistent with the intended property use, complies with applicable environmental standards, criteria and guidance and conforms to applicable laws and regulations.

## **Site Location and Current Usage**

The Site is located at 9029 Flatlands Avenue (aka 1159 East 92<sup>nd</sup> Street) in Canarsie section of Brooklyn, New York and is identified as Block 8179 and Lot 1 on the New York City Tax Map. Figure 1 shows the Site location. The Site is approximately 16,700-square feet and contains three 1-story commercial buildings and is bounded by a residential building and an auto repair facility to the north, several commercial properties to the south, several commercial/retail stores to the east, and a residential building to the west. A map of the site boundary is shown in Figure 2. Currently, one of the buildings on-Site is being used as a retail/store front and the other two are vacant.

## **Summary of Proposed Redevelopment Plan**

The proposed redevelopment of the Site will consist of new approximately 15,000-square foot 2-story commercial building with no basement. The existing floor slab, interior walls, and the exterior walls along Flatlands Avenue and East 92<sup>nd</sup> Street will be demolished, and new exterior walls will be constructed on top of the existing foundation along Flatlands Avenue and East 92<sup>nd</sup> Street. The remaining foundation walls will remain in place. The new floor slab will be lowered 6-inches as part of the new construction. The partial basement in the northeast corner of the Site will be backfilled as part of construction. Minor excavation will be required for the installation of new structural footings (to a depth of 3-4 feet below grade) and one elevator pit (to a depth of approximately 5 feet below grade). The proposed future use of the Site will consist of commercial uses. Layout of the proposed site development is presented in Figure 3. The current

zoning designation is R5D/R4-1 with a C2-3 overlay, denoting a residential area with commercial uses. The proposed use is consistent with existing zoning for the property.

### **Summary of Environmental Findings**

1. Elevation of the property ranges is approximately 26 feet above mean sea level.
2. Depth to groundwater is approximately 15 feet below ground surface at the Site.
3. Regional groundwater flow is generally south-southeast beneath the Site.
4. Bedrock was not encountered during this remedial investigation.
5. The stratigraphy of the Site, from the surface down, consists of 2 feet of medium brown sand with some silt and small pebbles underlain by medium brown sand down to 8 feet bgs.
6. Soil samples collected during this Remedial Investigation were compared to 6 NYCRR Part 375-6.8 Unrestricted Use Soil Cleanup Objectives (SCOs) and Restricted Use - Commercial SCOs. Soil/fill samples collected during the RI showed no detections of Volatile Organic Compounds (VOCs) other than trace levels of acetone, which was detected at concentrations well below the Unrestricted Use SCOs. SVOCs, pesticides, and PCBs were not detected in any of the soil samples above their method detection limits. Metals were not detected at concentrations above the Unrestricted Use SCOs, with the exception of selenium. Selenium was detected in three of the five shallow soil samples at maximum concentrations of 5.09 mg/kg, slightly above its Unrestricted Use SCO of 3.9 mg/kg but well below the Restricted Use - Commercial SCO of 1,500 mg/kg. Overall, the findings were consistent with observations for native sand, which is likely to be found in Flatlands area.
7. Groundwater samples collected during the RI were compared to NYSDEC 6NYCRR Part 703.5 Class GA Groundwater Quality Standards (GQS). The groundwater sample collected during the RI indicated no detections of pesticides and PCBs in the groundwater above their method detection limits. There were no detections of VOCs, SVOCs, and metals (both total and dissolved metals) in groundwater above their respective GQS.

8. Soil vapor samples collected during the RI were compared to the compounds listed in Table 3.1 Air Guideline Values Derived by the NYSDOH located in the New York State Department of Health (NYSDOH) Final Guidance for Evaluating Soil Vapor Intrusion dated October 2006. Soil vapor samples collected during the RI showed moderate to high levels of petroleum-related compounds including: n-hexane, o-xylene, p- & m-xylene, toluene, ethyl benzene, and p-ethyltoluene. The petroleum related compounds (BETX) range from 45  $\mu\text{g}/\text{m}^3$  to 4416  $\mu\text{g}/\text{m}^3$ . Chlorinated 1,1,1-trichloroethane (TCA) and carbon tetrachloride were not detected in any of the soil vapor samples. Trichloroethane (TCE) was detected in one of two samples at a maximum concentration of 110  $\mu\text{g}/\text{m}^3$ . Tetrachloroethane (PCE) was detected in both soil vapor samples at a concentration of 140 and 2,100  $\mu\text{g}/\text{m}^3$ . The TCE and PCE concentrations are above the monitoring level ranges established by NYSDOH Final Guidance and will require mitigation.

### **Summary of the Remedy**

The proposed remedial action achieves protection of public health and the environment for the intended use of the property. The proposed remedial action achieves all of the remedial action objectives established for the project and addresses applicable standards, criterion, and guidance; is effective in both the short-term and long-term and reduces mobility, toxicity and volume of contaminants; is cost effective and implementable; and uses standards methods that are well established in the industry.

The proposed remedial action will consist of:

1. Preparation of a Community Protection Statement and implementation of all required NYC VCP Citizen Participation activities accord to an approved Citizen Participation Plan.
2. Performance of a Community Air Monitoring Program for particulates and volatile organic carbon compounds.
3. Establishment of Track 4 Site-Specific Soil Cleanup Objectives (SCOs). This Site already meets Unrestricted Use SCOs except for selenium in shallow soils.
4. Site mobilization involving Site security setup, equipment mobilization, utility mark outs and marking & staking excavation areas.

5. Completion of a Waste Characterization Study prior to excavation activities. Waste characterization soil samples will be collected at a frequency specified by a disposal facility(ies). A Waste Characterization Report documenting sampling procedures, locations, analytical results, and disposal facility(ies) approval letters will be submitted to NYC OER prior to the start of the remedial action.
6. Excavation and removal of soil/fill exceeding the Track 4 Site-Specific SCOs. Excavation for construction of the new building floor slab, the elevator pit, additional footings, and the SSDS piping trench would result in approximately 200 cubic yards of soil to be removed from the Site.
7. Screening of excavated soil/fill during intrusive work for indications of contamination by visual means, odor, and monitoring with a PID.
8. Management of excavated materials including temporarily stockpiling and segregating to prevent co-mingling of contaminated material and non-contaminated materials.
9. Removal or properly abandonment of suspect underground storage tanks (buried in the parking area on East 92<sup>nd</sup> Street between Flatlands Avenue and Conklin Avenue) and closure of petroleum spills (if evidence of a spill is encountered during UST excavation) in compliance with applicable local, State and Federal laws and regulations.
10. Transportation and off-Site disposal of all soil/fill material at permitted facilities in accordance with applicable laws and regulations for handling, transport, and disposal, and this plan. Sampling and analysis of excavated media as required by disposal facilities. Appropriate segregation of excavated media on-Site.
11. Collection and analysis of four end-point samples to determine the performance of the remedy with respect to attainment of Track 4 SCOs.
12. Re-use of materials to be used for backfill of the partial cellar in compliance with this work plan and in accordance with applicable laws and regulations.
13. Performance of all activities required for the remedial action, including permitting requirements and pretreatment requirements, in compliance with applicable laws and regulations.
14. Implementation of storm-water pollution prevention measures in compliance with applicable laws and regulations.

15. Installation and operation of an active sub-slab depressurization system. The SSDS will consist of two loops of 4-inch diameter Schedule 40 PVC perforated piping embedded in a pea gravel-lined trench to provide adequate coverage of the entire building footprint. .
16. Installation of a vapor barrier system (VBS) consisting of Preprufe® 300R, manufactured by W.R. Grace & Co. VBS will be installed beneath the building slab and new footings.
17. Construction and maintenance of an engineered composite cover consisting of 5” concrete building slab to prevent human exposure to residual soil/fill remaining under the Site.
18. Submission of an approved Site Management Plan (SMP) in the RAR for long-term management of residual contamination, including plans for operation, maintenance, monitoring, inspection and certification of Engineering and Institutional Controls and reporting at a specified frequency.
19. Submission of a Remedial Action Report (RAR) that describes the remedial activities, certifies that the remedial requirements have been achieved, defines the Site boundaries, lists any changes from this RAWP, and describes all Engineering and Institutional Controls to be implemented at the Site.
20. The property will continue to be registered with an E-Designation by the NYC Buildings Department. Establishment of Engineering Controls and Institutional Controls in this RAWP and a requirement that management of these controls must be in compliance with an approved SMP. Institutional Controls will include prohibition of the following: (1) vegetable gardening and farming; (2) use of groundwater without treatment rendering it safe for the intended use; (3) disturbance of residual contaminated material unless it is conducted in accordance with the SMP; and (4) higher level of land usage without OER-approval.

## COMMUNITY PROTECTION STATEMENT

The Office of Environmental Remediation created the New York City Voluntary Cleanup Program (NYC VCP) to provide governmental oversight for the cleanup of contaminated property in NYC. This Remedial Action Work Plan (“cleanup plan”) describes the findings of prior environmental studies that show the location of contamination at the site, and describes the plans to clean up the site to protect public health and the environment.

This cleanup plan provides a very high level of protection for neighboring communities and also includes many other elements that address common community concerns, such as community air monitoring, odor, dust and noise controls, hours of operation, good housekeeping and cleanliness, truck management and routing, and opportunities for community participation. The purpose of this Community Protection Statement is to explain these community protection measures in non-technical language to simplify community review.

**Remedial Investigation and Cleanup Plan.** Under the NYC VCP, a thorough cleanup study of this property (called a remedial investigation) has been performed to identify past property usage, to sample and test soils, groundwater and soil vapor, and identify contaminant sources present on the property. The cleanup plan has been designed to address all contaminant sources that have been identified during the study of this property.

**Identification of Sensitive Land Uses.** Prior to selecting a cleanup, the neighborhood was evaluated to identify sensitive land uses nearby, such as schools, day care facilities, hospitals and residential areas. The cleanup program was then tailored to address the special conditions of this community.

**Qualitative Human Health Exposure Assessment.** An important part of the cleanup planning for the Site is the performance of a study to find all of the ways that people might come in contact with contaminants at the Site now or in the future. This study is called a Qualitative Human Health Exposure Assessment (QHHEA). A QHHEA was performed for this project. This assessment has considered all known contamination at the Site and evaluated the potential for people to come in contact with this contamination. All identified public exposures will be addressed under this cleanup plan.

**Construction Health and Safety Plan.** This cleanup plan includes a Construction Health and Safety Plan (CHASP) that is designed to protect community residents and on-Site workers. The elements of this plan are in compliance with safety requirements of the United States Occupational Safety and Health Administration (OSHA). This plan includes many protective elements including those discussed below.

**Site Safety Coordinator.** This project has a designated Site safety coordinator to implement the Health and Safety Plan. The safety coordinator maintains an emergency contact sheet and protocol for management of emergencies. The Site safety coordinator's name and number will be reported to OER once determined prior to the start of construction.

**Worker Training.** Workers participating in cleanup of contaminated material on this project are required to be trained in a 40-hour hazardous waste operators training course and to take annual refresher training. This pertains to workers performing specific tasks including removing contaminated material and installing cleanup systems in contaminated areas.

**Community Air Monitoring Plan.** Community air monitoring will be performed during this cleanup project to ensure that the community is properly protected from contaminants, dust and odors. Air samples will be tested in accordance with a detailed plan called the Community Air Monitoring Plan or CAMP. Results will be regularly reported to the NYC Office of Environmental Remediation. This cleanup plan also has a plan to address any unforeseen problems that might occur during the cleanup (called a 'Contingency Plan').

**Odor, Dust and Noise Control.** This cleanup plan includes actions for odor and dust control. These actions are designed to prevent off-Site odor and dust nuisances and includes steps to be taken if nuisances are detected. Generally, dust is managed by application of physical covers and by water sprays. Odors are controlled by limiting the area of open excavations, physical covers, spray foams and by a series of other actions (called operational measures). The project is also required to comply with NYC noise control standards. If you observe problems in these areas, please contact the on-Site Project Manager (name and number will be reported to OER once determined prior to the start of construction) or NYC Office of Environmental Remediation Project Manager Eric Ilijevich at (212) 341-2034.

**Quality Assurance.** This cleanup plan requires that evidence be provided to illustrate that all cleanup work required under the plan has been completed properly. This evidence will be summarized in the final report, called the Remedial Action Report. This report will be submitted to the NYC Office of Environmental Remediation and will be thoroughly reviewed.

**Storm-Water Management.** To limit the potential for soil erosion and discharge, this cleanup plan has provisions for storm-water management. The main elements of the storm water management include physical barriers such as tarp covers and erosion fencing, and a program for frequent inspection.

**Hours of Operation.** The hours for operation of cleanup will comply with the NYC Department of Buildings construction code requirements or according to specific variances issued by that agency. For this cleanup project, the hours of operation will be reported to OER once determined prior to the start of construction.

**Signage.** While the cleanup is in progress, a placard will be prominently posted at the main entrance of the property with a laminated project Fact Sheet that states that the project is in the NYC Voluntary Cleanup Program, provides project contact names and numbers, and locations of project documents can be viewed.

**Complaint Management.** The contractor performing this cleanup is required to address all complaints. If you have any complaints, you can call the facility Project Manager (name and number will be reported to OER once determined prior to the start of construction), the NYC Office of Environmental Remediation Project Manager Eric Ilijevich at (212) 341-2034, or call 311 and mention the Site is in the NYC Voluntary Cleanup Program.

**Utility Mark-outs.** To promote safety during excavation in this cleanup, the contractor is required to first identify all utilities and must perform all excavation and construction work in compliance with NYC Department of Buildings regulations.

**Soil and Liquid Disposal.** All soil and liquid material removed from the Site as part of the cleanup will be transported and disposed of in accordance with all applicable City, State and Federal regulations and required permits will be obtained.

**Soil Chemical Testing and Screening.** All excavations will be supervised by a trained and properly qualified environmental professional. In addition to extensive sampling and chemical testing of soils on the Site, excavated soil will be screened continuously using hand-held instruments, by sight, and by smell to ensure proper material handling and management, and community protection.

**Stockpile Management.** Soil stockpiles will be kept covered with tarps to prevent dust, odors and erosion. Stockpiles will be frequently inspected. Damaged tarp covers will be promptly replaced. Stockpiles will be protected with silt fences. Hay bales will be used, as needed to protect storm water catch basins and other discharge points.

**Trucks and Covers.** Loaded trucks leaving the Site will be covered in compliance with applicable laws and regulations to prevent dust and odor. Trucks will be properly recorded in logs and records and placarded in compliance with applicable City, State and Federal laws, including those of the New York State Department of Transportation. If loads contain wet material that can leak, truck liners will be used. All transport of materials will be performed by licensed truckers and in compliance with all laws and regulations.

**Imported Material.** All fill materials proposed to be brought onto the Site will comply with rules outlined in this cleanup plan and will be inspected and approved by a qualified worker located on-Site. Waste materials will not be brought onto the Site. Trucks entering the Site with imported clean materials will be covered in compliance with applicable laws and regulations.

**Equipment Decontamination.** All equipment used for cleanup work will be inspected and washed, if needed, before it leaves the Site. Trucks will be cleaned at a truck inspection station on the property before leaving the Site.

**Housekeeping.** Locations where trucks enter or leave the Site will be inspected every day and cleaned regularly to ensure that they are free of dirt and other materials from the Site.

**Truck Routing.** Truck routes have been selected to: (a) limit transport through residential areas and past sensitive nearby properties; (b) maximize use of city-mapped truck routes; (c) limit total distance to major highways; (d) promote safety in entry to highways; (e) promote overall safety in trucking; and (f) minimize off-Site line-ups (queuing) of trucks entering the

property. Operators of loaded trucks leaving the Site will be instructed not to stop or idle in the local neighborhood.

**Final Report.** The results of all cleanup work will be fully documented in a final report (called a Remedial Action Report) that will be available for you to review in the public document repositories located at Brooklyn Public Library – Canarsie Branch (1580 Rockaway Parkway, Brooklyn, New York, 11236).

**Long-Term Site Management.** To provide long-term protection after the cleanup is complete, the property owner will be required to comply with an ongoing Site Management Plan that calls for continued inspection of protective controls, such as Site covers. The Site Management Plan is evaluated and approved by the NYC Office of Environmental Remediation. Requirements that the property owner must comply with are defined in the property's deed or established through a city environmental designation. A certification of continued protectiveness of the cleanup will be required from time to time to show that the approved cleanup is still effective.

# **REMEDIAL ACTION WORK PLAN**

## **1.0 SITE BACKGROUND**

Polizzotto Realty has applied to enroll in the New York City Voluntary Cleanup Program (NYC VCP) to investigate and remediate a 16,700-square foot property located at 9029 Flatlands Avenue (aka 1159 East 92<sup>nd</sup> Street) in Canarsie section of Brooklyn, New York 11236 (the “Site”). A Remedial Investigation (RI) was performed to compile and evaluate data and information necessary to develop this Remedial Action Work Plan (RAWP) in a manner that will render the Site protective of public health and the environment consistent with the contemplated end use. This RAWP establishes remedial action objectives, provides a remedial alternatives analysis that includes consideration of a permanent cleanup, and provides a description of the selected remedial action. The remedial action described in this document provides for the protection of public health and the environment, complies with to applicable environmental standards, criteria and guidance and applicable laws and regulations.

### **1.1 Site Location and Current Usage**

The Site is located at 9029 Flatlands Avenue (aka 1159 East 92<sup>nd</sup> Street) in Canarsie section of Brooklyn, New York and is identified as Block 8179 and Lot 1 on the New York City Tax Map. Figure 1 shows the Site location. The Site is approximately 16,700-square feet and contains three 1-story commercial buildings and is bounded by a residential building and an auto repair facility to the north, several commercial properties to the south, several commercial/retail stores to the east, and a residential building to the west. A map of the site boundary is shown in Figure 2. Currently, one of the buildings on-Site is currently being used as a retail/store front and the other two are vacant.

### **1.2 Proposed Redevelopment Plan**

The proposed redevelopment of the Site will consist of new approximately 15,000-square foot 2-story commercial building with no basement. The existing floor slab, interior walls, and the exterior walls along Flatlands Avenue and East 92<sup>nd</sup> Street will be demolished, and new exterior walls will be constructed on top of the existing foundation along Flatlands Avenue and East 92<sup>nd</sup> Street. The remaining foundation walls will remain in place. The new floor slab will be

lowered 6-inches as part of the new construction. The partial basement in the northeast corner of the Site will be backfilled as part of construction. Minor excavation will be required for the installation of new structural footings (to a depth of 3-4 feet below grade) and one elevator pit (to a depth of approximately 5 feet below grade). The proposed future use of the Site will consist of commercial uses and outdoor parking. Layout of the proposed site development is presented in Figure 3. The current zoning designation is R5D/R4-1 with a C2-3 overlay, denoting a residential area with commercial uses. The proposed use is consistent with existing zoning for the property.

### **1.3 Description of Surrounding Property**

The Site is located with a mixed use residential and commercial area of Brooklyn, New York. The Site is bounded by a residential building and an auto repair facility to the north, several commercial properties to the south, several commercial/retail stores to the east, and a residential building to the west. According to the OER Searchable Property Environmental E-Database (SPEED), there are no sensitive receptors (such as schools, hospitals, and day-care facilities) within a 500-foot radius of the Site.

Figure 2 shows the surrounding land usage.

### **1.4 Remedial Investigation**

Based upon the review of the Phase I Environmental Site Assessment (ESA) report prepared by Athenica in October 2014 (previously submitted to OER), the Site history was established. The Site consists of an approximate 17,000-square foot lot that contains three one-story commercial buildings, two of which are unoccupied. Prior to 1928, the Site was vacant. In 1928, the Site was developed with four adjoining one-story buildings. The present Site configuration of three one-story buildings was developed in 1950.

The AOCs identified for this site include:

1. Presence of trichloroethylene (TCE) and tetrachloroethylene (PCE) in soil vapor underneath the Site.
2. Presence of underground storage tanks (buried in the parking area on East 92<sup>nd</sup> Street between Flatlands Avenue and Conklin Avenue).

## **Summary of the Work Performed under the Remedial Investigation**

1. Conducted a Site inspection to identify AOCs and physical obstructions (i.e. structures, buildings, etc.);
2. Performed a ground-penetration radar (GPR) survey;
3. Installed five (5) soil borings across the entire project Site and collected ten (10) soil samples for chemical analysis to evaluate soil quality;
4. Installed one (1) groundwater monitoring well and collected one (1) groundwater sample for chemical analysis to evaluate groundwater quality;
5. Installed two (2) soil vapor probes throughout the Site and collected two (2) soil vapor samples for chemical analysis.

## **Summary of Environmental Findings**

1. Elevation of the property ranges is approximately 26 feet above mean sea level.
2. Depth to groundwater is approximately 15 feet below ground surface at the Site.
3. Regional groundwater flow is generally south-southeast beneath the Site.
4. Bedrock was not encountered during this remedial investigation.
5. The stratigraphy of the Site, from the surface down, consists of 2 feet of medium brown sand with some silt and small pebbles underlain by medium brown sand down to 8 feet bgs.
6. Soil samples collected during this Remedial Investigation were compared to 6 NYCRR Part 375-6.8 Unrestricted Use Soil Cleanup Objectives (SCOs) and Restricted Use - Commercial SCOs. Soil/fill samples collected during the RI showed no detections of Volatile Organic Compounds (VOCs) other than trace levels of acetone, which was detected at concentrations well below the Unrestricted Use SCOs. SVOCs, pesticides, and PCBs were not detected in any of the soil samples above their method detection limits. Metals were not detected at concentrations above the Unrestricted Use SCOs, with the exception of selenium. Selenium was detected in three of the five shallow soil samples at maximum concentrations of 5.09 mg/kg, slightly above its Unrestricted Use

SCO of 3.9 mg/kg but well below the Restricted Use - Commercial SCO of 1,500 mg/kg. Overall, the findings were consistent with observations for native sand, which is likely to be found in Flatlands area.

7. Groundwater samples collected during the RI were compared to NYSDEC 6NYCRR Part 703.5 Class GA Groundwater Quality Standards (GQS). The groundwater sample collected during the RI indicated no detections of pesticides and PCBs in the groundwater above their method detection limits. There were no detections of VOCs, SVOCs, and metals (both total and dissolved metals) in groundwater above their respective GQS.
8. Soil vapor samples collected during the RI were compared to the compounds listed in Table 3.1 Air Guideline Values Derived by the NYSDOH located in the New York State Department of Health (NYSDOH) Final Guidance for Evaluating Soil Vapor Intrusion dated October 2006. Soil vapor samples collected during the RI showed moderate to high levels of petroleum-related compounds including: n-hexane, o-xylene, p- & m-xylene, toluene, ethyl benzene, and p-ethyltoluene. The petroleum related compounds (BETX) range from 45  $\mu\text{g}/\text{m}^3$  to 4416  $\mu\text{g}/\text{m}^3$ . Chlorinated 1,1,1-trichloroethane (TCA) and carbon tetrachloride were not detected in any of the soil vapor samples. Trichloroethane (TCE) was detected in one of two samples at a maximum concentration of 110  $\mu\text{g}/\text{m}^3$ . Tetrachloroethane (PCE) was detected in both soil vapor samples at a concentration of 140 and 2,100  $\mu\text{g}/\text{m}^3$ . The TCE and PCE concentrations are above the monitoring level ranges established by NYSDOH Final Guidance and will require mitigation.

For more detailed results, consult the RIR. Based on an evaluation of the data and information from the RIR and this RAWP, disposal of significant amounts of hazardous waste is not suspected at this site.

## **2.0 REMEDIAL ACTION OBJECTIVES**

Based on the results of the RI, the following Remedial Action Objectives (RAOs) have been identified for this Site:

### **Groundwater**

- Prevent direct exposure to contaminated groundwater.

### **Soil**

- Prevent direct contact with contaminated soil.
- Prevent exposure to contaminants volatilizing from contaminated soil.

### **Soil Vapor**

- Prevent exposure to contaminants in soil vapor.
- Prevent migration of soil vapor into dwelling and other occupied structures.

### **3.0 REMEDIAL ALTERNATIVES ANALYSIS**

The goal of the remedy selection process below is to select a remedy that is protective of human health and the environment taking into consideration the current, intended and reasonably anticipated future use of the property. The remedy selection process begins by establishing RAOs for media in which chemical constituents were found in exceedance of applicable standards, criteria and guidance values (SCGs). A remedy is then developed based on the following ten criteria:

- Protection of human health and the environment;
- Compliance with SCGs;
- Short-term effectiveness and impacts;
- Long-term effectiveness and permanence;
- Reduction of toxicity, mobility, or volume of contaminated material;
- Implementability;
- Cost effectiveness;
- Community Acceptance;
- Land use; and
- Sustainability

The following is a detailed description of the alternatives analysis and remedy selection to address impacted media at the Site. As required, a minimum of two remedial alternatives are evaluated, as follows:

Alternative 1 involves:

- Selection of NYSDEC 6 NYCRR Part 375 Table 6.8 Unrestricted Use Soil Cleanup Objectives (SCOs) for use as Track 1 SCOs;
- Removal of all soil/fill exceeding Track 1 Unrestricted Use SCOs throughout the Site and confirmation that Track 1 Unrestricted Use SCOs have been achieved with post-excavation endpoint sampling. If soil/fill-containing analytes at concentrations above Track 1 Unrestricted Use SCOs are still present at the base of the excavation, additional excavation will be performed to ensure complete removal of soil that does not meet Track 1 Unrestricted Use SCOs; and

- No Engineering or Institutional Controls are required for a Track 1 cleanup, however a sub slab Depressurization System (SSDS) and a composite cover consisting of concrete slab and a vapor barrier will be installed beneath the new building as a part of development to prevent any potential exposures from off-Site soil vapor.

Alternative 2 involves:

- Establishment of Site-Specific Track 4 SCOs (listed in Section 4.2);
- Removal of soil/fill exceeding Track 4 Site-Specific SCOs and confirmation that Track 4 Site-Specific SCOs have been achieved with post-excavation endpoint sampling. Excavation for the new building's floor slab will take place to a depth of approximately 1 foot below grade. Limited excavation to approximately 2.5 feet will be required for the sub-slab depressurization system (SSDS) piping trench and approximately 3-4 feet below grade for the installation of additional footings. The new elevator pit will also require an excavation of 5 feet bgs.pit.If soil/fill containing analytes at concentrations above site-specific Track 4 Site-Specific SCOs is still present at the base of the excavation, additional excavation will be performed to meet site-specific Track 4 Site-Specific SCOs;
- Placement of a vapor barrier beneath the new building slab to prevent potential exposures from soil vapor;
- Installation and operation of an active sub-slab depressurization system (SSDS);
- Placement of a final cover over the entire building footprint to eliminate exposure to remaining soil;
- Establishment of use restrictions including prohibitions on the use of groundwater from the site and prohibitions on other sensitive site uses, such as farming or vegetable gardening, to eliminate future exposure pathways;
- Establishment of an approved Site Management Plan (SMP) to ensure long-term management of these Engineering and Institutional Controls, including the performance of periodic inspections and certification that the controls are performing as they were intended; and
- Continued registration as an E-Designated property to memorialize the remedial action and the Engineering and Institutional Controls required by this RAWP.

### **3.1 Threshold Criteria**

#### **Protection of Public Health and the Environment**

This criterion is an evaluation of the remedy's ability to protect public health and the environment, and an assessment of how risks posed through each existing or potential pathway of exposure are eliminated, reduced or controlled through removal, treatment, and implementation of Engineering Controls or Institutional Controls. Protection of public health and the environment must be achieved for all approved remedial actions.

Alternative 1 would be protective of human health and environment by removing the soil exceeding Track 1 Unrestricted Use SCOs and groundwater protection standards, thus eliminating potential for direct contact with contaminated soil/fill once construction is complete. Also, the installation of a vapor barrier system and composite cover as part of new construction would provide protection of public health and environment based on on-Site contamination.

Alternative 2 would achieve comparable protection of human health and the environment by excavating and removing soil/fill at the Site and by ensuring that remaining soil/fill on-Site meets Track 4 Site-Specific SCOs, as well as by placement of Institutional and Engineering controls, including a composite cover system, a vapor barrier system, and an active SSDS. The composite cover system would prevent direct contact with any remaining on-Site soil/fill. Vapor barrier system and active SSDS will prevent vapor intrusion. Implementing Institutional Controls including a Site Management Plan (SMP) and continued "E" Designation of property would ensure that the composite cover system remains intact and protective.

For both Alternatives, potential exposure to contaminated soils or groundwater during construction would be minimized by implementing a Construction Health and Safety Plan (CHASP), an approved Soil and Materials Management Plan (SMMP) and Community Air Monitoring Plan (CAMP). Potential contact with contaminated groundwater would be prevented as its use is prohibited by city laws and regulations. Potential future migration of off-Site soil vapors into the new building would be prevented by installing an active SSDS underneath the new building floor slab and a vapor barrier below the new building floor slab.

### **3.2 Balancing Criteria**

#### **Compliance with Standards, Criteria and Guidance (SCGs)**

This evaluation criterion assesses the ability of the alternative to achieve applicable standards, criteria and guidance.

Alternative 1 would achieve compliance with the remedial goals, chemical-specific SCGs and RAOs for soil through removal of soil to achieve Track 1 Unrestricted Use SCOs. Compliance with SCGs for soil vapor would also be achieved by installing a vapor barrier system beneath the new building's basement slab and new footings, as part of new building construction.

Alternative 2 would achieve compliance with the remedial goals, chemical-specific SCGs and RAOs for soil through the removal of soil to meet Track 4 Site-Specific SCOs. Compliance with SCG for soil vapor would be achieved by installing an active SSDS and a vapor barrier beneath the new building's basement slab. A SMP would ensure that these controls remained protective for the long term.

Health and safety measures contained in the CHASP and CAMP that comply with the applicable SCGs shall be implemented during Site redevelopment under this RAWP. For both Alternatives, focused attention on means and methods employed during the remedial action would ensure that handling and management of contaminated material would be in compliance with applicable SCGs. These measures will protect on-site workers and the surrounding community from exposure to Site-related contaminants.

### **Short-term Effectiveness and Impacts**

This evaluation criterion assesses the effects of the alternative during the construction and implementation phase until remedial action objectives are met. Under this criterion, alternatives are evaluated with respect to their effects on public health and the environment during implementation of the remedial action, including protection of the community, environmental impacts, time until remedial response objectives are achieved, and protection of workers during remedial actions.

Both Alternative 1 and 2 have similar short-term effectiveness during their respective implementations, as each requires excavation of soil/fill material. Both alternatives would result in short-term dust generation impacts associated with excavation, handling, load out of materials, and truck traffic. Short term impacts could potentially be higher for Alternative 1 if excavation of

greater amounts of contaminated soil material is encountered below the excavation depth of the proposed building. However, focused attention to means and methods during the remedial action work during a Track 1 removal action, including community air monitoring, health and safety measure and appropriate truck routing, would minimize or negate the overall impact of these activities.

Both Alternatives 1 and 2 would employ appropriate measures to prevent short-term impacts, including a CAMP and a SMMP, during all on-Site soil disturbance activities and would minimize the release of significant contaminants into the environment. Both alternatives provide short term effectiveness in protecting the surrounding community by decreasing the risk of contact with on-Site contaminants. Construction workers operating under appropriate management procedures and a CHASP will be protected from on-Site contaminants (personal protective equipment would be worn consistent with the documented risks within the respective work zones).

### **Long-term Effectiveness and Permanence**

This evaluation criterion addresses the results of a remedial action in terms of its permanence and quantity/nature of waste or residual contamination remaining at the Site after response objectives have been met, such as permanence of the remedial alternative, magnitude of remaining contamination, adequacy of controls including the adequacy and suitability of ECs/ICs that may be used to manage contaminant residuals that remain at the Site and assessment of containment systems and ICs that are designed to eliminate exposures to contaminants, and long-term reliability of ECs.

Alternative 1 would achieve long-term effectiveness and permanence related to on-Site contamination by permanently removing all impacted soils above Track 1 Unrestricted Use SCOs and with the installation of a vapor barrier and composite cover, as part of new construction.

Alternative 2 would provide long-term effectiveness by removing most on-Site contamination and attaining Track 4 Site-Specific SCOs, placing an active SSDS, a vapor barrier, and a composite cover system across the Site, establishing use restrictions, establishing a SMP to ensure long-term management of the ECs/ICs, and continued registration as an E-

Designated property to memorialize these controls for the long term. Groundwater use restrictions will eliminate any potential exposure to groundwater and establishment of an SMP will ensure that this protection remains effective for the long-term. The SMP will ensure long-term effectiveness of all ECs/ICs by requiring periodic inspection and certification that these controls and use restrictions continue to be in place and functioning as they were intended assuring that protections designed into the remedy will provide continued high level of protection in perpetuity.

Both Alternatives would result in removal of soil contamination exceeding their respective SCOs, providing the highest level, most effective and permanent remedy over the long-term with respect to a remedy for contaminated soil, which will eliminate any migration to groundwater. Potential sources of soil vapor and groundwater contamination will also be eliminated as part of the remedy.

### **Reduction of Toxicity, Mobility, or Volume of Contaminated Material**

This evaluation criterion assesses the remedial alternative's use of remedial technologies that permanently and significantly reduce toxicity, mobility, or volume of contaminants as their principal element. The following is the hierarchy of source removal and control measures that are to be used to remediate a Site, ranked from most preferable to least preferable: removal and/or treatment, containment, elimination of exposure and treatment of source at the point of exposure. It is preferred to use treatment or removal to eliminate contaminants at a Site, reduce the total mass of toxic contaminants, cause irreversible reduction in contaminants mobility, or reduce of total volume of contaminated media.

Alternative 1 would permanently eliminate the toxicity, mobility, and volume of contaminants from on-Site soil by removing all soil in excess of Track 1 Unrestricted Use SCOs.

Alternative 2 would permanently eliminate the toxicity, mobility, and volume of contaminants from on-site soil by removing soil in excess of Track 4 Site-Specific SCOs, and remaining soil/fill would meet Track 4 Site-Specific SCOs. Removal of soils to various depths (1 to 5 feet bgs) would occur for entire Site for development purposes.

## **Implementability**

This evaluation criterion addresses the technical and administrative feasibility of implementing an alternative and the availability of various services and materials required during its implementation, including technical feasibility of construction and operation, reliability of the selected technology, ease of undertaking remedial action, monitoring considerations, administrative feasibility (e.g. obtaining permits for remedial activities), and availability of services and materials.

The techniques, materials and equipment to implement both remedial Alternatives 1 and 2 are readily available and have been proven effective in remediating the contaminants associated with the Site. They use standard materials, services, and well-established technology. The reliability of these remedies is also high. There are no specific difficulties associated with any of the activities proposed, which utilize standard industry methods.

## **Cost Effectiveness**

This evaluation criterion addresses the cost of alternatives, including capital costs (such as construction costs, equipment costs, and disposal costs, engineering expenses) and site management costs (costs incurred after remedial construction is complete) necessary to ensure the continued effectiveness of a remedial action.

Since contaminants at the Site were found during the RI only extend to a depth of up to 2 feet below grade surface, and the new building requires excavation of the entire Site to varying depths of 1 to 5 feet, the costs associated with both Alternative 1 and Alternative 2 would likely be comparable. Costs associated with Alternative 1 could potentially be higher than Alternative 2 if soil with analytes above Unrestricted Use SCOs is encountered below the excavation depth required for development. Additional costs associated with the Track 1 cleanup are higher than the Track 4 alternative due to a higher volume of soil/fill to be excavated for off-Site disposal to achieve a Track 1 status over the entire site. However, long-term costs for site management are eliminated for Alternative 1 and may be required for Alternative 2. In both cases, appropriate public health and environmental protections are achieved.

## **Community Acceptance**

This evaluation criterion addresses community opinion and support for the remedial action. Observations here will be supplemented by public comment received on the RAWP.

Based on the overall goals of the remedial program and initial observations by the project team, both of the alternatives are expected to be acceptable to the community. This RAWP will be undergo public review under the NYC VCP and will provide the opportunity for detailed public input on the remedial alternatives and the selected remedial action. This public comment related to site remediation will be considered by OER prior to approval of this plan. The Citizen Participation Plan for the project is provided in Appendix 1. Observations here will be supplemented by public comment received on the RAWP.

## **Land Use**

This evaluation criterion addresses the proposed use of the property. This evaluation has considered reasonably anticipated future uses of the Site and takes into account: current use and historical and/or recent development patterns; applicable zoning laws and maps; NYS Department of State's Brownfield Opportunity Areas (BOA) pursuant to section 970-r of the general municipal law; applicable land use plans; proximity to real property currently used for residential use, and to commercial, industrial, agricultural, and/or recreational areas; environmental justice impacts, Federal or State land use designations; population growth patterns and projections; accessibility to existing infrastructure; proximity of the site to important cultural resources and natural resources, potential vulnerability of groundwater to contamination that might emanate from the site, proximity to flood plains, geography and geology; and current Institutional Controls applicable to the site.

Both Alternatives for remedial action at the site are comparable with respect to the proposed use and to land uses in the vicinity of the Site. The proposed use is consistent with the existing zoning designation for the property and is consistent with recent development patterns. The Site is surrounded by commercial and residential properties and both alternatives provide comprehensive protection of public health and the environment for these uses. Improvements in the current environmental condition of the property achieved by both alternatives are also consistent with the City's goals for cleanup of contaminated land and bringing such properties

into productive reuse. Both alternatives are equally protective of natural resources and cultural resources.

### **Sustainability of the Remedial Action**

This criterion evaluates the overall sustainability of the remedial action alternatives and the degree to which sustainable means are employed to implement the remedial action including those that take into consideration NYC's sustainability goals defined in *PlaNYC: A Greener, Greater New York*. Sustainability goals may include: maximizing the recycling and reuse of non-virgin materials; reducing the consumption of virgin and non-renewable resources; minimizing energy consumption and greenhouse gas emissions; improving energy efficiency; and promotion of the use of native vegetation and enhancing biodiversity during landscaping associated with Site development.

Alternative 1 would use the most energy and produce the most greenhouse gasses, as it would have the largest volume of material to truck off site. While Alternative 2 would result in lower energy use based on reducing the volume of material transported off-site, both remedial alternatives are comparable with respect to the opportunity to achieve sustainable remedial action. The remedial plan would take into consideration the shortest trucking routes during off-Site disposal of historic fill and other soils, which would reduce greenhouse gas emissions and conserve energy used to fuel trucks. New York City Clean Soil Bank program may be utilized for reuse of native soils. To the extent practicable, energy efficient building materials, appliances, and equipment will be utilized to complete the development. A complete list of green remedial activities considered as part of the NYC VCP is included in the Sustainability Statement, included as Appendix 2.

## **4.0 REMEDIAL ACTION**

### **4.1 Summary of Preferred Remedial Action**

The preferred remedial action alternative is Alternative 2, the Track 4 Alternative. The preferred remedial action alternative achieves protection of public health and the environment for the intended use of the property. The preferred remedial action alternative will achieve all of the remedial action objectives established for the project and addresses applicable SCGs. The preferred remedial action alternative is effective in both the short-term and long-term and reduces mobility, toxicity and volume of contaminants. The preferred remedial action alternative is cost effective and implementable and uses standards methods that are well established in the industry.

The proposed remedial action will consist of:

1. Preparation of a Community Protection Statement and implementation of all required NYC VCP Citizen Participation activities accord to an approved Citizen Participation Plan.
2. Performance of a Community Air Monitoring Program for particulates and volatile organic carbon compounds.
3. Establishment of Track 4 Site-Specific Soil Cleanup Objectives (SCOs). This Site already meets Unrestricted Use SCOs except for selenium in shallow soils.
4. Site mobilization involving Site security setup, equipment mobilization, utility mark outs and marking & staking excavation areas.
5. Completion of a Waste Characterization Study prior to excavation activities. Waste characterization soil samples will be collected at a frequency specified by a disposal facility(ies). A Waste Characterization Report documenting sampling procedures, locations, analytical results, and disposal facility(ies) approval letters will be submitted to NYC OER prior to the start of the remedial action.
6. Excavation and removal of soil/fill exceeding the Track 4 Site-Specific SCOs. Excavation for construction of the new building floor slab, the elevator pit, additional footings, and the SSDS piping trench would result in approximately 200 cubic yards of soil to be removed from the Site.

7. Screening of excavated soil/fill during intrusive work for indications of contamination by visual means, odor, and monitoring with a PID.
8. Management of excavated materials including temporarily stockpiling and segregating to prevent co-mingling of contaminated material and non-contaminated materials.
9. Removal or properly abandonment of suspect underground storage tanks (buried in the parking area on East 92<sup>nd</sup> Street between Flatlands Avenue and Conklin Avenue) and closure of petroleum spills (if evidence of a spill is encountered during UST excavation) in compliance with applicable local, State and Federal laws and regulations.
10. Transportation and off-Site disposal of all soil/fill material at permitted facilities in accordance with applicable laws and regulations for handling, transport, and disposal, and this plan. Sampling and analysis of excavated media as required by disposal facilities. Appropriate segregation of excavated media on-Site.
11. Collection and analysis of four end-point samples to determine the performance of the remedy with respect to attainment of Track 4 SCOs.
12. Re-use of materials to be used for backfill of the partial cellar in compliance with this work plan and in accordance with applicable laws and regulations.
13. Performance of all activities required for the remedial action, including permitting requirements and pretreatment requirements, in compliance with applicable laws and regulations.
14. Implementation of storm-water pollution prevention measures in compliance with applicable laws and regulations.
15. Installation and operation of an active sub-slab depressurization system. The SSDS will consist of two loops of 4-inch diameter Schedule 40 PVC perforated piping embedded in a pea gravel-lined trench to provide adequate coverage of the entire building footprint. .
16. Installation of a vapor barrier system (VBS) consisting of Preprufe® 300R, manufactured by W.R. Grace & Co. VBS will be installed beneath the building slab and new footings.
17. Construction and maintenance of an engineered composite cover consisting of 5” concrete building slab to prevent human exposure to residual soil/fill remaining under the Site.
18. Submission of an approved Site Management Plan (SMP) in the RAR for long-term management of residual contamination, including plans for operation, maintenance,

monitoring, inspection and certification of Engineering and Institutional Controls and reporting at a specified frequency.

19. Submission of a Remedial Action Report (RAR) that describes the remedial activities, certifies that the remedial requirements have been achieved, defines the Site boundaries, lists any changes from this RAWP, and describes all Engineering and Institutional Controls to be implemented at the Site.
20. The property will continue to be registered with an E-Designation by the NYC Buildings Department. Establishment of Engineering Controls and Institutional Controls in this RAWP and a requirement that management of these controls must be in compliance with an approved SMP. Institutional Controls will include prohibition of the following: (1) vegetable gardening and farming; (2) use of groundwater without treatment rendering it safe for the intended use; (3) disturbance of residual contaminated material unless it is conducted in accordance with the SMP; and (4) higher level of land usage without OER-approval.

#### **4.2 Soil Cleanup Objective and Soil/Fill Management**

This Site already meets Unrestricted Use SCOs for all compounds other than naturally occurring selenium. Track 4 Site-Specific SCOs are proposed for this project. The SCOs for this Site are included in the 6 NYCRR Part 703.5 Table 6.8 (b) (Restricted Commercial) as amended for compounds below:

<b>Contaminant</b>	<b>Track 4 Site-Specific SCOs</b>
Selenium	10 mg/kg

Soil and materials management on-Site and off-Site, including excavation, handling and disposal, will be conducted in accordance with the Soil/Materials Management Plan in Appendix 3. The location of planned excavations is shown in Figure 4.

Discrete contaminant sources (such as hotspots) identified during the remedial action will be identified by GPS or surveyed. This information will be provided in the Remedial Action Report.

## **Estimated Soil/Fill Removal Quantities**

The total quantity of soil/fill expected to be excavated is approximately 300 tons, with approximately 120 tons re-used on Site and the remaining material disposed off-Site. Disposal facilities will be reported to OER when they are identified and prior to the start of remedial action.

## **End-Point Sampling**

Removal actions for development purposes under this plan will be performed in conjunction with confirmation soil sampling. Four (4) confirmation samples will be collected from the base of the excavation at locations to be determined by OER. The location of the end-point samples is shown in Figure 5. The Remedial Investigation provided end-point data that met Track 1 – Unrestricted Use SCOs for soils deeper than the proposed varying depths of excavation. However, additional post-excavation end-point sampling and testing will be performed promptly following completion of excavation. For comparison to Track 1 SCOs, analytes will include VOCs, SVOC, pesticides, PCBs and metals according to analytical methods described below. For comparison to Track 4 SCOs, analytes will only include trigger compounds and elements established on the Track 4 SCO list.

Hot-spot removal actions, whether established under this RAWP or identified during the remedial program, will be performed in conjunction with post remedial end-point samples to ensure that hot-spots are fully removed. Analytes for end-point sampling will be those parameters that are driving the hot-spot removal action and will be approved by OER. Frequency for hot-spot end-point sample collection is as follows:

1. For excavations less than 20 feet in total perimeter, at least one bottom sample and one sidewall sample biased in the direction of surface runoff.
2. For excavations 20 to 300 feet in perimeter:
  - For surface removals, one sample from the top of each sidewall for every 30 linear feet of sidewall and one sample from the excavation bottom for every 900 square feet of bottom area.

- For subsurface removals, one sample from each sidewall for every 30 linear feet of sidewall and one sample from the excavation bottom for every 900 square feet of bottom area.
3. For sampling of volatile organics, bottom samples should be taken within 24 hours of excavation, and should be taken from the zero to six-inch interval at the excavation floor. Samples taken after 24 hours should be taken at six to twelve inches.
  4. For contaminated soil removal, post remediation soil samples for laboratory analysis should be taken immediately after contaminated soil removal. If the excavation is enlarged horizontally, additional soil samples will be taken pursuant to bullets 1-3 above.

Post-remediation end-point sample locations and depth will be biased towards the areas and depths of highest contamination identified during previous sampling episodes unless field indicators such as field instrument measurements or visual contamination identified during the remedial action indicate that other locations and depths may be more heavily contaminated. In all cases, post-remediation samples should be biased toward locations and depths of the highest expected contamination.

New York State ELAP certified labs will be used for all confirmation and end-point sample analyses. Labs performing confirmation and end-point sample analyses will be reported in the RAR. The RAR will provide a tabular and map summary of all confirmation and end-point sample results and will include all data including non-detects and applicable standards and/or guidance values. End-point samples will be Confirmation samples will be analyzed for compounds and elements as described above utilizing the following methodology:

Soil analytical methods will include:

- Target Analyte List metals

If either LNAPL and/or DNAPL are detected, appropriate samples will be collected for characterization and “finger print analysis” and required regulatory reporting (i.e. spills hotline) will be performed.

### **Quality Assurance/Quality Control**

The fundamental QA objective with respect to accuracy, precision, and sensitivity of analysis for laboratory analytical data is to achieve the QC acceptance of the analytical protocol. The

accuracy, precision and completeness requirements will be addressed by the laboratory for all data generated.

Quality assurance (duplicate and trip blanks) and quality control (field blanks) samples will be incorporated into the sampling events, and will consist of duplicate soil and field blank for every 20 end-point soil samples and every groundwater sampling event. In addition, a trip blank will be included in every groundwater sampling event. Soil and ground field blanks will be analyzed for SVOCs, pesticides, and metals. The trip blank will be analyzed for only VOCs.

### **Import and Reuse of Soils**

Reuse of soils already on-Site will be performed in conformance with the Soil/Materials Management Plan in Appendix 3. The estimated quantity of onsite soil/fill expected to be reused/relocated on Site is 120 tons.

### **4.3 Engineering Controls**

Engineering Controls were employed in the remedial action to address residual contamination remaining at the site. The Site has three (3) primary Engineering Control Systems. These are:

- Composite cover system consisting of 5” concrete building floor slab;
- Vapor barrier system; and
- An active sub-slab depressurization system.

#### **Composite Cover System**

Exposure to residual soil/fill will be prevented by an engineered, composite cover system to be built on the Site. This composite cover system is comprised of:

- 5” concrete building floor slab; and

Figure 6 shows the typical design for each remedial cover type used on this Site. Figure 7 shows the location of each cover type built at the Site.

The composite cover system is a permanent engineering control for the Site. The system will be inspected and reported at specified intervals as required by this RAWP and the SMP. A Soil Management Plan will be included in the Site Management Plan and will outline the procedures

to be followed in the event that the composite cover system and underlying residual soil/fill is disturbed after the remedial action is complete. Maintenance of this composite cover system will be described in the Site Management Plan in the RAR.

### **Vapor Barrier**

Migration of soil vapor will be mitigated with a combination of concrete building slab and vapor barrier. In order to prevent subsurface vapors from impacting the interior air of the buildings, a vapor barrier system (VBS) consisting of Preprufe® 300R will be installed beneath the building slab and new footings. Preprufe® 300R is manufactured by W.R. Grace & Co. Penetrations will be grouted if the penetration is not stable, and the membrane will be fitted tight to the penetration. If the membrane is not within 12 mm of the penetration, Preprufe® tape (a self-adhesive 200 mm wide strip) will be used to cover the gap. Bituthene® Liquid Membrane will be applied around the penetrations using a fillet to provide a water tight seal between the Preprufe® membrane and Preprufe® tape. If seams are encountered, Preprufe® tape will be applied. Vertical and horizontal overlaps will be 3 inches. Where applicable, overlap of horizontal and vertical membranes at corners will be 4 inches. Mechanical fastening of overlaps will be in accordance with the manufacturer installation diagram and specifications. The installation of the VBS will be described in the RAR. The Remedial Action Report will include photographs of the installation process, PE/RA certified letter (on company letterhead) from primary contractor responsible for installation oversight and field inspections, and a copy of the manufacturers certificate of warranty.

The project's Professional Engineer licensed by the State of New York will have primary direct responsibility for overseeing the implementation of the vapor barrier. Figure 7 shows the details of the vapor barrier system. Details including the specifications are provided in Appendix 6. The compatibility letter will be provided in the Stip List.

### **Sub-Slab Depressurization System**

Migration of off-Site soil vapor will be mitigated with the construction of an active sub-slab depressurization system (SSDS). The SSDS will prevent soil gas from accumulating in the building by creating a negative pressure zone beneath the building floor slab. To create this negative pressure zone, the SSDS will be installed under the new building floor slab of the entire

building. The SSDS will consist of two loops of piping to provide adequate coverage of the entire building footprint. Each loop consists of 4-inch diameter Schedule 40 PVC perforated piping embedded in a pea gravel-lined trench. For each loop, the piping will connect to an exhaust riser that leads to the roof of the building. A minimum of 12-inches of pea gravel will be placed around the pipe. An electric fan will be installed on the exhaust pipe to maintain negative pressure beneath the building foundation. The visible exhaust pipe should be labeled and the labels made visible to future occupants. Previous Figure 8 shows the details of the proposed SSDS.

#### **4.4 Institutional Controls**

Institutional Controls (IC) have been incorporated in this remedial action to manage residual soil/fill and other media and render the Site protective of public health and the environment. ICs are listed below. Long-term employment of EC/ICs will be implemented under a site-specific Site Management Plan (SMP) that will be included in the RAR. The property will continue to be registered with an E-Designation by the NYC Buildings Department.

Institutional Controls proposed for this remedial action are as follows:

- The property will continue to be registered with an E-Designation at the NYC Buildings Department. This RAWP includes a description of all ECs and ICs and summarizes the requirements of the Site Management Plan which will note that the property owner and property owner's successors and assigns must comply with the approved SMP;
- Submittal of a Site Management Plan (SMP) in the RAR for approval by OER that provides procedures for appropriate operation, maintenance, inspection, reporting and certification of ECs. SMP will require that the property owner and property owner's successors and assigns will submit to OER a periodic written statement that certifies that: (1) controls employed at the Site are unchanged from the previous certification or that any changes to the controls were approved by OER; and, (2) nothing has occurred that impairs the ability of the controls to protect public health and environment or that constitute a violation or failure to comply with the SMP. OER retains the right to enter the Site in order to evaluate the continued maintenance of any controls. This certification shall be submitted at a frequency to be determined by OER in the SMP and will comply with RCNY §43-1407(1)(3).

- Vegetable gardens and farming on the Site are prohibited in contact with residual soil materials;
- Use of groundwater underlying the Site is prohibited without treatment rendering it safe for its intended use;
- All future activities on the Site that will disturb residual material must be conducted pursuant to the soil management provisions in an approved SMP;
- The Site will be used for commercial use and will not be used for a higher level of use without prior approval by OER.

#### **4.5 Site Management Plan**

Site Management is the last phase of remediation and begins with the approval of the Remedial Action Report and issuance of the Notice of Completion (NOC) for the Remedial Action. The Site Management Plan (SMP) describes appropriate methods and procedures to ensure implementation of all ECs and ICs that are required by this RAWP. The Site Management Plan is submitted as part of the RAR but will be written in a manner that allows its use as an independent document. Site Management continues until terminated in writing by OER. The property owner is responsible to ensure that all Site Management responsibilities defined in the Site Management Plan are implemented.

The SMP will provide a detailed description of the procedures required to manage residual soil/fill left in place following completion of the remedial action in accordance with the Voluntary Cleanup Agreement with OER. This includes a plan for: (1) implementation of EC's and ICs; (2) implementation of monitoring programs; (3) operation and maintenance of EC's; (4) inspection and certification of EC's; and (5) reporting.

Site management activities, reporting, and EC/IC certification will be scheduled by OER on a periodic basis to be established in the SMP and will be subject to review and modification by OER. The Site Management Plan will be based on a calendar year and certification reports will be due for submission to OER by July 31 of the year following the reporting period.

#### **4.6 Qualitative Human Health Exposure Assessment**

The objective of the qualitative exposure assessment is to identify potential receptors and pathways for human exposure to the contaminants of concern (COC) that are present at, or

migrating from, the Site. The identification of exposure pathways describes the route that the COC takes to travel from the source to the receptor. An identified pathway indicates that the potential for exposure exists; it does not imply that exposures actually occur.

Investigations reported in the Remedial Investigation Report (RIR) are sufficient to complete a Qualitative Human Health Exposure Assessment (QHHEA). As part of the VCP process, a QHHEA was performed to determine whether the Site poses an existing or future health hazard to the Site's exposed or potentially exposed population. The sampling data from the RI were evaluated to determine whether there is any health risk by characterizing the exposure setting, identifying exposure pathways, and evaluating contaminant fate and transport. This QHHEA was prepared in accordance with Appendix 3B and Section 3.3 (b) 8 of the NYSDEC Draft DER-10 Technical Guidance for Site Investigation and Remediation.

### **Known and Potential Sources**

Urban fill is present at the Site from grade to approximately 4 feet below grade. Based on the results of the RIR, the contaminants of concern are as follows:

#### **Soil:**

- Metals including selenium exceeding Unrestricted Use SCOs in shallow soil.

#### **Soil Vapor:**

- Chlorinated solvents including trichloroethylene and tetrachloroethylene above the mitigation level range established by NYSDOH Final Guidance on Soil Vapor Intrusion.

### **Nature, Extent, Fate and Transport of Contaminants**

Pesticides and PCBs were not detected in any of the soil samples. VOCs and SVOCs were detected in soil samples at concentrations well below the Unrestricted Use SCOs. Metals were not detected in soil samples at concentrations above the Unrestricted Use SCOs, with the exception of selenium which was detected at concentrations above the Unrestricted Use SCOs but below the Restricted Use Commercial SCOs. Pesticides and PCBs were not detected in the groundwater sample. Trace concentrations of VOCs, SVOCs, and metals (both total and filtered) were detected in the groundwater sample below the GQS. Chlorinated solvents

(trichloroethylene and tetrachloroethylene) were both detected in the soil vapor samples at elevated levels and are thought to originate from an off-Site source. This Site already meets Unrestricted Use SCOs for soil except for selenium.

### **Potential Routes of Exposure**

The five elements of an exposure pathway are: (1) a contaminant source; (2) contaminant release and transport mechanisms; (3) a point of exposure; (4) a route of exposure; and (5) a receptor population. An exposure pathway is considered complete when all five elements of an exposure pathway are documented. A potential exposure pathway exists when any one or more of the five elements comprising an exposure pathway cannot be documented. An exposure pathway may be eliminated from further evaluation when any one of the five elements comprising an exposure pathway has not existed in the past, does not exist in the present, and will never exist in the future. Three potential primary routes exist by which chemicals can enter the body:

- Ingestion of water, fill, or soil;
- Inhalation of vapors and particulates; and
- Dermal contact with water, fill, soil, or building materials.

### **Existence of Human Health Exposure**

*Current Conditions:* The potential for to urban fill does not exist under the current conditions because of the existing floor slab. The Site is served by the public water supply and groundwater use for potable supply is prohibited. Groundwater is not used at the Site; therefore there is no potential for groundwater exposure. The only concern is the potential for exposure to soil vapor.

*Construction/Remediation Activities:* During remedial action, construction workers will be exposed to site constituents including metals in soils as a result of on-Site construction and excavation activities. The proposed Site development includes the removal of existing floor slab and material to a depth of approximately 1 foot below grade (to lower the proposed floor slab by approximately 6”) across the site, excavation for an elevator pit and several structural footings, and trenching for the sub-slab depressurization system piping. On-Site construction workers potentially could ingest, inhale or have dermal contact with any exposed impacted soil, and fill.

Similarly, off-Site receptors could be exposed to dust and vapors from on-Site activities. During construction, on-Site and off-Site exposures to contaminated dust from on-Site will be addressed through the Soil/Materials Management Plan, dust controls, and through the implementation of the Community Air Monitoring Program and a Construction Health and Safety Plan.

*Proposed Future Conditions:* Under future remediated conditions, all soils in excess of Track 4 Site-Specific SCOs will be removed. The Site will be fully capped, limiting potential direct exposure to soil and groundwater remaining in place, and an active SSDS and vapor barrier system will prevent any exposure to potential off-Site soil vapors in the future. The Site is served by a public water supply, and groundwater is not used at the Site for potable supply. There are no plausible off-Site pathways for ingestion, inhalation, or dermal exposure to contaminants derived from the Site under future conditions.

### **Receptor Populations**

*On-Site Receptors:* Current on-Site receptors are limited to employees, site representatives and visitors granted access to the property. During construction, on-Site receptors will include construction worker, site representatives, and visitors. After construction, on-Site receptors will include child and adult residents and visitors.

*Off-Site Receptors:* Potential off-site receptors within a 0.25-mile radius of the Site include: adult and child residents; commercial and construction workers; pedestrians; trespassers, and cyclists, based on the following:

1. Commercial Businesses (up to 0.25 miles) – existing and future
2. Residential Buildings (up to 0.25 miles) –existing and future
3. Building Construction/Renovation (up to 0.25 miles) – existing and future
4. Pedestrians, Trespassers, Cyclists (up to 0.25 miles) – existing and future
5. Schools (up to 0.25 mile) – existing and future

### **Overall Human Health Exposure Assessment**

There are potential complete exposure pathways (i.e., source, route to exposure, receptor population) for soil vapor for the current condition. There is a potential complete, exposure pathway that requires mitigation during implementation of the remedy. There is no complete exposure pathway under future conditions after the Site is developed. Based upon this analysis,

complete on-Site exposure pathways appear to be present only during the construction/remediation phase. During remedial construction, on-Site and off-Site exposures to contaminated dust from historic fill material will be addressed through dust controls, and through the implementation of the Community Air Monitoring Program, the Soil/Materials Management Plan, and a Construction Health and Safety Plan. After the remedial action is complete, there will be no remaining exposure pathways to on-Site soil/fill, as all soil above Track 4 Site Specific SCOs will have been removed and a vapor barrier and an active SSDS will have been installed as part of development. The vapor barrier system and an active SSDS will prevent potential vapor intrusion. The composite cover system and use restrictions will prevent contact with residual soil or groundwater and continued protection after the remedial action will be achieved by the implementation of site management including periodic inspection and certification of the performance of remedial controls. Potential post-construction use of groundwater is not considered an option because groundwater in this area of New York City is not used as a potable water source.

## **5.0 REMEDIAL ACTION MANAGEMENT**

### **5.1 Project Organization and Oversight**

Principal personnel who will participate in the remedial action include Ezgi Karayel (Project Manager) and William Silveri (Sr. Project Manager). The Professional Engineer (PE) and Qualified Environmental Professionals (QEP) for this project are Reza Sharif and William Silveri, PG, CHMM, respectively.

For the vapor barrier system installation, Reza Sharif, PE will provide oversight. For the other components of the RAWP, William Silveri, the QEP, will provide oversight.

### **5.2 Site Security**

Site access will be controlled by DOB approved construction fence. For work areas of limited size, barrier tape will be sufficient to delineate and restrict access.

### **5.3 Work Hours**

The hours for operation of remedial construction will be determined prior to construction and will conform to the New York City Department of Buildings construction code requirements.

### **5.4 Construction Health and Safety Plan**

The Construction Health and Safety Plan is included in Appendix 5. The Site Safety Coordinator will be determined prior to construction. Remedial work performed under this RAWP will be in full compliance with applicable health and safety laws and regulations, including Site and OSHA worker safety requirements and HAZWOPER requirements. Confined space entry, if any, will comply with OSHA requirements and industry standards and will address potential risks. The parties performing the remedial construction work will ensure that performance of work is in compliance with the HASP and applicable laws and regulations. The HASP pertains to remedial and invasive work performed at the Site until the issuance of the Notice of Completion.

All field personnel involved in remedial activities will participate in training required under 29 CFR 1910.120, including 40-hour hazardous waste operator training and annual 8-hour refresher training. Site Safety Officer will be responsible for maintaining workers training records.

Personnel entering any exclusion zone will be trained in the provisions of the HASP and be required to sign an HASP acknowledgment. Site-specific training will be provided to field personnel. Additional safety training may be added depending on the tasks performed. Emergency telephone numbers will be posted at the site location before any remedial work begins. A safety meeting will be conducted before each shift begins. Topics to be discussed include task hazards and protective measures (physical, chemical, environmental); emergency procedures; PPE levels and other relevant safety topics. Meetings will be documented in a log book or specific form.

An emergency contact sheet with names and phone numbers is included in the HASP. That document will define the specific project contacts for use in case of emergency.

## **5.5 Community Air Monitoring Plan**

Real-time air monitoring for volatile organic compounds (VOCs) and particulate levels at the perimeter of the exclusion zone or work area will be performed. Continuous monitoring will be performed for all ground intrusive activities and during the handling of contaminated or potentially contaminated media. Ground intrusive activities include, but are not limited to, soil/waste excavation and handling, test pit excavation or trenching, and the installation of soil borings or monitoring wells.

Periodic monitoring for VOCs will be performed during non-intrusive activities such as the collection of soil and sediment samples or the collection of groundwater samples from existing monitoring wells. Periodic monitoring during sample collection, for instance, will consist of taking a reading upon arrival at a sample location, monitoring while opening a well cap or overturning soil, monitoring during well baling/purging, and taking a reading prior to leaving a sample location. Depending upon the proximity of potentially exposed individuals, continuous monitoring may be performed during sampling activities. Examples of such situations include groundwater sampling at wells on the curb of a busy urban street, in the midst of a public park, or adjacent to a school or residence. Exceedances of action levels observed during performance of the Community Air Monitoring Plan (CAMP) will be reported to the OER Project Manager and included in the Daily Report.

## **VOC Monitoring, Response Levels, and Actions**

Volatile organic compounds (VOCs) will be monitored at the downwind perimeter of the immediate work area (i.e., the exclusion zone) on a continuous basis during invasive work. Upwind concentrations will be measured at the start of each workday and periodically thereafter to establish background conditions. The monitoring work will be performed using equipment appropriate to measure the types of contaminants known or suspected to be present. The equipment will be calibrated at least daily for the contaminant(s) of concern or for an appropriate surrogate. The equipment will be capable of calculating 15-minute running average concentrations, which will be compared to the levels specified below.

- If the ambient air concentration of total organic vapors at the downwind perimeter of the work area or exclusion zone exceeds 5 parts per million (ppm) above background for the 15-minute average, work activities will be temporarily halted and monitoring continued. If the total organic vapor level readily decreases (per instantaneous readings) below 5 ppm over background, work activities will resume with continued monitoring.
- If total organic vapor levels at the downwind perimeter of the work area or exclusion zone persist at levels in excess of 5 ppm over background but less than 25 ppm, work activities will be halted, the source of vapors identified, corrective actions taken to abate emissions, and monitoring continued. After these steps, work activities will resume provided that the total organic vapor level 200 feet downwind of the exclusion zone or half the distance to the nearest potential receptor or residential/commercial structure, whichever is less - but in no case less than 20 feet, is below 5 ppm over background for the 15-minute average.
- If the organic vapor level is above 25 ppm at the perimeter of the work area, activities will be shutdown.

All 15-minute readings must be recorded and be available for OER personnel to review. Instantaneous readings, if any, used for decision purposes will also be recorded.

## **Particulate Monitoring, Response Levels, and Actions**

Particulate concentrations will be monitored continuously at the upwind and downwind perimeters of the exclusion zone at temporary particulate monitoring stations. The particulate

monitoring will be performed using real-time monitoring equipment capable of measuring particulate matter less than 10 micrometers in size (PM-10) and capable of integrating over a period of 15 minutes (or less) for comparison to the airborne particulate action level. The equipment will be equipped with an audible alarm to indicate exceedance of the action level. In addition, fugitive dust migration should be visually assessed during all work activities.

- If the downwind PM-10 particulate level is 100 micrograms per cubic meter (mcg/m<sup>3</sup>) greater than background (upwind perimeter) for the 15-minute period or if airborne dust is observed leaving the work area, then dust suppression techniques will be employed. Work will continue with dust suppression techniques provided that downwind PM-10 particulate levels do not exceed 150 mcg/m<sup>3</sup> above the upwind level and provided that no visible dust is migrating from the work area.
- If, after implementation of dust suppression techniques, downwind PM-10 particulate levels are greater than 150 mcg/m<sup>3</sup> above the upwind level, work will be stopped and a re-evaluation of activities initiated. Work will resume provided that dust suppression measures and other controls are successful in reducing the downwind PM-10 particulate concentration to within 150 mcg/m<sup>3</sup> of the upwind level and in preventing visible dust migration.

All readings will be recorded and be available for OER personnel to review.

## **5.6 Agency Approvals**

All permits or government approvals required for remedial construction have been or will be obtained prior to the start of remedial construction. Approval of this RAWP by OER does not constitute satisfaction of these requirements and will not be a substitute for any required permit.

## **5.7 Site Preparation**

### **Pre-Construction Meeting**

OER will be invited to attend the pre-construction meeting at the Site with all parties involved in the remedial process prior to the start of remedial construction activities.

## **Mobilization**

Mobilization will be conducted as necessary for each phase of work at the Site. Mobilization includes field personnel orientation, equipment mobilization (including securing all sampling equipment needed for the field investigation), marking/staking sampling locations and utility mark-outs. Each field team member will attend an orientation meeting to become familiar with the general operation of the Site, health and safety requirements, and field procedures.

## **Utility Marker Layouts, Easement Layouts**

The presence of utilities and easements on the Site will be fully investigated prior to the performance of invasive work such as excavation or drilling under this plan by using, at a minimum, the One-Call System (811). Underground utilities may pose an electrocution, explosion, or other hazard during excavation or drilling activities. All invasive activities will be performed in compliance with applicable laws and regulations to assure safety. Utility companies and other responsible authorities will be contacted to locate and mark the locations, and a copy of the Markout Ticket will be retained by the contractor prior to the start of drilling, excavation or other invasive subsurface operations. Overhead utilities may also be present within the anticipated work zones. Electrical hazards associated with drilling in the vicinity of overhead utilities will be prevented by maintaining a safe distance between overhead power lines and drill rig masts.

Proper safety and protective measures pertaining to utilities and easements, and compliance with all laws and regulations will be employed during invasive and other work contemplated under this RAWP. The integrity and safety of on-Site and off-Site structures will be maintained during all invasive, excavation or other remedial activity performed under the RAWP.

## **Equipment and Material Staging**

Equipment and materials will be stored and staged in a manner that complies with applicable laws and regulations.

## **Stabilized Construction Entrance**

Steps will be taken to ensure that trucks departing the site will not track soil, fill or debris off-Site. Such actions may include use of cleaned asphalt or concrete roads or use of stone or

other aggregate-based egress paths between the truck inspection station and the property exit. Measures will be taken to ensure that adjacent roadways will be kept clean of project related soils, fill and debris.

### **Truck Inspection Station**

An outbound-truck inspection station will be set up close to the Site exit. Before exiting the NYC VCP Site, trucks will be required to stop at the truck inspection station and will be examined for evidence of contaminated soil on the undercarriage, body, and wheels. Soil and debris will be removed. Brooms, shovels and potable water will be utilized for the removal of soil from vehicles and equipment, as necessary.

### **Extreme Storm Preparedness and Response Contingency Plan**

Damage from flooding or storm surge can include dislocation of soil and stockpiled materials, dislocation of site structures and construction materials and equipment, and dislocation of support of excavation structures. Damage from wind during an extreme storm event can create unsafe or unstable structures, damage safety structures and cause downed power lines creating dangerous site conditions and loss of power. In the event of emergency conditions caused by an extreme storm event, the enrollee will undertake the following steps for site preparedness prior to the event and response after the event.

### **Storm Preparedness**

Preparations in advance of an extreme storm event will include the following: containerized hazardous materials and fuels will be removed from the property; loose materials will be secured to prevent dislocation and blowing by wind or water; heavy equipment such as excavators and generators will be removed from holes, trenches and depressions on the property to high ground or removed from the property; an inventory of the property with photographs will be performed to establish conditions for the site and equipment prior to the event; stockpile covers for soil and fill will be secured by adding weights such as sandbags for added security and worn or ripped stockpile covers will be replaced with competent covers; stockpiled hazardous wastes will be removed from the property; stormwater management systems will be inspected and fortified, including, as necessary: clean and reposition silt fences, haybales; clean storm sewer filters and traps; and secure and protect pumps and hosing.

## **Storm Response**

At the conclusion of an extreme storm event, as soon as it is safe to access the property, a complete inspection of the property will be performed. A site inspection report will be submitted to OER at the completion of site inspection and after the site security is assessed. Site conditions will be compared to the inventory of site conditions and material performed prior to the storm event and significant differences will be noted. Damage from storm conditions that result in acute public safety threats, such as downed power lines or imminent collapse of buildings, structures or equipment will be reported to public safety authorities via appropriate means such as calling 911. Petroleum spills will be reported to NYS DEC within 2 hours of identification and consistent with State regulations. Emergency and spill conditions will also be reported to OER. Public safety structures, such as construction security fences will be repaired promptly to eliminate public safety threats. Debris will be collected and removed. Dewatering will be performed in compliance with existing laws and regulations and consistent with emergency notifications, if any, from proper authorities. Eroded areas of soil including unsafe slopes will be stabilized and fortified. Dislocated materials will be collected and appropriately managed. Support of excavation structure will be inspected and fortified as necessary. Impacted stockpiles will be contained and damaged stockpile covers will be replaced. Storm-water control systems and structures will be inspected and maintained as necessary. If soil or fill materials are discharged off site to adjacent properties, property owners and OER will be notified and corrective measure plan designed to remove and clean dislocated material will be submitted to OER and implemented following approval by OER and granting of site access by the property owner. Impacted off-Site areas may require characterization based on site conditions, at the discretion of OER. If on-Site petroleum spills are identified, a qualified environmental professional will determine the nature and extent of the spill and report to NYS DEC's spill hotline at DEC 800-457-7362. If the source of the spill is ongoing and can be identified, it should be stopped if this can be done safely. Potential hazards will be addressed immediately, consistent with guidance issued by NYS DEC.

## **Storm Response Reporting**

A site inspection report will be submitted to OER at the completion of site inspection. An inspection report established by OER is available on OER's website ([www.nyc.gov/oer](http://www.nyc.gov/oer)) and will

be used for this purpose. Site conditions will be compared to the inventory of site conditions and material performed prior to the storm event and significant differences will be noted. The site inspection report will be sent to the OER project manager and will include the site name, address, tax block and lot, site primary and alternate contact name and phone number. Damage and soil release assessment will include: whether the project had stockpiles; whether stockpiles were damaged; photographs of damage and notice of plan for repair; report of whether soil from the site was dislocated and whether any of the soil left the site; estimates of the volume of soil that left the site, nature of impact, and photographs; description of erosion damage; description of equipment damage; description of damage to the remedial program or the construction program, such as damage to the support of excavation; presence of on-Site or off-Site exposure pathways caused by the storm; presence of petroleum or other spills and status of spill reporting to NYS DEC; description of corrective actions; schedule for corrective actions. This report should be completed and submitted to OER project manager with photographs within 24 hours of the time of safe entry to the property after the storm event.

## **5.8 Traffic Control**

Drivers of trucks leaving the NYC VCP Site with soil/fill will be instructed to proceed without stopping in the vicinity of the site to prevent neighborhood impacts. The planned route on local roads for trucks leaving the site are Flatlands Avenue to Flatbush Avenue.

## **5.9 Demobilization**

Demobilization will include:

- As necessary, restoration of temporary access areas and areas that may have been disturbed to accommodate support areas (e.g., staging areas, decontamination areas, storage areas, temporary water management areas, and access area);
- Removal of sediment from erosion control measures and truck wash and disposal of materials in accordance with applicable laws and regulations;
- Equipment decontamination, and;
- General refuse disposal.

Equipment will be decontaminated and demobilized at the completion of all field activities. Investigation equipment and large equipment (e.g., soil excavators) will be washed at the truck

inspection station as necessary. In addition, all investigation and remediation derived waste will be appropriately disposed.

## **5.10 Reporting and Record Keeping**

### **Daily Reports**

Daily reports providing a general summary of activities for each day of active remedial work will be emailed to the OER Project Manager by the end of the following day. Those reports will include:

- Project number and statement of the activities and an update of progress made and locations of work performed;
- Quantities of material imported and exported from the Site;
- Status of on-Site soil/fill stockpiles;
- A summary of all citizen complaints, with relevant details (basis of complaint; actions taken; etc.);
- A summary of CAMP excursions, if any;
- Photograph of notable Site conditions and activities.

The frequency of the reporting period may be revised in consultation with OER project manager based on planned project tasks. Daily email reports are not intended to be the primary mode of communication for notification to OER of emergencies (accidents, spills), requests for changes to the RAWP or other sensitive or time critical information. However, such information will be included in the daily reports. Emergency conditions and changes to the RAWP will be communicated directly to the OER project manager by personal communication. Daily reports will be included as an Appendix in the Remedial Action Report.

### **Record Keeping and Photo-Documentation**

Job-site record keeping for all remedial work will be performed. These records will be maintained on-Site during the project and will be available for inspection by OER staff. Representative photographs will be taken of the Site prior to any remedial activities and during major remedial activities to illustrate remedial program elements and contaminant source areas.

Photographs will be submitted at the completion of the project in the RAR in digital format (i.e. jpeg files).

### **5.11 Complaint Management**

All complaints from citizens will be promptly reported to OER. Complaints will be addressed and outcomes will also be reported to OER in daily reports. Notices to OER will include the nature of the complaint, the party providing the complaint, and the actions taken to resolve any problems.

### **5.12 Deviations from the Remedial Action Work Plan**

All changes to the RAWP will be reported to the OER Project Manager and will be documented in daily reports and reported in the Remedial Action Report. The process to be followed if there are any deviations from the RAWP will include a request for approval for the change from OER noting the following:

- Reasons for deviating from the approved RAWP;
- Effect of the deviations on overall remedy; and
- Determination that the remedial action with the deviation(s) is protective of public health and the environment.

## **6.0 REMEDIAL ACTION REPORT**

A Remedial Action Report (RAR) will be submitted to OER following implementation of the remedial action defined in this RAWP. The RAR will document that the remedial work required under this RAWP has been completed and has been performed in compliance with this plan. The RAR will include:

- Information required by this RAWP.
- As-built drawings for all constructed remedial elements, required certifications, manifests and other written and photographic documentation of remedial work performed under this remedy.
- Site Management Plan (if Track 1 is not achieved).
- Description of any changes in the remedial action from the elements provided in this RAWP and associated design documents.
- Tabular summary of all end point sampling results and all material characterization results, QA/QC results for end-point sampling, and other sampling and chemical analysis performed as part of the remedial action.
- Test results or other evidence demonstrating that remedial systems are functioning properly.
- Account of the source area locations and characteristics of all contaminated material removed from the Site including a map showing source areas.
- Account of the disposal destination of all contaminated material removed from the Site. Documentation associated with disposal of all material will include transportation and disposal records, and letters approving receipt of the material.
- Account of the origin and required chemical quality testing for material imported onto the Site.
- Continue registration of the property with an E-Designation by the NYC Department of Buildings.
- Reports and supporting material will be submitted in digital form.

## **Remedial Action Report Certification**

The following certification will appear in front of the Executive Summary of the Remedial Action Report. The certification will include the following statements:

*I, Reza Sharif, am currently a professional engineer licensed by the State of New York. I had primary direct responsibility for implementation of the remedial program for the 9029 Flatlands Avenue Site, (OER Project No. 15EHAZ194K and NYC VCP Site No. TBD).*

*I, William Silveri, am a qualified Environmental Professional. I had primary direct responsibility for implementation remedial program for the 9029 Flatlands Avenue Site, (OER Project No. 15EHAZ194K and NYC VCP Site No. TBD).*


*I certify that the OER-approved Remedial Action Work Plan dated xx/xx/xxxx and Stipulations in a letter dated xx/xx/xxxx were implemented and that all requirements in those documents have been substantively complied with. I certify that contaminated soil, fill, liquids or other material from the property were taken to facilities licensed to accept this material in full compliance with applicable laws and regulations.*

## 7.0 SCHEDULE

The table below presents a schedule for the proposed remedial action and reporting. If the schedule for remediation and development activities changes, it will be updated and submitted to OER. Currently, a 4 month remediation period is anticipated.

<b>Schedule Milestone</b>	<b>Weeks from Remedial Action Start</b>	<b>Duration (Weeks)</b>
OER Approval of RAWP	0	-
Fact Sheet 2 announcing start of remedy	2	-
Mobilization	4	2 days
Remedial Excavation	5	2
Demobilization	7	2 days
Submit Remedial Action Report	14	4



# FIGURES

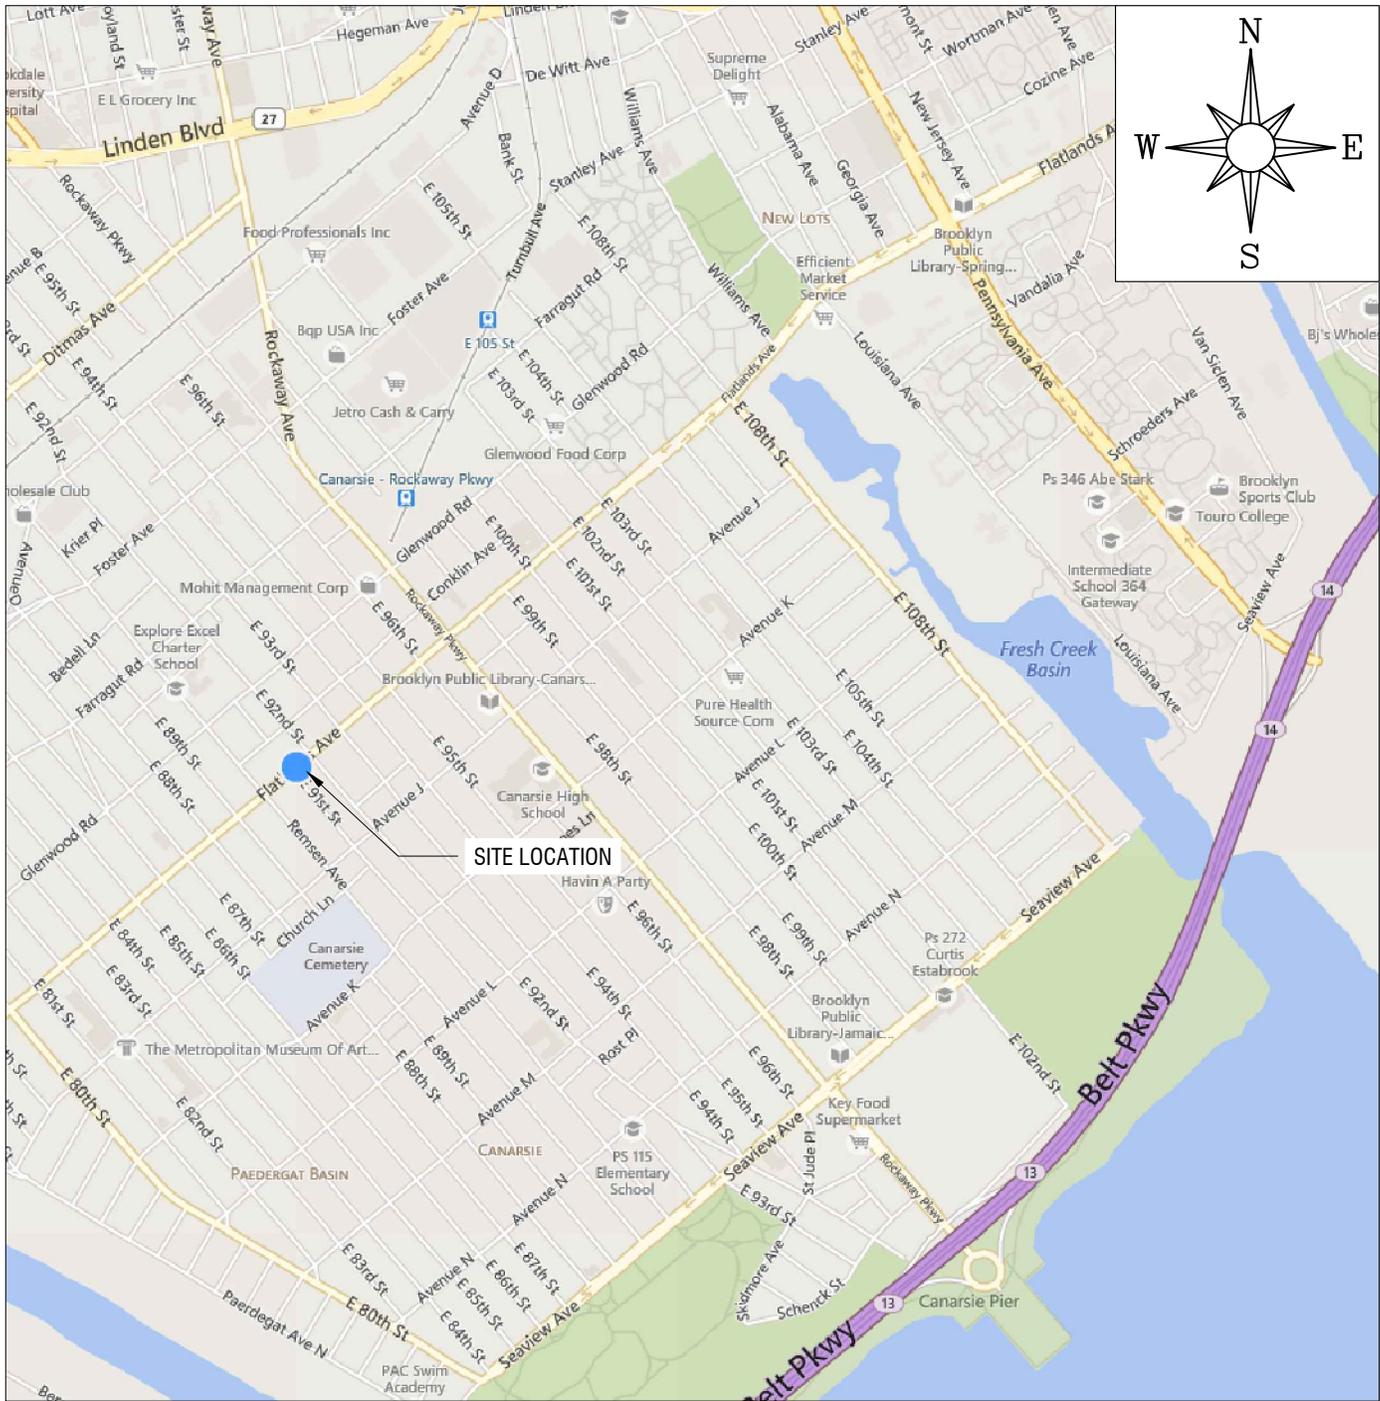

Scale: 1000 ft



Drawn by: ALEJANDRO MOREJON	Site Plan: 9029 FLATLANDS AVENUE BROOKLYN, NY 11236
Checked by: EZGI KARAYEL	
Drawing Scale: AS NOTED	
Project No: 14-131-1168	Figure: 1 Title: REMEDIAL INVESTIGATION REPORT SITE LOCATION MAP
Date: NOVEMBER 11, 2014	

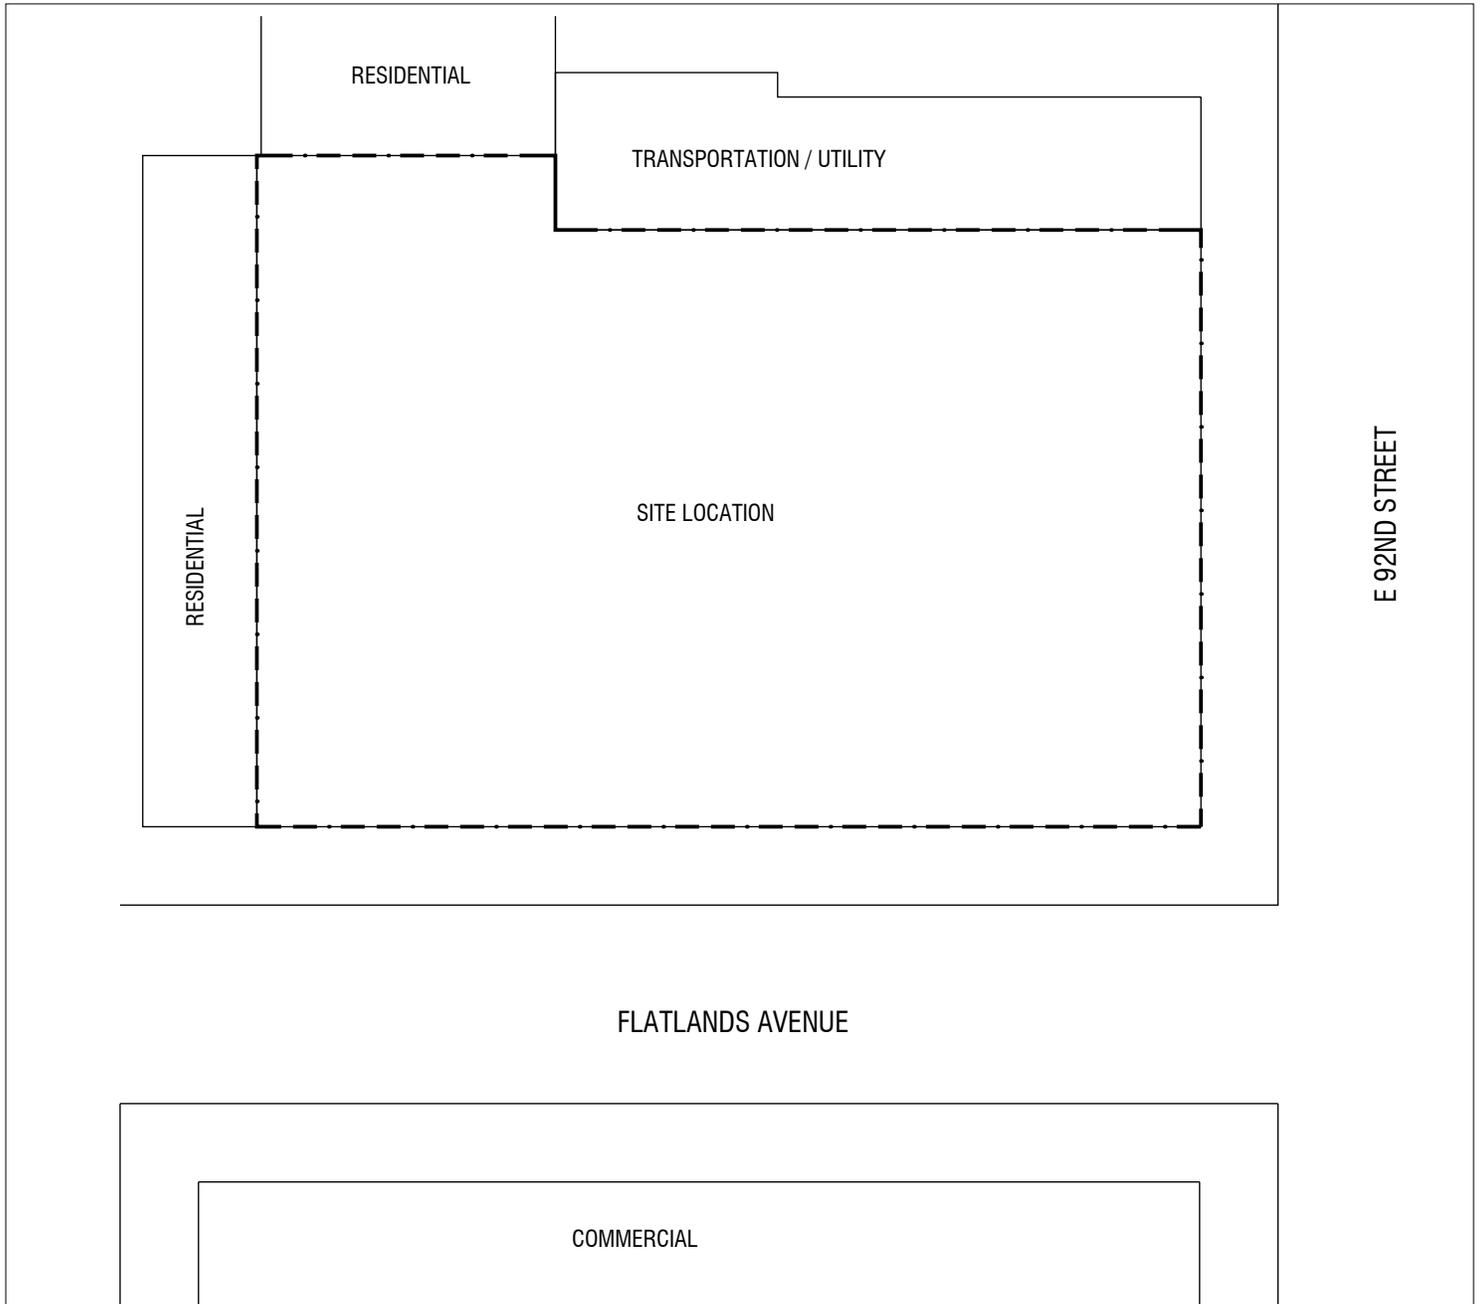

**Legend:**




PROPERTY BOUNDARY



**ATHENICA  
ENVIRONMENTAL  
SERVICES, INC.**  
Environmental Consultants

Site map:	9029 FLATLANDS AVENUE BROOKLYN, NY 11236
Figure: Title:	2 REMEDIAL INVESTIGATION REPORT SITE BOUNDARY MAP
Date:	NOVEMBER 11, 2014
Drawn by:	ALEJANDRO MOREJON CORTINA
Checked by:	EZGI KARAYEL
Drawing Scale:	$\frac{1}{32}'' = 1'-0''$
Project No.:	14-131-1168



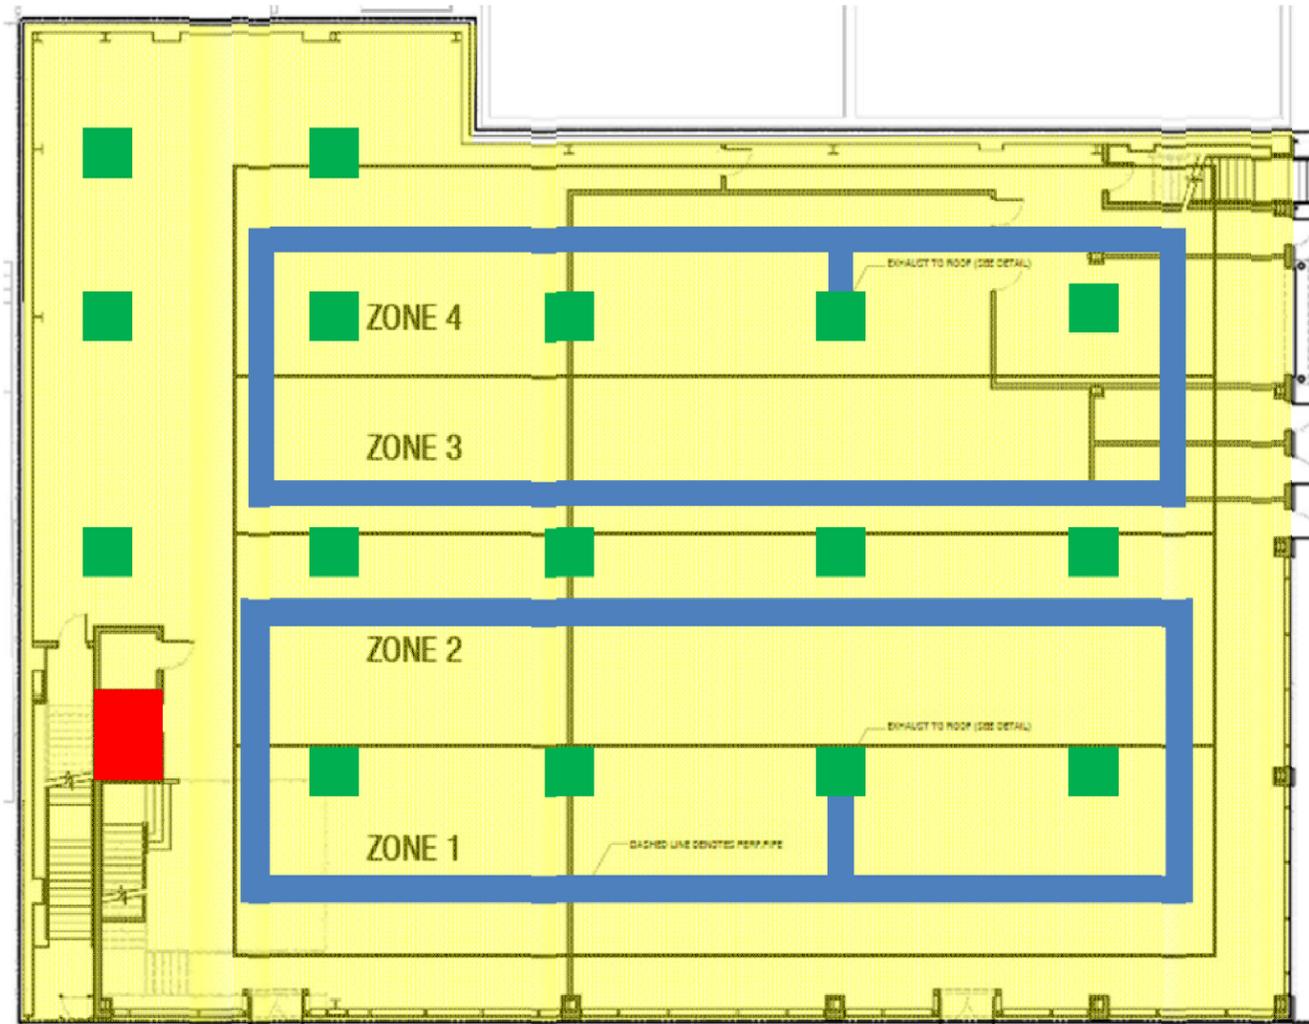

E 92nd Street


- Excavation depth – 3-4 ft bgs for structural footings
- Excavation depth – 5 ft bgs for elevator pit
- Excavation depth – 2 ft bgs for SSDS piping trench
- Excavation depth – 1 ft bgs

Scale: NTS




Date: DECEMBER 17, 2014  
 Drawn by: DIANA SECLIN  
 Checked by: EZGI KARAYEL  
 Drawing Scale: NOT TO SCALE  
 Project No.: 14-133-1276

Site map: 9029 FLATLANDS AVE  
 BROOKLYN, NEW YORK 11236  
 Figure: 4  
 Title: PROPOSED EXCAVATION MAP



E 92nd Street

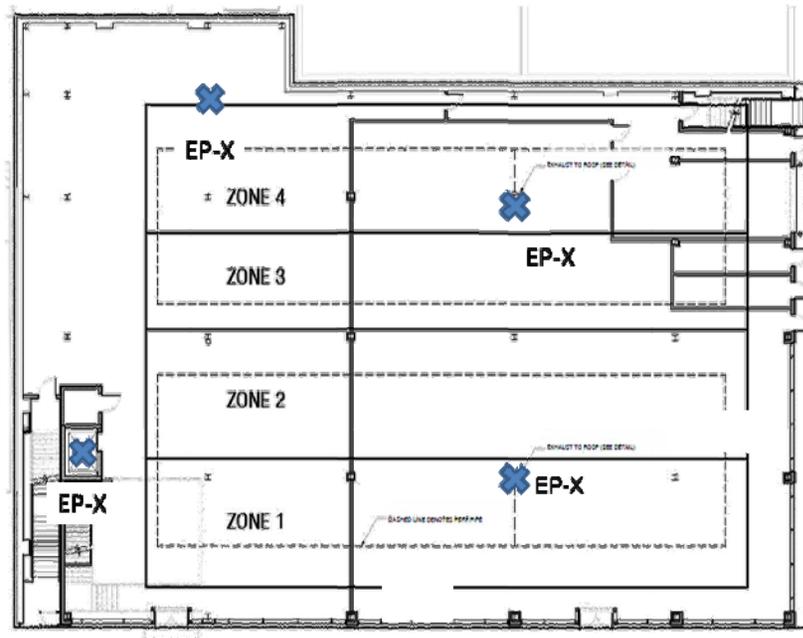

**Legend:**

 Proposed Endpoint Sample Location

Scale: NTS



Date: DECEMBER 17, 2014

Drawn by: MICHAEL MANDAC


Checked by: EZGI KARAYEL

Drawing Scale: NOT TO SCALE


Project No.: 14-133-1276

Site map: 9029 FLATLANDS AVE  
BROOKLYN, NEW YORK 11236

Figure: 5  
Title: PROPOSED ENDPOINT SAMPLE PLAN

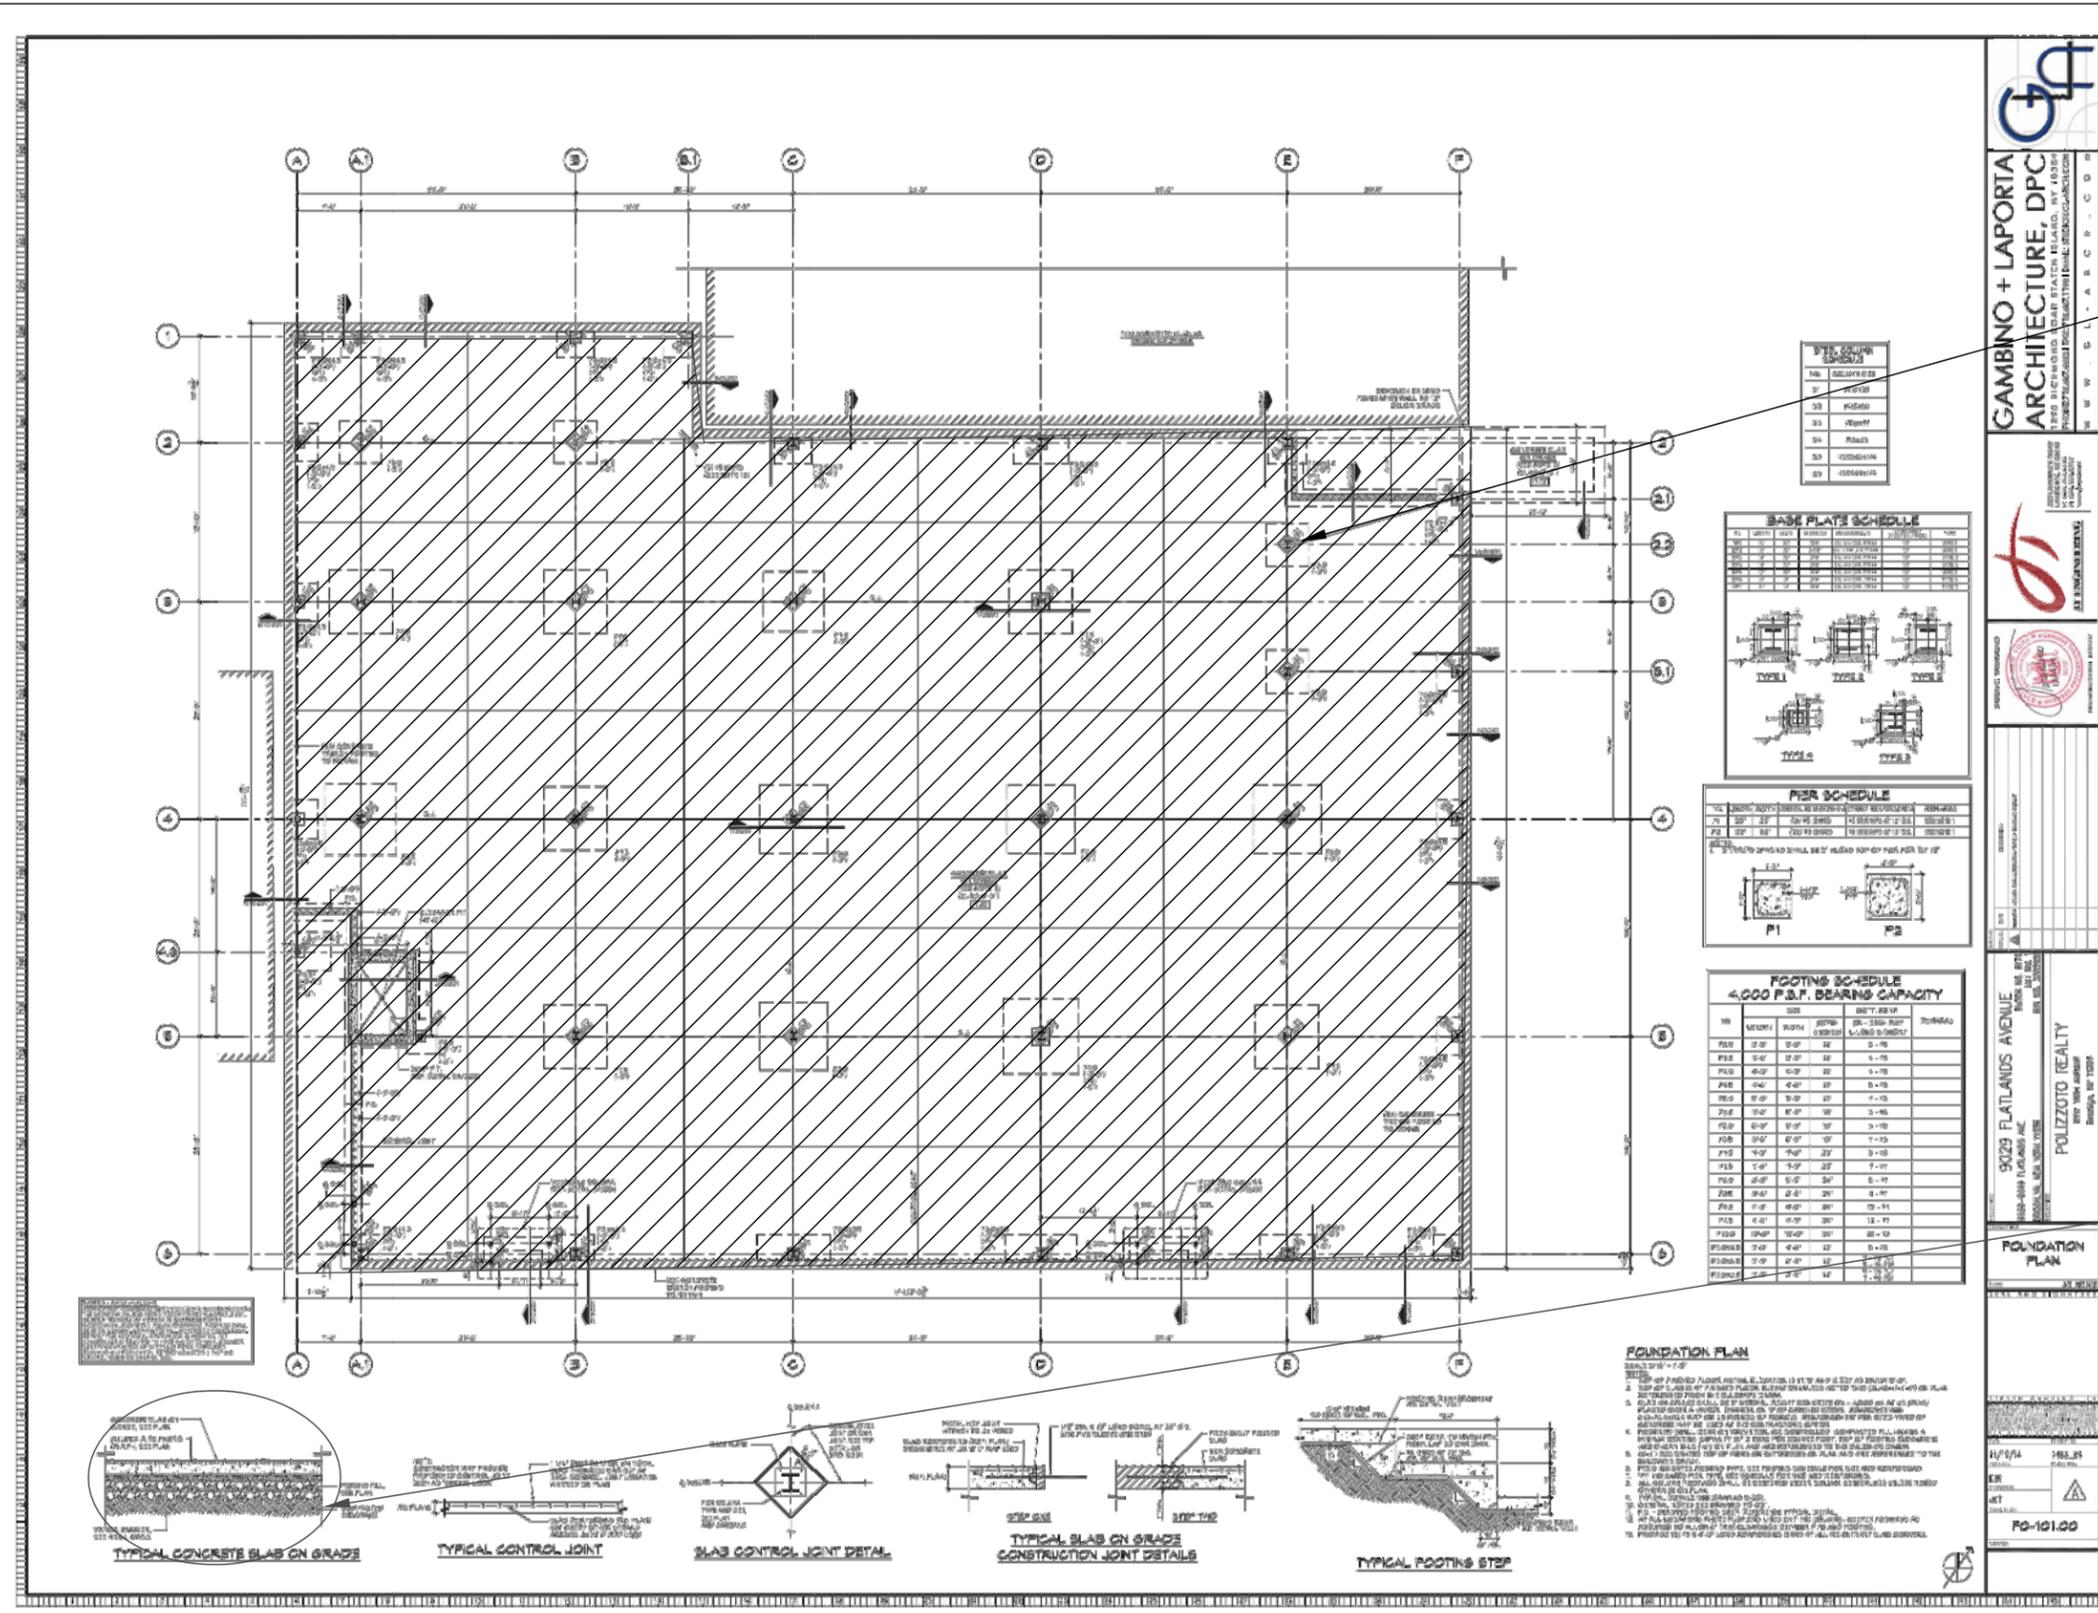

5-inch CONCRETE BUILDING SLAB

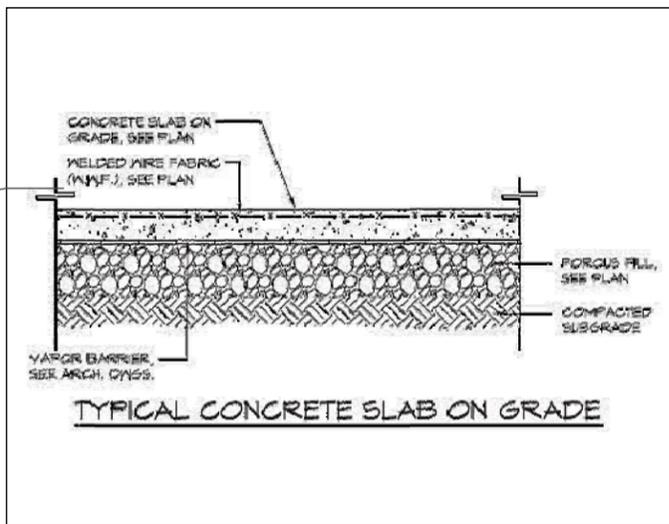


Scale: NTS



Date: DECEMBER 23, 2014  
 Drawn by: EZGI KARAYEL  
 Checked by: MICHAEL MANDAC  
 Drawing Scale: NOT TO SCALE  
 Project No.: 14-133-1276


Site map: 9029 FLATLANDS AVE  
 BROOKLYN, NEW YORK 11236

Figure: 6  
 Title: COMPOSITE COVER SYSTEM LAYOUT AND DETAIL

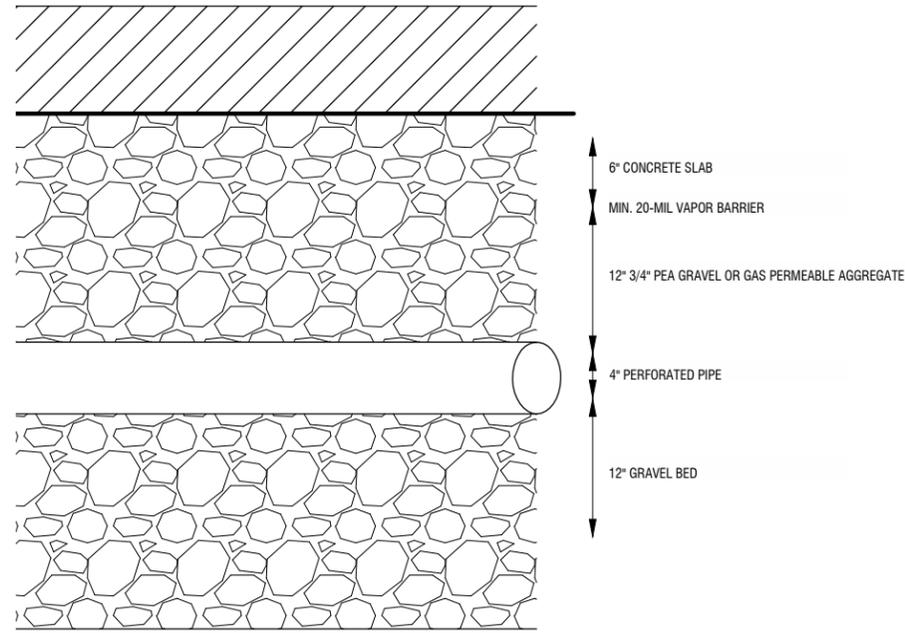


TYP FLOOR, VBS & SSDS CROSS SECTION DETAIL

3/4"=1'

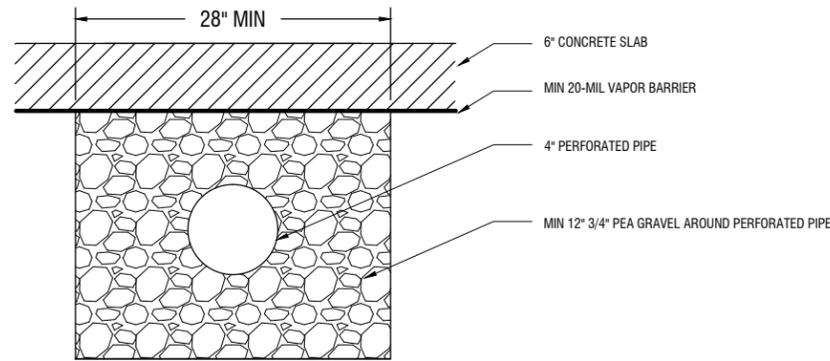

TYP SSDS PIPE CROSS SECTION DETAIL

3/4"=1'

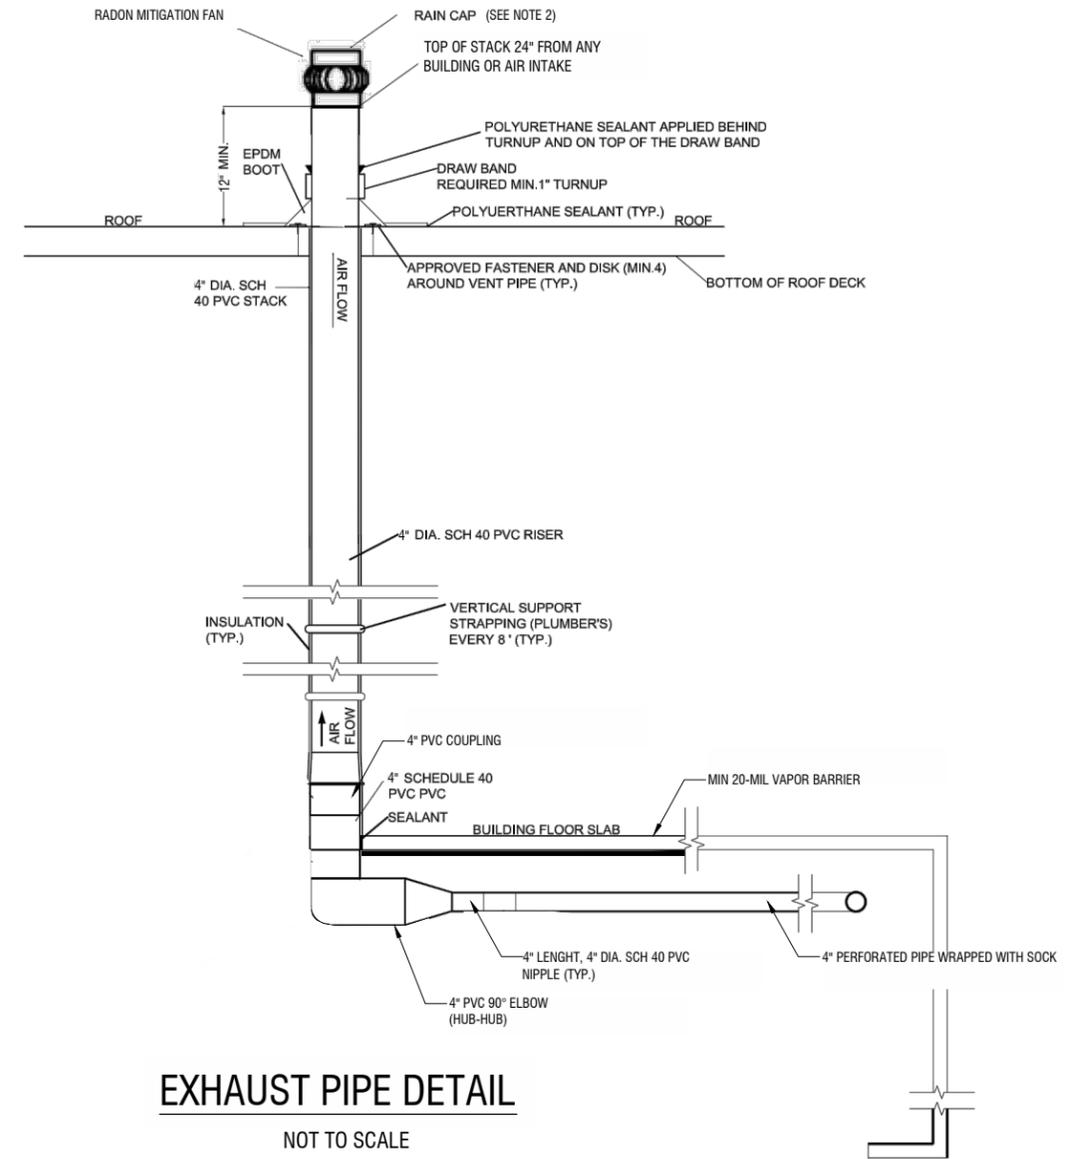

EXHAUST PIPE DETAIL

NOT TO SCALE

Scale: NTS



**ATHENICA  
ENVIRONMENTAL  
SERVICES, INC.**  
Environmental Consultants

Date: DECEMBER 11, 2014

Drawn by: DIANA SECLIN


Checked by: EZGI KARAYEL

Drawing Scale: NOT TO SCALE

Project No.: 14-133-1276

Site map: 9029 FLATLANDS AVE  
BROOKLYN, NEW YORK 11236

Figure: 7  
Title: DETAILS OF SUB-SLAB  
DEPRESSURIZATION SYSTEM &  
VAPOR BARRIER SYSTEM

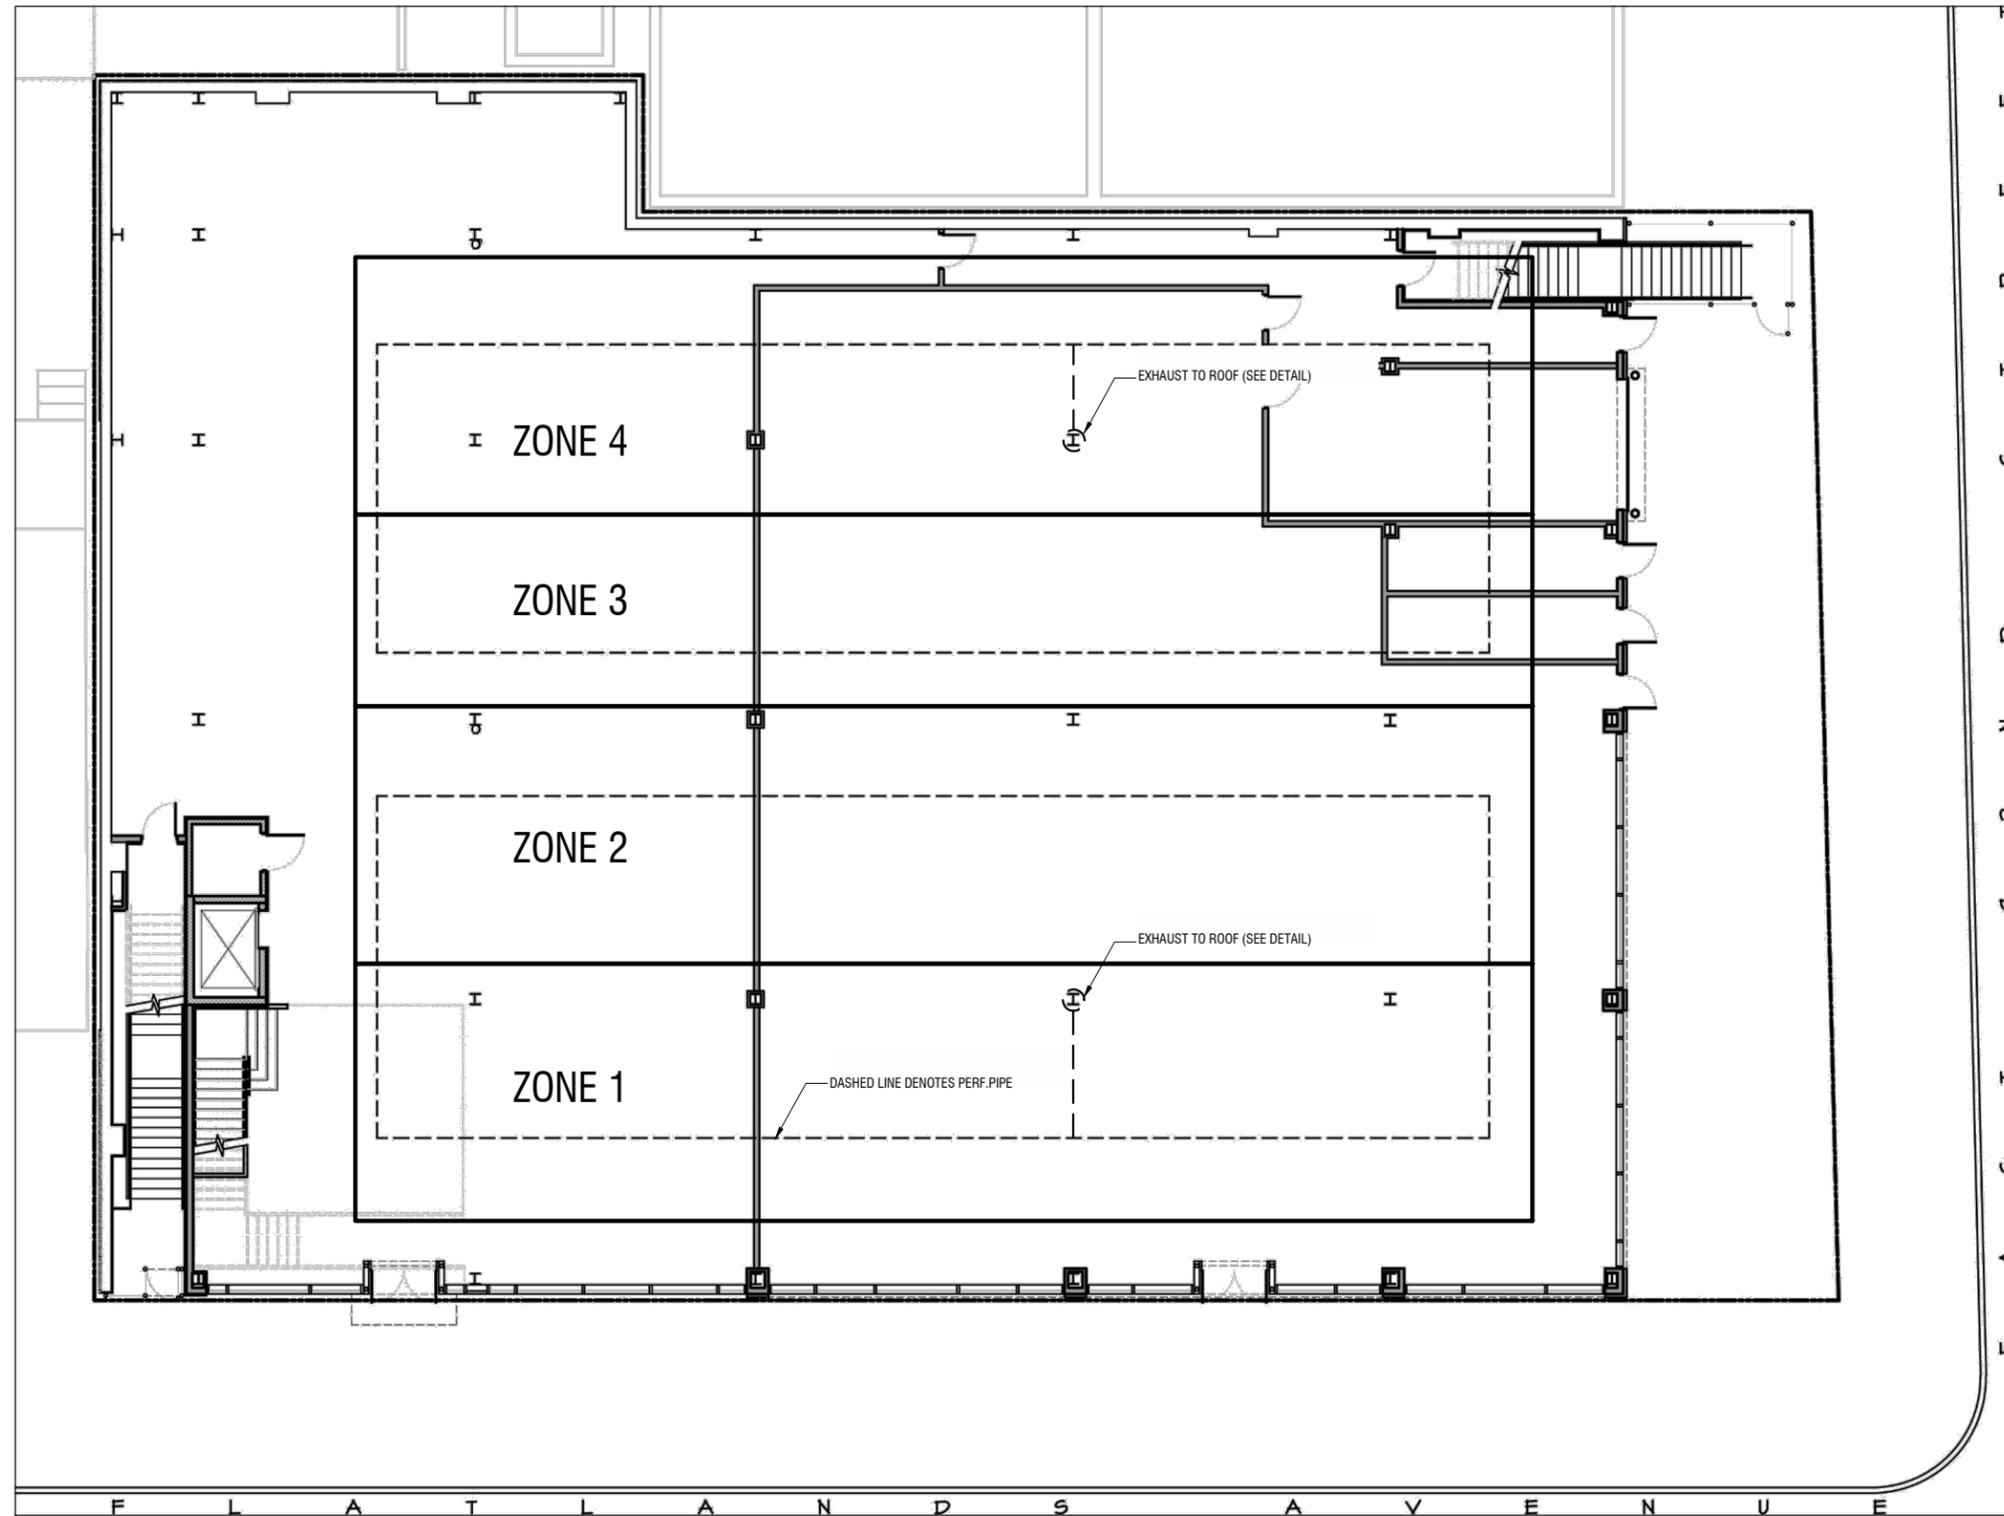

Scale: NTS



Date:	DECEMBER 11, 2014	Site map: 9029 FLATLANDS AVE BROOKLYN, NEW YORK 11236
Drawn by:	DIANA SECLEN	
Checked by:	EZGI KARAYEL	Figure: 8 Title: SSDS LAYOUT
Drawing Scale:	NOT TO SCALE	
Project No.:	14-133-1276	

# TABLES

**Table 1**  
Soil Cleanup Objectives (SCOs)

Contaminant	CAS Number	NYSDEC Part 375-6 SCOs for Unrestricted Use (ppm)
<b>Volatile Organic Compounds</b>		
1,1,1-Trichloroethane	71-55-6	0.68
1,1-Dichloroethane	75-34-3	0.27
1,1-Dichloroethene	75-35-4	0.33
1,2-Dichlorobenzene	95-50-1	1.1
1,2-Dichloroethane	107-06-2	0.02
cis-1,2-Dichloroethene	156-59-2	0.25
trans-1,2-Dichloroethene	156-60-5	0.19
1,3-Dichlorobenzene	541-73-1	2.4
1,4-Dichlorobenzene	106-46-7	1.8
1,4-Dioxane	123-91-1	0.1
Acetone	67-64-1	0.05
Benzene	71-43-2	0.06
Butylbenzene	104-51-8	12
Carbon tetrachloride	56-23-5	0.76
Chlorobenzene	108-90-7	1.1
Chloroform	67-66-3	0.37
Ethylbenzene	100-41-4	1
Hexachlorobenzene	118-74-1	0.33
Methyl ethyl ketone	78-93-3	0.12
Methyl tert-butyl ether	1634-04-4	0.93
Methylene chloride	75-09-2	0.05
n-Propylbenzene	103-65-1	3.9
sec-Butylbenzene	135-98-8	11
tert-Butylbenzene	98-06-6	5.9
Tetrachloroethene	127-18-4	1.3
Toluene	108-88-3	0.7
Trichloroethene	79-01-6	0.47
1,2,4-Trimethylbenzene	95-63-6	3.6
1,3,5-Trimethylbenzene	108-67-8	8.4
Vinyl chloride	75-01-4	0.02
Xylene (mixed)	1330-20-7	0.26
<b>Semivolatile Organic Compounds</b>		
Acenaphthene	83-32-9	20
Acenaphthylene	208-96-8	100
Anthracene	120-12-7	100
Benz(a)anthracene	56-55-3	1
Benzo(a)pyrene	50-32-8	1
Benzo(b)fluoranthene	205-99-2	1
Benzo(g,h,i)perylene	191-24-2	100
Benzo(k)fluoranthene	207-08-9	0.8
Chrysene	218-01-9	1
Dibenz(a,h)anthracene	53-70-3	0.33
Fluoranthene	206-44-0	100
Fluorene	86-73-7	30
Ideno(1,2,3-cd)pyrene	193-39-5	0.5
m-Cresol	108-39-4	0.33
Naphthalene	91-20-3	12
o-Cresol	95-48-7	0.33
p-Cresol	106-44-5	0.33
Pentachlorophenol	87-86-5	0.8
Phenanthrene	85-01-8	100
Phenol	108-95-2	0.33
Pyrene	129-00-0	100

**Table 1**  
Soil Cleanup Objectives (SCOs)

Contaminant	CAS Number	NYSDEC Part 375-6 SCOs for Unrestricted Use (ppm)
<b>Pesticides/PCBs</b>		
2,4,5-TP Acid (Silvex)	93-72-1	3.8
4,4'-DDE	72-55-9	0.0033
4,4'-DDT	50-29-9	0.0033
4,4'-DDD	72-54-8	0.0033
Aldrin	309-00-2	0.005
alpha-BHC	319-84-6	0.02
beta-BHC	319-85-7	0.036
Chlordane (alpha)	5103-71-9	0.094
delta-BHC	319-86-8	0.04
Dibenzofuran	132-64-9	7
Dieldrin	60-57-1	0.005
Endosulfan I	959-98-8	2.4
Endosulfan II	33213-65-9	2.4
Endosulfan sulfate	1031-07-8	2.4
Endrin	72-20-8	0.014
Heptachlor	76-44-8	0.042
Lindane	58-89-9	0.1
Polychlorinated biphenyls	1336-36-3	0.1
<b>Metals</b>		
Arsenic	7440-38-2	13
Barium	7440-39-3	350
Beryllium	7440-41-7	7.2
Cadmium	7440-43-9	2.5
Chromium hexavalent	18540-29-9	1
Chromium trivalent	16065-83-1	30
Copper	7440-50-8	50
Total Cyanide		27
Lead	7439-92-1	63
Manganese	7439-96-5	1600
Total Mercury		0.18
Nickel	7440-02-0	30
Selenium	7782-49-2	3.9
Silver	7440-22-4	2
Zinc	7440-66-6	109

# APPENDICES

**APPENDIX 1**

**CITIZEN PARTICIPATION PLAN**

# CITIZEN PARTICIPATION PLAN

The NYC Office of Environmental Remediation and Polizzotto Realty have established this Citizen Participation Plan because the opportunity for citizen participation is an important component of the NYC Voluntary Cleanup Program. This Citizen Participation Plan describes how information about the project will be disseminated to the Community during the remedial process. As part of its obligations under the NYC VCP, Polizzotto Realty will maintain a repository for project documents and provide public notice at specified times throughout the remedial program. This Plan also takes into account potential environmental justice concerns in the community that surrounds the project Site. Under this Citizen Participation Plan, project documents and work plans are made available to the public in a timely manner. Public comment on work plans is strongly encouraged during public comment periods. Work plans are not approved by the NYC Office of Environmental Remediation (OER) until public comment periods have expired and all comments are formally reviewed. An explanation of cleanup plans in the form of a public meeting or informational session is available upon request to OER's project manager assigned to this Site, Sarah Pong, who can be contacted about these issues or any others questions, comments or concerns that arise during the remedial process at (212) 788-8841

**Project Contact List.** OER has established a Site Contact List for this project to provide public notices in the form of fact sheets to interested members of the Community. Communications will include updates on important information relating to the progress of the cleanup program at the Site as well as to request public comments on the cleanup plan. The Project Contact List includes owners and occupants of adjacent buildings and homes, principal administrators of nearby schools, hospitals and day care centers, the public water supplier that serves the area, established document repositories, the representative Community Board, City Council members, other elected representatives and any local Brownfield Opportunity Area (BOA) grantee organizations. Any member of the public or organization will be added to the Site Contact List on request. A copy of the Site Contact List is maintained by OER's project manager. If you would like to be added to the Project Contact List, contact NYC OER at (212) 788-8841 or by email at [brownfields@cityhall.nyc.gov](mailto:brownfields@cityhall.nyc.gov).

**Repositories.** A document repository is maintained in the nearest public library that maintains evening and weekend hours. This document repository is intended to house, for community review, all principal documents generated during the cleanup program including Remedial Investigation plans and reports, Remedial Action work plans and reports, and all public notices and fact sheets produced during the lifetime of the remedial project. Polizzotto Realty will inspect the repositories to ensure that they are fully populated with project information. The repository for this project is:

Brooklyn Public Library – Carnarsie Branch  
1580 Rockaway Parkway, Brooklyn, New York, 11236

(718) 257-6547

Monday: 10:00 AM to 6:00 PM

Tuesday: 10:00 AM to 8:00 PM

Wednesday: 10:00 AM to 8:00 PM

Thursday: 10:00 AM to 8:00 PM

Friday: 10:00 AM to 6:00 PM

Saturday: 10:00 AM to 5:00 PM

Sunday: Closed

**Digital Documentation.** NYC OER strongly encourages the use of digital documents in repositories as a means of minimizing paper use while also increasing convenience in access and ease of use.

**Identify Issues of Public Concern.** The major issues of concern to the public will be potential impacts of nuisance odors and dust during the disturbance of soil at the Site. This work will be performed in accordance with procedures that will be specified under a Remedial

Program and considers and takes preventive measures for exposure to future residents of the property and those on adjacent properties during construction. Detailed plans to monitor the potential for exposure including a CHASP and a CAMP are required components of the remedial program. Implementation of these plans will be under the direct oversight of the NYCOER.

**Public Notice and Public Comment.** Public notice to all members of the Project Contact List is required at three major steps during the performance of the cleanup program (listed

below) and at other points that may be required by OER. Notices will include Fact Sheets with descriptive project summaries, updates on recent and upcoming project activities, repository information, and important phone and email contact information. All notices will be prepared by Polizzotto Realty, reviewed and approved by OER prior to distribution and mailed by Polizzotto Realty. Public comment is solicited in public notices for all work plans developed under the NYC Voluntary Cleanup Program. Final review of all work plans by OER will consider all public comments. Approval will not be granted until the public comment period has been completed.

**Citizen Participation Milestones.** Public notice and public comment activities occur at several steps during a typical NYC VCP project. See flow chart on the following page, which identifies when during the NYC VCP public notices are issued: These steps include:

**Public Notice of the availability of the Remedial Investigation Report and Remedial Action Work Plan and a 30-day public comment period on the Remedial Action Work Plan.**

- Public notice in the form of a Fact Sheet is sent to all parties listed on the Site Contact List announcing the availability of the Remedial Investigation Report and Remedial Action Work Plan and the initiation of a 30-day public comment period on the Remedial Action Work Plan. The Fact Sheet summarizes the findings of the RIR and provides details of the RAWP. The public comment period will be extended an additional 15 days upon public request. A public meeting or informational session will be conducted by OER upon request.

**Public Notice announcing the approval of the RAWP and the start of remediation**

- Public notice in the form of a Fact Sheet is sent to all parties listed on the Site Contact List announcing the approval of the RAWP and the start of remediation.

**Public Notice announcing the completion of remediation, designation of Institutional and Engineering Controls and issuance of the Notice of Completion**

- Public notice in the form of a Fact Sheet is sent to all parties listed on the Site Contact List announcing the completion of remediation, providing a list of all Institutional and Engineering Controls implemented for to the Site and announcing the issuance of the Notice of Completion.

**APPENDIX 2**

**SUSTAINABILITY STATEMENT**

# SUSTAINABILITY STATEMENT

This Sustainability Statement documents sustainable activities and green remediation efforts planned under this remedial action.

**Reuse of Clean, Recyclable Materials.** Reuse of clean, locally-derived recyclable materials reduces consumption of non-renewable virgin resources and can provide energy savings and greenhouse gas reduction.

An estimate of the quantity (in tons) of clean, non-virgin materials (reported by type of material) reused under this plan will be quantified and reported in the RAR.

**Reduce Consumption of Virgin and Non-Renewable Resources.** Reduced consumption of virgin and non-renewable resources lowers the overall environmental impact of the project on the region by conserving these resources.

An estimate of the quantity (in tons) of virgin and non-renewable resources, the use of which will be avoided under this plan, will be quantified and reported in the RAR.

**Reduced Energy Consumption and Promotion of Greater Energy Efficiency.** Reduced energy consumption lowers greenhouse gas emissions, improves local air quality, lessens in-city power generation requirements, can lower traffic congestion, and provides substantial cost savings.

Best efforts will be made to quantify energy efficiencies achieved during the remediation and will be reported in the Remedial Action Report (RAR). Where energy savings cannot be easily quantified, a gross indicator of the amount of energy saved or the means by which energy savings was achieved will be reported.

**Conversion to Clean Fuels.** Use of clean fuel improves NYC's air quality by reducing harmful emissions.

An estimate of the volume of clean fuels used during remedial activities will be quantified and reported in the RAR.

**Recontamination Control.** Recontamination after cleanup and redevelopment is completed undermines the value of work performed, may result in a property that is less protective of public health or the environment, and may necessitate additional cleanup work later or impede future

redevelopment. Recontamination can arise from future releases that occur within the property or by influx of contamination from off-Site.

An estimate of the area of the Site that utilizes recontamination controls under this plan will be reported in the RAR in square feet.

**Storm-water Retention.** Storm-water retention improves water quality by lowering the rate of combined storm-water and sewer discharges to NYC's sewage treatment plants during periods of precipitation, and reduces the volume of untreated influent to local surface waters.

An estimate of the enhanced storm-water retention capability of the redevelopment project will be included in the RAR.

**Linkage with Green Building.** Green buildings provide a multitude of benefits to the city across a broad range of areas, such as reduction of energy consumption, conservation of resources, and reduction in toxic materials use.

The number of Green Buildings that are associated with this brownfield redevelopment property will be reported in the RAR. The total square footage of green building space created as a function of this brownfield redevelopment will be quantified for residential, commercial and industrial/manufacturing uses.

**Paperless Brownfield Cleanup Program.** Polizzotto Realty is participating in OER's Paperless Brownfield Cleanup Program. Under this program, submission of electronic documents will replace submission of hard copies for the review of project documents, communications and milestone reports.

**Low-Energy Project Management Program.** Polizzotto Realty is participating in OER's low-energy project management program. Under this program, whenever possible, meetings are held using remote communication technologies, such as videoconferencing and teleconferencing to reduce energy consumption and traffic congestion associated with personal transportation.

**Trees and Plantings.** Trees and other plantings provide habitat and add to NYC's environmental quality in a wide variety of ways. Native plant species and native habitat provide optimal support to local fauna, promote local biodiversity, and require less maintenance.

An estimate of the land area that will be vegetated, including the number of trees planted or preserved, will be reported in square feet in the RAR.

## **APPENDIX 3**

# **SOIL/MATERIALS MANAGEMENT PLAN**

# **SOIL/MATERIALS MANAGEMENT PLAN**

## **1.1 Soil Screening Methods**

Visual, olfactory and PID soil screening and assessment will be performed under the supervision of a Qualified Environmental Professional and will be reported in the RAR. Soil screening will be performed during invasive work performed during the remedy and development phases prior to issuance of the Notice of Completion.

## **1.2 Stockpile Methods**

Excavated soil from suspected areas of contamination (e.g., hot spots, USTs, drains, etc.) will be stockpiled separately and will be segregated from clean soil and construction materials. Stockpiles will be used only when necessary and will be removed as soon as practicable. While stockpiles are in place, they will be inspected daily, and before and after every storm event. Results of inspections will be recorded in a logbook and maintained at the Site and available for inspection by OER. Excavated soils will be stockpiled on, at minimum, double layers of 8-mil minimum sheeting, will be kept covered at all times with appropriately anchored plastic tarps, and will be routinely inspected. Broken or ripped tarps will be promptly replaced.

All stockpile activities will be compliant with applicable laws and regulations. Soil stockpile areas will be appropriately graded to control run-off in accordance with applicable laws and regulations. Stockpiles of excavated soils and other materials shall be located at least of 50 feet from the property boundaries, where possible. Hay bales or equivalent will surround soil stockpiles except for areas where access by equipment is required. Silt fencing and hay bales will be used as needed near catch basins, surface waters and other discharge points.

## **1.3 Characterization of Excavated Materials**

Soil/fill or other excavated media that is transported off-Site for disposal will be sampled in a manner required by the receiving facility, and in compliance with applicable laws and regulations. Soils proposed for reuse on-Site will be managed as defined in this plan.

## **1.4 Materials Excavation, Load-Out, and Departure**

The PE/QEP overseeing the remedial action will:

- oversee remedial work and the excavation and load-out of excavated material;
- ensure that there is a party responsible for the safe execution of invasive and other work performed under this work plan;
- ensure that Site development activities and development-related grading cuts will not interfere with, or otherwise impair or compromise the remedial activities proposed in this RAWP;
- ensure that the presence of utilities and easements on the Site has been investigated and that any identified risks from work proposed under this plan are properly addressed by appropriate parties;
- ensure that all loaded outbound trucks are inspected and cleaned if necessary before leaving the Site;
- ensure that all egress points for truck and equipment transport from the Site will be kept clean of Site-derived materials during Site remediation.

Locations where vehicles exit the Site shall be inspected daily for evidence of soil tracking off premises. Cleaning of the adjacent streets will be performed as needed to maintain a clean condition with respect to Site-derived materials.

Open and uncontrolled mechanical processing of historical fill and contaminated soil on-Site will not be performed without prior OER approval.

### **1.5 Off-Site Materials Transport**

Loaded vehicles leaving the Site will comply with all applicable materials transportation requirements (including appropriate covering, manifests, and placards) in accordance with applicable laws and regulations, including use of licensed haulers in accordance with 6 NYCRR Part 364. If loads contain wet material capable of causing leakage from trucks, truck liners will be used. Queuing of trucks will be performed on-Site, when possible in order to minimize off Site disturbance. Off-Site queuing will be minimized.

Outbound truck transport routes are from Flatlands Avenue to Flatbush Avenue. This routing takes into account the following factors: (a) limiting transport through residential areas and past sensitive sites; (b) use of mapped truck routes; (c) minimizing off-Site queuing of trucks entering the facility; (d) limiting total distance to major highways; (e) promoting safety in access to

highways; and (f) overall safety in transport. To the extent possible, all trucks loaded with Site materials will travel from the Site using these truck routes. Trucks will not stop or idle in the neighborhood after leaving the project Site.

## **1.6 Materials Disposal Off-Site**

The following documentation will be established and reported by the PE/QEP for each disposal destination used in this project to document that the disposal of regulated material exported from the Site conforms with applicable laws and regulations: (1) a letter from the PE/QEP or Enrollee to each disposal facility describing the material to be disposed and requesting written acceptance of the material. This letter will state that material to be disposed is regulated material generated at an environmental remediation Site in Brooklyn, New York under a governmental remediation program. The letter will provide the project identity and the name and phone number of the PE/QEP or Enrollee. The letter will include as an attachment a summary of all chemical data for the material being transported; and (2) a letter from each disposal facility stating it is in receipt of the correspondence (1, above) and is approved to accept the material. These documents will be included in the RAR.

The Remedial Action Report will include an itemized account of the destination of all material removed from the Site during this remedial action. Documentation associated with disposal of all material will include records and approvals for receipt of the material. This information will be presented in the RAR.

All impacted soil/fill or other waste excavated and removed from the Site will be managed as regulated material and will be disposed in accordance with applicable laws and regulations. Historic fill and contaminated soils taken off-Site will be handled as solid waste and will not be disposed at a Part 360-16 Registration Facility (also known as a Soil Recycling Facility).

Waste characterization will be performed for off-Site disposal in a manner required by the receiving facility and in conformance with its applicable permits. Waste characterization sampling and analytical methods, sampling frequency, analytical results and QA/QC will be reported in the RAR. A manifest system for off-Site transportation of exported materials will be employed. Manifest information will be reported in the RAR. Hazardous wastes derived from

on-Site will be stored, transported, and disposed of in compliance with applicable laws and regulations.

If disposal of soil/fill from this Site is proposed for unregulated disposal (i.e., clean soil removed for development purposes), including transport to a Part 360-16 Registration Facility, a formal request will be made for approval by OER with an associated plan compliant with 6NYCRR Part 360-16. This request and plan will include the location, volume and a description of the material to be recycled, including verification that the material is not impacted by site uses and that the material complies with receipt requirements for recycling under 6NYCRR Part 360. This material will be appropriately handled on-Site to prevent mixing with impacted material.

### **1.7 Materials Reuse On-Site**

Soil and fill that is derived from the property that meets the soil cleanup objectives established in this plan may be reused on-Site. The soil cleanup objectives for on-Site reuse are listed in Table 1. 'Reuse on-Site' means material that is excavated during the remedy or development, does not leave the property, and is relocated within the same property and on comparable soil/fill material, and addressed pursuant to the NYC VCP agreement subject to Engineering and Institutional Controls. The PE/QEP will ensure that reused materials are segregated from other materials to be exported from the Site and that procedures defined for material reuse in this RAWP are followed. OER will be notified if soil will be reused on-Site.

Organic matter (wood, roots, stumps, etc.) or other waste derived from clearing and grubbing of the Site will not be buried on-Site. Soil or fill excavated from the site for grading or other purposes will not be reused within a cover soil layer or within landscaping berms.

### **1.8 Demarcation**

After completion of hotspot removal and any other invasive remedial activities, and prior to backfilling, the top of the residual soil/fill will be defined by one of three methods: (1) placement of a demarcation layer. The demarcation layer will consist of geosynthetic fencing or equivalent material to be placed on the surface of residual soil/fill to provide an observable reference layer. A description or map of the approximate depth of the demarcation layer will be provided in the SMP; or (2) a land survey of the top elevation of residual soil/fill before the placement of cover soils, pavement and associated sub-soils, or other materials or structures or, (3) all materials

beneath the approved cover will be considered impacted and subject to site management after the remedy is complete. Demarcation may be established by one or any combination of these three methods. As appropriate, a map showing the method of demarcation for the Site and all associated documentation will be presented in the RAR.

This demarcation will constitute the top of the site management horizon. Materials within this horizon require adherence to special conditions during future invasive activities as defined in the Site Management Plan.

### **1.9 Import of Backfill Soil from Off-Site Sources**

This Section presents the requirements for imported fill materials to be used below the cover layer and within the clean soil cover layer. All imported soils will meet OER-approved backfill and cover soil quality objectives for this Site. The backfill and cover soil quality objectives are listed in Table 1.

A process will be established to evaluate sources of backfill and cover soil to be imported to the Site, and will include an examination of source location, current and historical use(s), and any applicable documentation. Material from industrial sites, spill sites, environmental remediation sites or other potentially contaminated sites will not be imported to the Site.

The following potential sources may be used pending attainment of backfill and cover soil quality objectives:

- Clean soil from construction projects at non-industrial sites in compliance with applicable laws and regulations;
- Clean soil from roadway or other transportation-related projects in compliance with applicable laws and regulations;
- Clean recycled concrete aggregate (RCA) from facilities permitted or registered by the regulations of NYS DEC.

All materials received for import to the Site will be approved by a PE/QEP and will be in compliance with provisions in this RAWP. The RAR will report the source of the fill, evidence that an inspection was performed on the source, chemical sampling results, frequency of testing, and a Site map indicating the locations where backfill or soil cover was placed.

## **Source Screening and Testing**

Inspection of imported fill material will include visual, olfactory and PID screening for evidence of contamination. Materials imported to the Site will be subject to inspection, as follows:

- Trucks with imported fill material will be in compliance with applicable laws and regulations and will enter the Site at designated locations;
- The PE/QEP is responsible to ensure that every truck load of imported material is inspected for evidence of contamination; and
- Fill material will be free of solid waste including pavement materials, debris, stumps, roots, and other organic matter, as well as ashes, oil, perishables or foreign matter.

Composite samples of imported material will be taken at a minimum frequency of one sample for every 500 cubic yards of material. Once it is determined that the fill material meets imported backfill or cover soil chemical requirements and is non-hazardous, and lacks petroleum contamination, the material will be loaded onto trucks for delivery to the Site.

Recycled concrete aggregate (RCA) will be imported from facilities permitted or registered by NYSDEC. Facilities will be identified in the RAR. A PE/QEP is responsible to ensure that the facility is compliant with 6NYCRR Part 360 registration and permitting requirements for the period of acquisition of RCA. RCA imported from compliant facilities will not require additional testing, unless required by NYSDEC under its terms for operation of the facility. RCA imported to the Site must be derived from recognizable and uncontaminated concrete. RCA material is not acceptable for, and will not be used as cover material.

### **1.10 Fluids Management**

All liquids to be removed from the Site, including dewatering fluids, will be handled, transported and disposed in accordance with applicable laws and regulations. Liquids discharged into the New York City sewer system will receive prior approval by New York City Department of Environmental Protection (NYC DEP). The NYC DEP regulates discharges to the New York City sewers under Title 15, Rules of the City of New York Chapter 19. Discharge to the New York City sewer system will require an authorization and sampling data demonstrating that the groundwater meets the City's discharge criteria. The dewatering fluid will be pretreated as

necessary to meet the NYC DEP discharge criteria. If discharge to the City sewer system is not appropriate, the dewatering fluids will be managed by transportation and disposal at an off-Site treatment facility.

Discharge of water generated during remedial construction to surface waters (i.e. a stream or river) is prohibited without a SPDES permit issued by New York State Department of Environmental Conservation.

### **1.11 Stormwater Pollution Prevention**

Applicable laws and regulations pertaining to storm-water pollution prevention will be addressed during the remedial program. Erosion and sediment control measures identified in this RAWP (silt fences and barriers, and hay bale checks) will be installed around the entire perimeter of the remedial construction area and inspected once a week and after every storm event to ensure that they are operating appropriately. Discharge locations will be inspected to determine whether erosion control measures are effective in preventing significant impacts to receptors. Results of inspections will be recorded in a logbook and maintained at the Site and available for inspection by OER. All necessary repairs shall be made immediately. Accumulated sediments will be removed as required to keep the barrier and hay bale check functional. Undercutting or erosion of the silt fence toe anchor will be repaired immediately with appropriate backfill materials. Manufacturer's recommendations will be followed for replacing silt fencing damaged due to weathering.

### **1.12 Contingency Plan**

This contingency plan is developed for the remedial construction to address the discovery of unknown structures or contaminated media during excavation. Identification of unknown contamination source areas during invasive Site work will be promptly communicated to OER's Project Manager. Petroleum spills will be reported to the NYS DEC Spill Hotline. These findings will be included in the daily report. If previously unidentified contaminant sources are found during on-Site remedial excavation or development-related excavation, sampling will be performed on contaminated source material and surrounding soils and reported to OER. Chemical analytical testing will be performed for TAL metals, TCL volatiles and semi-volatiles, TCL pesticides and PCBs, as appropriate.

## **1.13 Odor, Dust, and Nuisance Control**

### **Odor Control**

All necessary means will be employed to prevent on- and off-Site odor nuisances. At a minimum, procedures will include: (a) limiting the area of open excavations; (b) shrouding open excavations with tarps and other covers; and (c) use of foams to cover exposed odorous soils. If odors develop and cannot otherwise be controlled, additional means to eliminate odor nuisances will include: (d) direct load-out of soils to trucks for off-Site disposal; and (e) use of chemical odorants in spray or misting systems.

This odor control plan is capable of controlling emissions of nuisance odors. If nuisance odors are identified, work will be halted and the source of odors will be identified and corrected. Work will not resume until all nuisance odors have been abated. OER will be notified of all odor complaint events. Implementation of all odor controls, including halt of work, will be the responsibility of the PE/QEP's certifying the Remedial Action Report.

### **Dust Control**

Dust management during invasive on-Site work will include, at a minimum:

- Use of a dedicated water spray methodology for roads, excavation areas and stockpiles.
- Use of properly anchored tarps to cover stockpiles.
- Exercise extra care during dry and high-wind periods.
- Use of gravel or recycled concrete aggregate on egress and other roadways to provide a clean and dust-free road surface.

This dust control plan is capable of controlling emissions of dust. If nuisance dust emissions are identified, work will be halted and the source of dusts will be identified and corrected. Work will not resume until all nuisance dust emissions have been abated. OER will be notified of all dust complaint events. Implementation of all dust controls, including halt of work, will be the responsibility of the PE/QEP's responsible for certifying the Remedial Action Report.

**Other Nuisances**

Noise control will be exercised during the remedial program. All remedial work will conform, at a minimum, to NYC noise control standards.

Rodent control will be provided, during Site clearing and grubbing, and during the remedial program, as necessary, to prevent nuisances.

## **APPENDIX 4**

# **CONSTRUCTION HEALTH AND SAFETY PLAN**

## ***CONSTRUCTION HEALTH & SAFETY PLAN***

9029 FLATLANDS AVENUE  
BROOKLYN, NEW YORK

Prepared for:

Gambino + LaPorta Architecture, DPC  
1928 Richmond Road, Staten Island, NY 10304  
tl@gl-arch.com

Prepared by:



ATHENICA ENVIRONMENTAL  
SERVICES, INC.

**Environmental Consultants**

45-09 GREENPOINT AVENUE  
LONG ISLAND CITY, NY 11104

## TABLE OF CONTENTS

<b>1.0</b>	<b>GLOSSARY OF TERMS.....</b>	<b>1-1</b>
<b>2.0</b>	<b>INTRODUCTION.....</b>	<b>2-3</b>
2.1	SITE HISTORY.....	2-4
2.2	SCOPE OF WORK.....	2-5
<b>3.0</b>	<b>KEY PERSONNEL .....</b>	<b>3-7</b>
3.1	PROJECT MANAGER (PM).....	3-7
3.2	CONSTRUCTION SUPERINTENDENT (CS).....	3-7
3.3	HEALTH AND SAFETY OFFICER (HSO).....	3-8
3.4	PROJECT SAFETY MANAGER (PSM).....	3-9
3.5	EMPLOYEE SAFETY RESPONSIBILITIES.....	3-9
<b>4.0</b>	<b>ACTIVITY HAZARD ANALYSIS.....</b>	<b>4-1</b>
4.1	CHEMICAL HAZARDS.....	4-1
4.2	PHYSICAL HAZARDS.....	4-3
4.3	ENVIRONMENTAL HAZARDS.....	4-3
4.3.1	Heat Stress.....	4-4
4.3.2	Exposure to Cold.....	4-7
	<b>4.3.2.1</b> Cold Stress Conditions and Symptoms.....	4-7
	<b>4.3.2.2</b> Monitoring and Preventative Actions.....	4-8
4.3.3	Biological Hazards.....	4-12
4.3.4	Noise.....	4-12
4.4	VEHICLE AND HEAVY EQUIPMENT SAFETY.....	4-12
4.4.1	Vehicle Safety.....	4-12
4.4.2	Heavy Equipment Safety.....	4-13
4.5	TASK-SPECIFIC ACTIVITY HAZARD ANALYSES (AHA).....	4-13
<b>5.0</b>	<b>WORK AND SUPPORT AREAS.....</b>	<b>5-1</b>
5.1	EXCLUSION ZONE (EZ).....	5-1
5.2	CONTAMINATION - REDUCTION ZONE (CRZ).....	5-1
5.3	SUPPORT ZONE (SZ).....	5-1
5.4	SITE CONTROL LOG.....	5-1
5.5	GENERAL.....	5-2
<b>6.0</b>	<b>PROTECTIVE EQUIPMENT .....</b>	<b>6-1</b>
6.1	ANTICIPATED PROTECTION LEVELS.....	6-1
6.2	PROTECTION LEVEL DESCRIPTIONS.....	6-2
	6.2.1 Level D.....	6-2
<b>7.0</b>	<b>DECONTAMINATION PROCEDURES.....</b>	<b>7-1</b>
7.1	PERSONNEL DECONTAMINATION.....	7-1

---

7.1.1	Suspected Contamination.....	7-1
7.1.2	Personal Hygiene .....	7-1
7.2	EQUIPMENT DECONTAMINATION .....	7-1
7.3	DISPOSAL OF WASTES .....	7-2
7.4	DUST /EROSION CONTROL.....	7-2
<b>8.0</b>	<b>AIR MONITORING.....</b>	<b>8-1</b>
8.1	WORK AREA AIR MONITORING.....	8-1
8.1.1	Direct Reading Air Monitoring.....	8-1
8.1.2	Instrumentation .....	8-1
8.1.3	Use And Maintenance Of Survey Equipment.....	8-1
8.1.4	Air Monitoring Recordkeeping.....	8-2
8.1.5	Action Levels .....	8-2
<b>9.0</b>	<b>EMERGENCY RESPONSE AND CONTINGENCY PLAN (ERCP) .....</b>	<b>9-4</b>
9.1	PRE-EMERGENCY PLANNING.....	9-4
9.2	EMERGENCY RECOGNITION AND PREVENTION.....	9-5
9.3	EMERGENCY TELEPHONE NUMBERS .....	9-6
9.4	PERSONNEL ROLES, LINES OF AUTHORITY, AND COMMUNICATIONS.....	9-9
9.4.1	Responsibilities and Duties.....	9-9
9.4.2	On-Site Emergency Coordinator Duties .....	9-9
9.5	SAFE DISTANCES AND PLACES OF REFUGE.....	9-11
9.6	EVACUATION ROUTES AND PROCEDURES .....	9-12
9.6.1	Evacuation Signals and Routes.....	9-12
9.6.2	Evacuation Procedures.....	9-12
9.7	EMERGENCY SPILL RESPONSE PROCEDURES AND EQUIPMENT .....	9-14
9.7.1	Notification Procedures .....	9-14
9.7.2	Procedure for Containing/Collecting Spills.....	9-14
9.7.3	Emergency Response Equipment .....	9-16
9.7.4	Emergency Spill Response Clean-Up Materials and Equipment .....	9-16
9.8	EMERGENCY CONTINGENCY PLAN .....	9-16
9.9	MEDICAL EMERGENCY CONTINGENCY MEASURES .....	9-16
9.9.1	Response .....	9-16
9.9.2	Notification .....	9-18
9.10	FIRE CONTINGENCY MEASURES.....	9-18
9.10.1	Response .....	9-19
9.11	HAZARDOUS WEATHER CONTINGENCY MEASURES .....	9-19
9.11.1	Response .....	9-19
9.11.2	Notification .....	9-19
9.12	SPILL/RELEASE CONTINGENCY MEASURES.....	9-20
9.12.1	Response .....	9-20

<b>10.0</b>	<b>TRAINING REQUIREMENTS .....</b>	<b>10-1</b>
10.1	SITE-SPECIFIC TRAINING ORIENTATION .....	10-1
10.2	DAILY SAFETY MEETINGS.....	10-1

---

***FIGURES***

---

FIGURE 2-1	SITE LOCATION MAP
FIGURE 9-1	DIRECTIONS AND HOSPITAL ROUTE MAP

***TABLES***

---

TABLE 4-1	CHEMICAL DATA
TABLE 4.3.2A	COLD WEATHER INJURIES
TABLE 4.3.2B	COLD STRESS PREVENTION
TABLE 4.3.2C	COLD WEATHER CLOTHING REQUIREMENTS
TABLE 4.3.2D	COOLING POWER OF WIND ON EXPOSED FLESH EXPRESSED AS EQUIVALENT TEMPERATURE
TABLE 4.3.2E	TLV WORK/WARMUP SCHEDULE FOR FOUR-HOUR SHIFT
TABLE 9-1	EMERGENCY TELEPHONE NUMBERS

***APPENDICES***

---

APPENDIX A	HEALTH AND SAFETY PLAN CERTIFICATION HEALTH & SAFETY PLAN ACKNOWLEDGEMENT NOTICE OF SAFETY VIOLATION PRE-JOB SAFETY CHECKLIST
APPENDIX B	HEALTH AND SAFETY PLAN AMENDMENTS AND DOCUMENTATION FORM
APPENDIX C	SAFETY MEETING FORMS AIR MONITORING FORMS

---

## **1.0**     ***GLOSSARY OF TERMS***

AHA:	Activity Hazard Analysis
BZ:	Breathing Zone
C:	Ceiling Limit
CNS	Central Nervous System
CTPV:	Coal tar pitch volatiles
CRZ:	Contamination Reduction Zone
CSP:	Construction Superintendent
CZ:	Clean Zone
dba:	Decibels Adjusted
ERCP:	Emergency Response and Contingency Plan
EZ:	Exclusion Zone
FDNY:	New York City Fire Department
GI:	Gastrointestinal
HSO:	Health & Safety Officer
IP:	Ionization Potential
Mg/m <sup>3</sup> :	Micrograms per cubic meter
MPH:	Miles per hour
NIOSH:	National Institute for Occupational Safety and Health
OSHA:	Occupational Health and Safety Administration

Owner:	Crescent Owners, LLC
PAHs:	Poly aromatic hydrocarbons
PEL:	Permissible Exposure Limit
PM:	Project Manager
PPE:	Personal Protective Equipment
PPM:	Parts per Million
PSM:	Project Safety Manager
SHASP:	Site-Specific Health and Safety Plan:
SITE:	9029 Flatlands Avenue, Brooklyn, NY
STEL:	Short-term exposure limit (15 minutes)
SZ:	Support Zone
TLV:	Threshold Limit Value
TWA:	Time-weighted average (8 hours)
USEPA:	United States Environmental Protection Agency
VP:	Vapor Pressure at approximately 68 F° in mm Hg

## **2.0**     *INTRODUCTION*

The Site is located at 9029 Flatlands Avenue, Brooklyn New York (the “Site”). The Site is approximately 17,000 square feet and contains three one-story commercial buildings and is bounded by a residential building and an auto repair facility to the north, several commercial properties to the south, several commercial/retail stores to the east, and a residential building to the west. Currently, one of the buildings on-Site is currently being used as a retail/store front and the other two are vacant. A map of the site boundary is shown in Figure 2-1.

This Site-Specific Construction Health and Safety Plan (CHASP) has been developed by Athenica Environmental Services (“Athenica”) for specific activities associated with the construction of a new residential building at the Site.

This CHASP documents the policies and procedures which will protect workers from potential chemical hazards associated with the soils and/or fill at this Site. Other plans and documentation will establish the policies and procedures that will protect workers from potential physical hazards associated with traditional demolition and construction activities at the Site.

This plan assigns responsibilities, establishes standard operating procedures, and provides for contingencies that may arise during the disturbance of soil/fill at the Site. This CHASP was prepared by the general contractor’s Environmental Consultant, Athenica Environmental Services (Athenica). The general contractor and its subcontractors will be required to utilize this plan when working at the site.

Although this plan focuses on the specific work activities planned for this site, it must remain flexible because of the nature of this work. Conditions may change and unforeseen situations may arise that require modifications from the original plan. Therefore, Athenica only makes representations or warranties as to the adequacy of this CHASP for currently anticipated activities and conditions. This flexibility allows modification by authorized personnel, e.g. Project Manager, Project Safety Manager. All changes to procedures in this plan will be documented in writing using the form provided in Appendix B.

Refusal or failure to comply with this CHASP or violation of any safety procedures by field personnel and/or subcontractors may result in immediate removal from the Site following consultation with the Project Safety Manager (PSM) and the Project Manager (PM).

It is expected that this CHASP will be implemented at a multi-employer work site. Information and references within this plan shall in no way imply or alleviate any other Site contractor from their responsibility to comply with any and all applicable State or Federal statutes or regulations regarding the completion of this project. It is the responsibility of each employer to communicate and coordinate work planning so as to prevent their work activities from becoming a potential hazard to other workers at the project site. Failure to communicate will not alter an employer's responsibilities or obligations for any resulting injuries to their employees.

## **2.1 SITE HISTORY**

Based upon the review of the Phase I Environmental Site Assessment (ESA) report prepared by Athenica in December 2014 (previously submitted to OER), the Site history was established. The Site consists of an approximate 17,000 square foot lot that contains three one-story commercial buildings, two of which are unoccupied. Prior to 1928, the Site was vacant. In 1928, the Site was developed with four adjoining one-story buildings. The present Site configuration of three one-story buildings was developed in 1950.

The AOCs identified for this site include:

1. Presence of trichloroethylene (TCE) and tetrachloroethylene (PCE) in soil vapor underneath the Site.

Summary of work performed under the Remedial Investigation is as follows:

1. Conducted a Site inspection to identify AOCs and physical obstructions (i.e. structures, buildings, etc.);
2. Performed a GPR survey;
3. Installed five (5) soil borings across the entire project Site and collected ten (10) soil samples for chemical analysis to evaluate soil quality;
4. Installed one (1) groundwater monitoring well and collected one (1) groundwater sample for chemical analysis to evaluate groundwater quality;
5. Installed two (2) soil vapor probes throughout the Site and collected two (2) soil vapor samples for chemical analysis.

## **2.2 SCOPE OF WORK**

Although the construction of the new commercial building involves many different activities, only those activities associated with the disturbance and handling of soils are addressed in this CHASP.


The principal tasks covered in this HASP include the following:

- Mobilization/demobilization,
- Sheeting and shoring,
- Excavation of urban fill and/or soil,
- Loading of urban fill into trucks for disposal,
- Installation of footings for new building, and
- Heavy equipment decontamination

Activity Hazard Analyses for these tasks are provided in Section 4.5.

This CHASP has been prepared and approved for the above scope of work. In order to remain approved, any changes to the scope of work will require amendment of the plan. The Site Health and Safety Amendment Documentation form (Appendix B) will be used for all revisions/amendments to this plan.

**FIGURE 2-1  
 SITE LOCATION MAP**

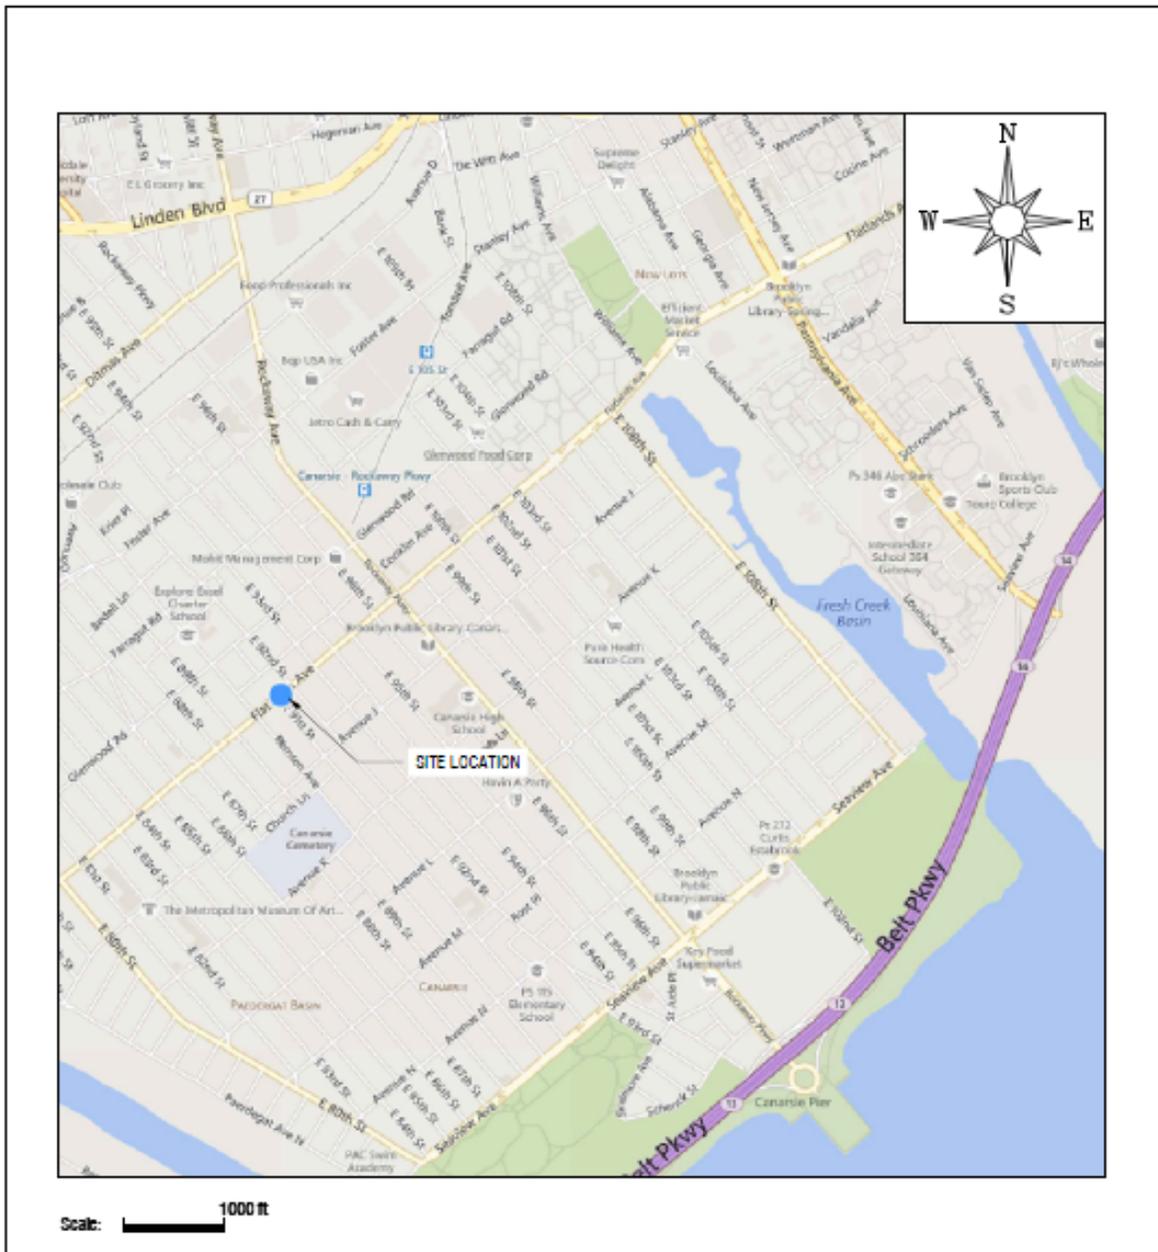

 <b>ATHENICA                  ENVIRONMENTAL                  SERVICES, INC.</b> Environmental Consultants	Drawn by: <b>ALEJANDRO MOREJON</b>	Site Plan: <b>9029 FLATLANDS AVENUE                  BROOKLYN, NY 11236</b>
	Checked by: <b>EZGI KARAYEL</b>	
	Drawing Scale: <b>AS NOTED</b>	
	Project No: <b>14-131-1168</b>	Figure: <b>1</b>
Date: <b>NOVEMBER 11, 2014</b>	Title: <b>REMEDIAL INVESTIGATION REPORT                  SITE LOCATION MAP</b>	

## **3.0**     ***KEY PERSONNEL***

The Project Manager (PM), Construction Superintendent (CS), Health & Safety Officer (HSO), and Project Safety Manager (PSM) all share responsibilities for formulating and enforcing health and safety requirements, and assuring that the CHASP is implemented as intended. This section outlines the responsibilities for each of these positions. Responsibilities for site employees and subcontractor personnel are also outlined in this section. The General Contractor and/or other authorized personnel may also be involved and identified in future CHASP documents, as appropriate.

### **3.1**     **PROJECT MANAGER (PM)**

The PM has the overall responsibility for the project and to assure that the requirements of the contract are attained in a manner consistent with the CHASP requirements. The PM will coordinate with the CS and the HSO to assure that the work is completed in a manner consistent with the HASP. The PM will supervise the allocation of resources and staffing to implement specific aspects of the HASP and may delegate authority to expedite and facilitate any application of the program. This role will be filled by the General Contractor or Excavation Subcontractor. OER will be notified in the future who the PM will be for this project.

### **3.2**     **CONSTRUCTION SUPERINTENDENT (CS)**

The CS is responsible for field implementation of the CHASP and Site Emergency Response and Contingency Plan and will act as the HSO in his/her absence. This role will be filled by the general contractor or primary subcontractor. OER will be notified in the future who the CS will be for this project.

Specific responsibilities for the CS include:

- Ensures that the CHASP is implemented;
- Ensures that field work is scheduled with adequate equipment to complete the job safely;
- Enforces site health and safety rules;
- Ensures that proper personal protective equipment is utilized;

- Ensures that the PSM is informed of project changes which require modifications to the CHASP;
- Ensures that the procedure modifications are implemented;
- Investigates incidents;
- Conducts the daily site safety briefing;
- Reports to PSM to provide summaries of field operations and progress; and
- Acts as Emergency Coordinator.

### **3.3 HEALTH AND SAFETY OFFICER (HSO)**

The HSO is authorized to administer the HASP. The HSO's primary operational responsibilities include personal and environmental monitoring, selection and monitoring of personal protective equipment, assignment of protection levels, coordination/review of work permits and observation of work activities. The HSO is authorized to stop work when an imminent health or safety risk exists. The HSO will review the essential safety requirements with all on-site personnel and will facilitate the daily safety meetings. OER will be notified in the future who the HSO will be for this project.

Specific responsibilities for HSO performance include:

- Monitoring workers for signs of stress, such as cold stress, heat stress, and fatigue. Reevaluating site conditions on an on-going basis.
- Coordinating protective measures including engineering controls, work practices and personal protective equipment.
- Assisting the CS in the preparation, presentation and documentation of daily safety meetings.
- Conducting and preparing reports of daily safety inspections of work processes, site conditions, and equipment conditions. Discussing any necessary corrective actions with the CS and reviewing new procedures.
- Initiating revisions of the CHASP as necessary for new tasks or modifications of existing operations and submitting to the Project Safety Manager for approval (see Appendix B).
- Performing air monitoring as required by the CHASP.
- Assisting the PM and CS in incident investigations.

- Preparing permits for special operations, e.g., hot work, confined spaces, line breaking, etc.
- Maintaining site safety records.
- Conducting inspections of all fire extinguishers, first-aid kits and eye washes on a regular basis.
- Informing subcontractors of the elements of the CHASP.

### **3.4 PROJECT SAFETY MANAGER (PSM)**

The Project Safety Manager (PSM) is responsible for developing/reviewing the CHASP and ensuring that it is complete and accurate. The PSM provides technical and administrative support and will be available for consultation when required. If necessary, the PSM will direct modifications (Appendix B) to specific aspects of the HASP to adjust for on-site changes that affect safety. The HSO will coordinate with the PSM on necessary modifications to the HASP. The PSM may make periodic visits to the project site to review implementation of this HASP. This role is role will be filled by the General Contractor's representative.

### **3.5 EMPLOYEE SAFETY RESPONSIBILITIES**

Each employee is responsible for personal safety as well as the safety of others in the work area and is expected to participate fully in the site safety and health program. Employees will use all equipment provided in a safe and responsible manner as directed by the CS. Employees shall report any hazardous conditions which might affect the health and safety of site personnel to the CS and/or HSO. To protect the health and safety of all personnel, site employees that knowingly disregard safety policies/procedures will be subject to removal.

Specific requirements include:

- Reading the CHASP and any amendments prior to the start of on-site work.
- Providing documentation of any applicable medical surveillance and training to the CS/HSO prior to the start of work.
- Attending the pre-entry briefing prior to beginning on-site work as well as other scheduled safety meetings.
- Asking any questions or reporting concerns regarding the content of the CHASP to the CS/HSO prior to the start of work.

- Reporting all potentially dangerous situations, incidents, injuries, and illnesses, regardless of their severity, to the CS/HSO.
- Complying with the requirements of this CHASP and the requests of the CS/HSO.

## **4.0**     *ACTIVITY HAZARD ANALYSIS*

This section outlines the potential chemical and physical hazards which workers may be exposed to during work on this project. The assessment of chemical hazards in this section is based on the results provided on the Remedial Investigation by Athenica for the Site. This is a representative list of contaminants that have been identified through extensive soil and groundwater testing at this site.

### **4.1**     **CHEMICAL HAZARDS**

Based on review of the Remedial Investigation, workers at this Site have the potential to be exposed to chemicals in soil including metals including selenium and trichloroethylene (TCE) and tetrachloroethylene (PCE) in soil vapor. All listed compounds will be considered as potential contaminants of concern.

Potential exposure to the contaminants of concern may occur during intrusive soil activities or where direct contact with the contaminated soil takes place. Metals are primarily inhalation hazards and exposure can be minimized with simple dust control measures. A summary of hazard information is listed in Table 4-1

**TABLE 4-1  
 CHEMICAL DATA**

COMPOUND	ACGIH TLV	OSHA PEL	ROUTE OF EXPOSURE	SYMPTOMS OF EXPOSURE	TARGET ORGANS	PHYSICAL DATA
Selenium	0.2 mg/m <sup>3</sup>	0.2 mg/m <sup>3</sup>	Inhalation Ingestion Skin contact	Inflammation of eyes and skin; coughing; choking; shortness of breath; death	Respiratory system, eyes, skin	Non-combustible solid

Abbreviations

ACGIH = American Conference of Governmental Industrial Hygienists

C = Ceiling Unit

CNS = Central Nervous System

CVS = Cardiovascular System

GI = Gastrointestinal

TLV = Threshold Level Value

mg/m<sup>3</sup> = milligrams per cubic meter

OSHA = Occupational Safety and Health Administration

PNS = Peripheral Nervous System

ppm = parts per million

PEL – Permissible Exposure Level

The following general symptoms may indicate exposure to a hazardous material. Personnel will be removed from the work site and provided immediate medical attention should any of the following symptoms occur:

- Dizziness or stupor
- Nausea, headaches, or cramps
- Irritation of the eyes, nose, or throat
- Euphoria
- Chest pains and coughing
- Rashes or burns

#### **4.2 PHYSICAL HAZARDS**

To minimize physical hazards, standard safety protocols will be followed at all times. Failure to follow safety protocols may result in removal of the employee from the site. All personnel shall be familiar with the physical hazards presented by each of the tasks they perform. Task specific hazard analyses are provided in Section 4.5. These hazard analyses shall be reviewed prior to beginning each task and periodically throughout the task. It must be noted that these activity hazard analyses are general in nature. It is the responsibility of the CS to revise and adapt them as necessary to reflect site-specific conditions.

The CS and HSO will observe the general work practices of each crew member and enforce safe procedures. Work areas will be inspected by the crew leaders, CS and HSO. All hazards will be corrected in a timely manner. A variety of physical hazards may be encountered during work activities at this site. Activity Hazard Analyses will be developed for each principal activity and will identify all major hazards to which employees may be exposed. Hard hats, safety glasses, and steel-toe safety boots are required in all work areas of the site. Site-specific hazards and all necessary precautions will be discussed at the daily safety meetings. The General Contractor's Safety Manual will be maintained at the project site as a reference document.

#### **4.3 ENVIRONMENTAL HAZARDS**

Environmental factors such as weather, wild animals, insects, and irritant plants may pose a hazard when performing outdoor tasks. The HSO and CS will take necessary actions to alleviate these hazards should they arise.

#### **4.3.1 Heat Stress**

The combination of warm ambient temperature and protective clothing increases the potential for heat stress. Heat stress disorders include:

- Heat rash
- Heat cramps
- Heat exhaustion
- Heat stroke

This information will be reviewed during safety meetings. Workers are encouraged to increase consumption of water and electrolyte-containing beverages, e.g. Gatorade™. Heat stress can be prevented by assuring an adequate work/rest schedule. Guidelines are presented below.

The CS and HSO will determine the specific work-rest schedule based on project specific conditions. In addition, workers are encouraged to take rests and report symptoms whenever they feel any adverse effects that may be heat-related. The frequency of breaks may need to be increased based on worker recommendation to the HSO and CS. The CS and HSO will determine the specific work-rest schedule based on project specific conditions. In addition, workers are encouraged to take rests and report symptoms whenever they feel any adverse effects that may be heat-related. The frequency of breaks may need to be increased based on worker recommendation to the HSO and CS.

Heat stress can be prevented by assuring an adequate work/rest schedule and adequate fluid consumption. A guide for work-rest schedules for various protection levels (defined in Section 5.0) is given below. The number of hours before a work-rest period is based on experience with similar work. The time periods should be considered maximum. It must also be remembered that individual physical variability and differences in physical work activities may require revisions to site plans. This table should be used as a guide. Professional judgment (evaluation of individual work load, ambient weather conditions, worker acclimatization and PPE levels) of the CS and HSO is necessary to assure a fully protective plan to prevent heat stress disorders.

<b>GUIDELINES FOR WORK-REST PERIODS FOR VARIOUS PROTECTION LEVELS (A-D) NUMBER OF HOURS BEFORE REST PERIOD</b>				
<b>Temperature</b>	<b>Level D</b>	<b>Level C</b>	<b>Level B</b>	<b>Level A</b>
90+ F*	2.0	1.5	1.0	0.5
87.5 F	2.5	2.0	1.5	1.0
82.5 F	3.0	2.5	2.0	1.5
77.5 F	3.5	3.0	2.5	1.5
72.5	4.0	3.5	2.5	1.5

*\*Work above 100 F will be reviewed with the Project Safety Manager to determine specific requirements.*

Alternately the work/rest schedule can be calculated based on heat stress monitoring results. Monitoring consists of taking the radial pulse of a worker for 30 seconds immediately after exiting the work area. The frequency of monitoring is described below.

If the heart rate exceeds 110 beats per minute at the beginning of the rest period, shorten the next work cycle by 1/3 and keep the rest period the same. If the heart rate still exceeds 110 beats per minute at the next rest period, increase the following rest period by 1/3. The initial rest period should be at least 5 minutes.

Body temperature, measured orally or through the ear canal, may also be monitored to assess heat stress. Workers should not be permitted to continue work when their body temperature exceeds 100.4 F (38C). Monitoring should be conducted at the beginning of each break period as noted above.

Monitoring for heat stress will begin when the ambient temperature reaches or exceeds 72.5 degrees Fahrenheit when wearing chemical protective clothing (Level C, B, A), or 80 degrees Fahrenheit for site activities performed with no chemical protective clothing (Level D). Monitoring should include pulse rate, weight loss, oral/ or ear canal temperature, signs and symptoms of heat stress and fluid intake.

An additional measure that can be employed to minimize heat stress is through the utilization of Heat Stress Relief Stations. A Heat Stress Relief Station (HSRS) is a location inside the exclusion zone where workers can partially remove their personal protective equipment, rest and take in fluids. Since the HSRS is established inside the exclusion zone, it is imperative that its use be closely monitored and controlled to ensure that workers do not ingest contamination during use.

The following is a detailed description of the Heat Stress Relief Station:

- Location - The HSRS should be located in an area of the exclusion zone where it will be predominantly upwind of site activities. This can typically be adjacent to the contamination reduction zone.
- Delineation - The HSRS must be separated from the exclusion zone by temporary fencing and must be labeled as “Heat Stress Relief Station”.
- Elements - The HSRS contains several elements:
  - A tarp or tent for shade;
  - A bench or chairs for workers to sit on;
  - A wash station;
  - A table for fluids, cups and clean personal protective equipment (PPE); and
  - A trash can for contaminated PPE.
- Set-Up- Proper set up of the HSRS is imperative its successful use.
  - In the Support Zone, prepare the water cooler with ice and water or Gatorade.
  - The person bringing the items to the HSRS must don the appropriate PPE required for the Exclusion Zone.
  - Bring the following items to the HSRS:
    - Cooler;
    - Clean disposable cups;
    - Disinfectant wipes;
    - A clean trash bag;
    - Surgical gloves; and
    - Duct tape.
  - Ensure the wash station has clean water and paper towels for drying hands/face.
- Procedure for Use- In order for the HSRS to be effective, it must be properly used. It is imperative that workers decontaminate properly before drinking fluids so that ingestion of site contaminants does not take place. The following are the steps to properly use the HSRS:
  - Upon entering the HSRS:
    - If wearing a Tyvek, remove duct tape on wrists and unzip and tie around waist;

- Remove your outer gloves and surgical gloves; set outer gloves aside and throw surgical gloves into trash;
- Wash hands and/or face at Wash Station;
- Use disinfectant wipe on hands;
- Get drink and/or rest on bench/chair.
- Before re-entering the Exclusion Zone:
  - Dispose of cups in trash;
  - Put on a clean pair of surgical gloves;
  - If wearing a Tyvek, pull up and rezip;
  - Re-apply duct tape to wrists;
  - Put on outer gloves.
- Monitoring- The CS and HSO are both responsible for monitoring the use of the Heat Stress Relief Station. The HSO should review the procedures for use of the HSRS with the workers before its use begins to ensure that everyone understands the parameters for proper use.

#### 4.3.2 *Exposure to Cold*

With outdoor work in the winter months, the potential exists for hypothermia and frostbite. Several forms of cold stress as well as preventative measures are described in this section of the HASP.

##### 4.3.2.1 *Cold Stress Conditions and Symptoms*

Typical cold stress conditions are included in the tables below, including symptoms and first aid precautions. If cold stress conditions develop, professional medical attention will be sought.

<b>TABLE 4.3.2A COLD WEATHER INJURIES</b>		
<b>Cause</b>	<b>Symptoms</b>	<b>First Aid</b>
<b>Frostbite</b>		
Freezing of tissue, normally due to exposure below 32°F	Numbness in affected area. Tingling, blistered, swollen or tender areas. Pale, yellowish waxy-looking skin.	Warm affected area with direct body heat. Consult with medical personnel ASAP. <b>Do not</b> thaw frozen area if treatment will be

<b>TABLE 4.3.2A COLD WEATHER INJURIES</b>		
<b>Cause</b>	<b>Symptoms</b>	<b>First Aid</b>
		delayed. <b>Do not</b> massage or rub affected area. <b>Do not</b> wet area or rub with snow or ice.
<b>Chilblain</b>		
Repeated exposure of bare skin for prolonged periods to temperatures 20° to 60°F (for those not acclimated to cold weather).	Swollen, red skin. Tender, hot skin, usually accompanied by itching.	Warm affected area with direct body heat. <b>Do not</b> massage or rub. <b>Do not</b> wet area or rub with snow or ice. Do not expose affected area to open fire, stove or any other intense heat source.
<b>Immersion Foot (Trench Foot)</b>		
Prolonged exposure of the feet to wet conditions at temperatures between 32° to 50°F. Inactivity and damp socks (or tightly laced boots that impair circulation) speed onset and severity.	Cold numb feet may progress to hot with shooting pains. Swelling redness and bleeding.	Rewarm feet by exposing them to warm air. Evacuate victim to a medical facility. <b>Do not</b> massage, rub, moisten or expose affected area to extreme heat source.
<b>Dehydration</b>		
Depletion of body fluids.	Dizziness. Weakness.	Replace lost water. Water should be sipped not gulped. Get medical treatment.
<b>Hypothermia</b>		
Prolonged cold exposure and body heat loss. May occur at well above freezing, especially when a person is immersed in water.	Lack of shivering. Drowsiness, mental slowness, lack of coordination. Can progress to unconsciousness, irregular heartbeat and death.	Strip off clothing and wrap victim in blankets or a sleeping bag. Get victim to a heated location and medical treatment as soon as possible.

In cold weather, the potential for frostbite exists, especially in body extremities. Personnel will be instructed to pay particular attention to hands, feet, and any exposed skin when dressing. Personnel will be advised to obtain more clothing if they begin to experience loss of sensation due to cold exposure.

#### **4.3.2.2 Monitoring and Preventative Actions**

Typical cold stress monitoring procedures are included in the tables below, including temperatures to initiate monitoring, protective clothing uses and administrative practices to prevent or reduce the potential for cold stress related injury/illness. For weather conditions

below -43 °C or -45 °F with no wind and/or similar conditions (see Work/Warm-up Table) all work will cease.

<b>TABLE 4.3.2B COLD STRESS PREVENTION*</b>		
	<b>Temperature</b>	<b>Preventative Action</b>
1	<61°F	Use thermometer to measure ambient temperature.
2	<40°F	Cold weather protective clothing available; check core body temperature at breaks using oral or ear canal thermometer. Maintain core body temperature above 96.8°F to avoid hypothermia.
3	<30°F	Record ambient temperature and wind speed every 4 hours; compare to wind chill chart when below 19.4°F.
4	<19°F	Provide and use heated warming shelters for work breaks and when cold stress symptoms appear.
5	<10°F	Constant observation of workers, i.e. “buddy system”; rest in heated shelters (see work-rest schedule); dry clothing available for change-out; acclimate new workers.
6	<0°F/ >5 mph winds	Obtain medical certification for workers subject to hypothermia risk.

\* Based on “2009 ACGIH Threshold Limit Values... for Physical Agents.”

Note: refer to wind-chill and work-warmup charts in Table 4.3.2E

<b>TABLE 4.3.2C COLD WEATHER CLOTHING REQUIREMENTS</b>	
1	If wind chill is a factor at a work location, the cooling effect of the wind shall be reduced by shielding the work area or providing employees an outer windbreak layer garment.
2	Extremities, ears, toes, and nose shall be protected from extreme cold by protective clothing.
3	Employees performing light work whose clothing may become wet shall wear an outer layer of clothing which is impermeable to water.
4	Employees performing moderate to heavy work whose clothing may become wet shall wear an outer layer of clothing which is impermeable to water.
5	Outer garments must provide for ventilation to prevent wetting of inner clothing by sweat, or if not possible, a heated shelter for warming/drying clothing, or a change of clothing, shall be provided prior to returning to work in a cold environment.

Protective clothing greatly reduces the possibility of hypothermia in workers. However, personnel will be instructed to wear warm clothing and to stop work to obtain more clothing if they become too cold. Employees will also be advised to change into dry clothes if their clothing becomes wet from perspiration or from exposure to precipitation.

Employees will be instructed to use heated shelters on site, at regular intervals, depending upon the severity of ambient temperatures. Symptoms of cold stress, including heavy shivering, excessive fatigue, drowsiness, irritability, or euphoria necessitate immediate return to the shelter.

<b>TABLE 4.3.2D</b>												
<b>COOLING POWER OF WIND ON EXPOSED FLESH EXPRESSED AS EQUIVALENT TEMPERATURE (under calm conditions)*</b>												
<b>Actual Temperature Reading ( F)</b>												
<b>Estimated Wind Speed (in MPH)</b>	50	40	30	20	10	0	-10	-20	-30	-40	-50	-60
<b>Equivalent Chill Temperature (F)</b>												
Calm	50	40	30	20	10	0	-10	-20	-30	-40	-50	-60
5	48	37	27	16	6	-5	-15	-26	-36	-47	-57	-68
10	40	28	16	4	-9	-24	-33	-46	-58	-70	-83	-95
15	36	22	9	-5	-18	-32	-45	-58	-72	-85	-99	-112
20	32	18	4	-10	-25	-39	-53	-67	-82	-96	-110	-121
25	30	16	0	-15	-29	-44	-59	-74	-88	-104	-118	-133
30	28	13	-2	-18	-33	-48	-63	-79	-94	-109	-125	-140
35	27	11	-4	-20	-35	-51	-67	-82	-98	-113	-129	-145
40	26	10	-6	-21	-37	-53	-69	-85	-100	-116	-132	-148
(Wind Speeds greater than 40 mph have little additional effect.)	<b>Little Danger</b> In < hr with dry skin. Maximum danger of false sense of security			<b>Increasing Danger</b> Danger of freezing of exposed flesh within one minute.				<b>Great Danger</b> Flesh may freeze within 30 seconds.				
Trench foot and immersion foot may occur at any point on this chart.												

\*Developed by U.S. Army Research Institute of Environmental Medicine, Natick, MA. (Shaded area) Equivalent chill temperature requiring dry clothing to maintain core body temperature above 36 C (98.6 F) per cold stress TLV.

<b>TABLE 4.3.2E</b>										
<b>TLV WORK/WARM-UP SCHEDULE FOR FOUR-HOUR SHIFT*</b>										
<b>Air Temperature – Sunny Sky</b>	<b>No Noticeable Wind</b>		<b>5 mph wind</b>		<b>10 mph wind</b>		<b>15 mph wind</b>		<b>20 mph wind</b>	
	<b>Max. Work Period</b>	<b>No. of Breaks</b>	<b>Max. Work Period</b>	<b>No. of Breaks</b>	<b>Max. Work Period</b>	<b>No. of Breaks</b>	<b>Max. Work Period</b>	<b>No. of Breaks</b>	<b>Max. Work Period</b>	<b>No. of Breaks</b>
<b>C (appx.) F (appx.)</b>										
-26 to -28 -15 to -19	Normal	1	Normal	1	75 min	2	55 min	3	40 min	4
-29 to -31 -20 to -24	Normal	1	75 min	2	55 min	3	40 min	4	30 min	5
-32 to -34 -25 to -29	75 min	2	55 min	3	40 min	4	30 min	5	Non-Emergency work should cease	
-35 to -37 -30 to -34	55 min	3	40 min	4	30 min	5	Non-emergency work should cease		work should cease	
-38 to -39 -35 to -39	40 min	4	30 min	5	Non-emergency		work should cease			

<b>TABLE 4.3.2E TLV WORK/WARM-UP SCHEDULE FOR FOUR-HOUR SHIFT*</b>										
<b>Air Temperature – Sunny Sky</b>	<b>No Noticeable Wind</b>		<b>5 mph wind</b>		<b>10 mph wind</b>		<b>15 mph wind</b>		<b>20 mph wind</b>	
	<b>Max. Work Perio d</b>	<b>No. of Brea ks</b>	<b>Max. Work Perio d</b>	<b>No. of Brea ks</b>	<b>Max. Work Perio d</b>	<b>No. of Brea ks</b>	<b>Max. Work Perio d</b>	<b>No. of Brea ks</b>	<b>Max. Work Perio d</b>	<b>No. of Brea ks</b>
<b>C (appx.) F (appx.)</b>										
-40 to – 42 < -43	-40 to -44 < -45	30 min	5	Non- emergency work should cease	work should cease					

\* Adapted from Occupational Health and Safety Division, Saskatchewan Department of Labor

### **4.3.3 Biological Hazards**

The contractor will be required to monitor and control insects, rodents, and other pests identified on site. Standing water will not be allowed on-site, in an effort to control insects. Pest control procedures used by the contractor will include bait, trap, spray, or other means to abate pest problems that develop on site during disruption activities.

### **4.3.4 Noise**

Hearing protection is required for workers operating or working near heavy equipment, where the noise level is greater than 85 dbA (Time Weighted Average) as well as personnel working around heavy equipment. The HSO will determine the need and appropriate testing procedures, (i.e., sound level meter and/or dosimeter) for noise measurement. The provisions for noise protection for workers are presented in other safety-related documents for the Site.

## **4.4 VEHICLE AND HEAVY EQUIPMENT SAFETY**

### **4.4.1 Vehicle Safety**

Motor vehicle incidents are the number one cause of occupational fatalities, accounting for one in three deaths. The safety provisions for vehicle use at the Site are presented in other safety-related documents for the Site.

#### **4.4.2 *Heavy Equipment Safety***

The use of backhoes, front-end loaders, etc. for excavation and other material handling equipment will present various physical hazards. The safety provisions for heavy equipment use at the Site are presented on other safety-related documents for the Site.

#### **4.5 TASK-SPECIFIC ACTIVITY HAZARD ANALYSES (AHA)**

This section of the HASP provides a breakdown of the hazards and control measures for each principal task. These Activity Hazard Analyses (AHAs) are general in nature and must be made project specific by the Construction Superintendent prior to each task. The AHAs will be field checked by the supervisor on an ongoing basis and revised as necessary. All revisions will be communicated to the work crew.

<b>Project Identification</b> 9029 Flatlands Avenue	<b>Location</b> Brooklyn, NY	<b>Estimated Dates</b> January – April 2015
<b>Phase of Work</b> Mobilization/ Demobilization		<b>Analysis Approved by</b> Spiro Dongaris
<b>TASKS</b>	<b>HAZARDS</b>	<b>CONTROL MEASURES</b>
1. Mobilization and demobilization of equipment site tools, personnel.	Slips/trips/falls	<ul style="list-style-type: none"> <li>• Maintain alertness to slip/trip/fall hazards</li> <li>• Maintain good housekeeping</li> <li>• Walk, do not run</li> <li>• Wear footwear with soles that grip</li> </ul>
2. Set up/remove staging and decontamination areas.	Manual lifting/ material handling	<ul style="list-style-type: none"> <li>• Observe proper lifting techniques</li> <li>• Obey sensible lifting limits (50 lb. maximum per person manual lifting)</li> <li>• Use mechanical lifting equipment (hand carts, trucks) to move large, awkward loads</li> </ul>
	Temperature extremes	<ul style="list-style-type: none"> <li>• Drink plenty of fluids</li> <li>• Train personnel of signs/symptoms of cold/heat stress</li> <li>• Monitor air temperatures when extreme weather conditions are present</li> <li>• Stay in visual and verbal contact with your buddy</li> </ul>
	Hand tool usage	<ul style="list-style-type: none"> <li>• Daily inspections will be performed</li> <li>• Remove broken or damaged tools from service</li> <li>• Use the tool for its intended purpose</li> <li>• Use in accordance with manufacturer instructions.</li> </ul>
	Biological hazards	<ul style="list-style-type: none"> <li>• Be alert to the presence of biological hazards</li> <li>• Wear insect repellent</li> <li>• CS/HSO should be aware of on-site personnel with allergic reactions in insect bites and stings.</li> </ul>

<b>Project Identification</b> 9029 Flatlands Avenue	<b>Location</b> Brooklyn, NY	<b>Estimated Dates</b> January – April 2015
<b>Phase of Work</b> Mobilization/ Demobilization		<b>Analysis Approved by</b> Spiro Dongaris
<b>TASKS</b>	<b>HAZARDS</b>	<b>CONTROL MEASURES</b>
1. Trenching and excavation. 2. Install shoring/ sheeting protective system.	Chemical hazards	<ul style="list-style-type: none"> <li>• Wear appropriate PPE per Section 5.1</li> <li>• Practice contamination avoidance</li> <li>• Conduct real-time air monitoring per section 7.1.1</li> <li>• Follow proper decontamination procedures</li> <li>• Wash hands/face before eating, drinking, smoking</li> </ul>
	Cave-in	<ul style="list-style-type: none"> <li>• Do not allow entry into the trench unless approved protective system is in place and has been inspected by the competent person.</li> <li>• Follow OSHA excavation regulations</li> <li>• Place ladder or entry device every 25 feet of lateral travel</li> </ul>
	Struck By/ Against Motor Vehicles/ Operating Equipment	<ul style="list-style-type: none"> <li>• Wear reflective warning vests when exposed to vehicular traffic</li> <li>• Isolate potential equipment swing areas</li> <li>• Make eye contact with vehicle operators before approaching/crossing high traffic areas</li> <li>• Understand and review hand signals</li> <li>• Use a spotter to direct equipment movement in high traffic areas</li> <li>• Audible back-up alarms on equipment</li> <li>• Operator inspects equipment daily for safety defects, including the braking system</li> </ul>
	Slips/trips/falls	<ul style="list-style-type: none"> <li>• Clear walkways, work areas of equipment and tools</li> <li>• Mark, identify, or barricade other obstructions</li> <li>• Use barricades or fencing for trenches greater than 6 feet deep</li> <li>• Maintain alertness to slip/trip/fall hazards</li> <li>• Maintain good housekeeping</li> <li>• Walk, do not run</li> <li>• Wear footwear with soles that grip</li> </ul>
	Electrical hazards	<ul style="list-style-type: none"> <li>• Maintain 10 foot minimum clearance to any overhead power lines</li> <li>• Call for Utility mark out prior to digging</li> </ul>

<b>Project Identification</b> 9029 Flatlands Avenue	<b>Location</b> Brooklyn, NY	<b>Estimated Dates</b> January – April 2015
<b>Phase of Work</b> Mobilization/ Demobilization		<b>Analysis Approved by</b> Spiro Dongaris
<b>TASKS</b>	<b>HAZARDS</b>	<b>CONTROL MEASURES</b>
1. Trenching and excavation. 2. Install shoring/ sheeting protective system.	Hand and power tool usage	<ul style="list-style-type: none"> <li>• Daily inspections will be performed on tools and cords</li> <li>• Ensure all guards are in place</li> <li>• Remove broken or damaged tools from service</li> <li>• Use the tool for its intended purpose</li> <li>• Use in accordance with manufacturer instructions</li> </ul>
	Noise	<ul style="list-style-type: none"> <li>• Hearing protection mandatory at or above 85 dBA.</li> <li>• Instruct personnel how to properly wear hearing protective devices.</li> <li>• Disposable ear plugs or other hearing protection required while around noisy equipment.</li> </ul>
	Manual lifting/ Material handling	<ul style="list-style-type: none"> <li>• Observe proper lifting techniques</li> <li>• Obey sensible lifting limits (50 lb. maximum per person manual lifting)</li> <li>• Use mechanical lifting equipment (hand carts, trucks) to move large, awkward loads</li> </ul>
	Temperature extremes.	<ul style="list-style-type: none"> <li>• Drink plenty of fluids:</li> <li>• Train personnel of signs/symptoms of cold/heat stress;</li> <li>• Monitor air temperatures when extreme weather conditions are present;</li> <li>• Stay in visual and verbal contact with your buddy; and</li> <li>• Use procedures in Sections 3.3.1 and 3.3.2</li> </ul>

<b>Project Identification</b> 9029 Flatlands Avenue	<b>Location</b> Brooklyn, NY	<b>Estimated Dates</b> January – April 2015
<b>Phase of Work</b> Mobilization/ Demobilization		<b>Analysis Approved by</b> Spiro Dongaris
<b>TASKS</b>	<b>HAZARDS</b>	<b>CONTROL MEASURES</b>
1. Load trucks with contaminated soils. 2. Cover and clean trucks.	Chemical hazards	<ul style="list-style-type: none"> <li>• Wear appropriate PPE per Section 6.1</li> <li>• Practice contamination avoidance</li> <li>• Conduct real-time air monitoring per section 8.1.1</li> <li>• Follow proper decontamination procedures</li> <li>• Wash hands/face before eating, drinking, smoking</li> </ul>
	Struck By/ Against Motor Vehicles/ Operating Equipment	<ul style="list-style-type: none"> <li>• Wear reflective warning vests when exposed to vehicular traffic</li> <li>• Isolate potential equipment swing areas</li> <li>• Make eye contact with vehicle operators before approaching/crossing high traffic areas</li> <li>• Understand and review hand signals</li> <li>• Use a spotter to direct equipment movement in high traffic areas</li> <li>• Audible back-up alarms on equipment</li> <li>• Operator inspects equipment daily for safety defects, including the braking system</li> </ul>
	Slips/trips/falls	<ul style="list-style-type: none"> <li>• Maintain alertness to slip/trip/fall hazards</li> <li>• Maintain good housekeeping</li> <li>• Walk, do not run</li> <li>• Wear footwear with soles that grip</li> </ul>
	Manual lifting/ material handling	<ul style="list-style-type: none"> <li>• Observe proper lifting techniques</li> <li>• Obey sensible lifting limits (50 lb. maximum per person manual lifting)</li> <li>• Use mechanical lifting equipment (hand carts, trucks) to move large, awkward loads</li> </ul>
	Temperature extremes	<ul style="list-style-type: none"> <li>• Drink plenty of fluids</li> <li>• Train personnel of signs/symptoms of cold/heat stress</li> <li>• Monitor air temperatures when extreme weather conditions are present</li> <li>• Stay in visual and verbal contact with your buddy</li> <li>• Use procedures in Sections 4.3.1 and 4.3.2</li> </ul>

<b>Project Identification</b> 9029 Flatlands Avenue	<b>Location</b> Brooklyn, NY	<b>Estimated Dates</b> January – April 2015
<b>Phase of Work</b> Mobilization/ Demobilization		<b>Analysis Approved by</b> Spiro Dongaris
<b>TASKS</b>	<b>HAZARDS</b>	<b>CONTROL MEASURES</b>
	Noise	<ul style="list-style-type: none"> <li>Hearing protection mandatory at or above 85 dBA.</li> <li>Instruct personnel how to properly wear hearing protective devices.</li> <li>Disposable ear plugs or other hearing protection required while around noisy equipment.</li> </ul>
1. Build forms. 2. Pour concrete. Remove forms.	Chemical hazards	<ul style="list-style-type: none"> <li>Wear appropriate PPE per Section 6.1</li> <li>Practice contamination avoidance</li> <li>Conduct real-time air monitoring per section 8.1.1</li> <li>Follow proper decontamination procedures</li> <li>Wash hands/face before eating, drinking, smoking</li> </ul>
	Struck By/ Against Motor Vehicles/ Operating Equipment	<ul style="list-style-type: none"> <li>Wear reflective warning vests when exposed to vehicular traffic</li> <li>Isolate potential equipment swing areas</li> <li>Make eye contact with vehicle operators before approaching/crossing high traffic areas</li> <li>Understand and review hand signals</li> <li>Use a spotter to direct equipment movement in high traffic areas</li> <li>Audible back-up alarms on equipment</li> <li>Operator inspects equipment daily for safety defects, including the braking system</li> </ul>
3.	Concrete pumper	<ul style="list-style-type: none"> <li>Make sure nozzle man has eye contact with pump truck operator.</li> <li>Ensure steady control over nozzle</li> </ul>
	Splashing concrete	<ul style="list-style-type: none"> <li>Ensure eye protection is worn and other PPE as required by Section 6.1</li> <li>A portable eyewash will be maintained in the work area</li> </ul>
	Falls from heights	<ul style="list-style-type: none"> <li>Fall protection is required over 6 feet when removing forms</li> <li>Use PFAS where needed</li> <li>OSHA required training before use of PFAS, scaffold or lift</li> <li>Competent person inspects PFAS and scaffold</li> </ul>

<b>Project Identification</b> 9029 Flatlands Avenue	<b>Location</b> Brooklyn, NY	<b>Estimated Dates</b> January – April 2015
<b>Phase of Work</b> Mobilization/ Demobilization		<b>Analysis Approved by</b> Spiro Dongaris
<b>TASKS</b>	<b>HAZARDS</b>	<b>CONTROL MEASURES</b>
	Sharp Objects	<ul style="list-style-type: none"> <li>• Wear cut resistant work gloves when the possibility of lacerations or other injury may be caused by sharp edges or objects being handled</li> <li>• Maintain all hand and power tools in a safe condition</li> <li>• Keep guards in place during use</li> </ul>
<ol style="list-style-type: none"> <li>1. Build forms.</li> <li>2. Pour concrete.</li> <li>3. Remove forms.</li> </ol>	Hand and power tool usage	<ul style="list-style-type: none"> <li>• Daily inspections will be performed on tools and cords</li> <li>• Ensure all guards are in place</li> <li>• Remove broken or damaged tools from service</li> <li>• Use the tool for its intended purpose</li> <li>• Use in accordance with manufacturer instructions</li> </ul>
	Noise	<ul style="list-style-type: none"> <li>• Hearing protection mandatory at or above 85 dBA.</li> <li>• Instruct personnel how to properly wear hearing protective devices.</li> <li>• Disposable ear plugs or other hearing protection required while around noisy equipment.</li> </ul>
	Manual lifting/ material handling	<ul style="list-style-type: none"> <li>• Observe proper lifting techniques</li> <li>• Obey sensible lifting limits (50 lb. maximum per person manual lifting)</li> <li>• Use mechanical lifting equipment (hand carts, trucks) to move large, awkward loads</li> </ul>
	Slips/trips/falls	<ul style="list-style-type: none"> <li>• Maintain alertness to slip/trip/fall hazards</li> <li>• Maintain good housekeeping</li> <li>• Walk, do not run</li> <li>• Wear footwear with soles that grip</li> </ul>
	Temperature extremes.	<ul style="list-style-type: none"> <li>• Drink plenty of fluids:</li> <li>• Train personnel of signs/symptoms of cold/heat stress;</li> <li>• Monitor air temperatures when extreme weather conditions are present;</li> <li>• Stay in visual and verbal contact with your buddy; and</li> <li>• Use procedures in Sections 4.3.1 and 4.3.2</li> </ul>

<b>Project Identification</b> 9029 Flatlands Avenue	<b>Location</b> Brooklyn, NY	<b>Estimated Dates</b> January – April 2015
<b>Phase of Work</b> Mobilization/ Demobilization		<b>Analysis Approved by</b> Spiro Dongaris
<b>TASKS</b>	<b>HAZARDS</b>	<b>CONTROL MEASURES</b>
1. Pressure wash or steam clean heavy equipment and vehicles.	Chemical hazards	<ul style="list-style-type: none"> <li>• Wear appropriate PPE per Section 6.1</li> <li>• Practice contamination avoidance</li> <li>• Conduct real-time air monitoring per section 8.1.1</li> <li>• Follow proper decontamination procedures</li> <li>• Wash hands/face before eating, drinking, smoking</li> </ul>
	Struck By/ Against Motor Vehicles/ Operating Equipment	<ul style="list-style-type: none"> <li>• Wear reflective warning vests when exposed to vehicular traffic</li> <li>• Isolate potential equipment swing areas</li> <li>• Make eye contact with vehicle operators before approaching/crossing high traffic areas</li> <li>• Understand and review hand signals</li> <li>• Use a spotter to direct equipment movement in high traffic areas</li> <li>• Audible back-up alarms on equipment</li> <li>• Operator inspects equipment daily for safety defects, including the braking system</li> </ul>
	Steam/heat/splashing	<ul style="list-style-type: none"> <li>• Wear face shield + safety glasses</li> <li>• Stay out of splash radius to minimize exposure</li> <li>• Do not direct steam/spray at anyone</li> </ul>
	Hand and power tool usage	<ul style="list-style-type: none"> <li>• Daily inspections will be performed on tools and cords</li> <li>• Ensure all guards are in place</li> <li>• Remove broken or damaged tools from service</li> <li>• Use the tool for its intended purpose</li> <li>• Use in accordance with manufacturer instructions</li> </ul>
	Slips/trips/falls	<ul style="list-style-type: none"> <li>• Maintain alertness to slip/trip/fall hazards</li> <li>• Maintain good housekeeping</li> <li>• Walk, do not run</li> <li>• Wear footwear with soles that grip</li> </ul>
	Temperature extremes	<ul style="list-style-type: none"> <li>• Drink plenty of fluids</li> <li>• Train personnel of signs/symptoms of cold/heat stress</li> <li>• Monitor air temperatures when extreme weather conditions are present</li> <li>• Stay in visual and verbal contact with your buddy</li> <li>• Use procedures in Sections 4.3.1 and 4.3.2</li> </ul>

## **5.0**      *WORK AND SUPPORT AREAS*

To prevent migration of contamination from personnel and equipment, work areas will be clearly specified as designated below prior to beginning operations. Each work area will be clearly identified using signs or physical barriers.

### **5.1**      **EXCLUSION ZONE (EZ)**

The EZ is the area suspected of contamination and presents the greatest potential for worker exposure. Personnel entering the area must wear the mandated level of protection for that area. In certain instances, different levels of protection will be required depending on the tasks and monitoring performed within that zone. The EZ for this project will include the excavation areas, any stockpiling/staging areas, and areas where disturbance of urban fill is likely occurring.

### **5.2**      **CONTAMINATION - REDUCTION ZONE (CRZ)**

The CRZ or transition zone will be established between the EZ and support zone (SZ). In this area, personnel will begin the sequential decontamination process required to exit the EZ. To prevent off-site migration of contamination and for personnel accountability, all personnel will enter and exit the EZ through the CRZ. The CRZ for this project will be the access/egress routes to/from the EZ and the personnel and equipment decontamination stations.

### **5.3**      **SUPPORT ZONE (SZ)**

The SZ serves as a clean, control area. Operational support facilities are located within the SZ. Normal work clothing and support equipment are appropriate in this zone. Contaminated equipment or clothing will not be allowed in the SZ. There will be a clearly marked controlled access point from the SZ into the CRZ and EZ that is monitored closely by the HSO and the CS to ensure proper safety protocols are followed. The SZ will be any office areas/trailers and the parking and visitor access ways to the project site.

### **5.4**      **SITE CONTROL LOG**

A log of all personnel visiting, entering or working on the site shall be maintained in the main office location. The log will record the date, name, company or agency, and time entering or exiting the site.

No visitor will be allowed in the EZ without showing proof of training and compliance with applicable medical monitoring requirements. Visitors will supply their own protective equipment, including hard hat, boots and respiratory equipment, if required. Visitors will attend a site orientation given by the HSO and sign the HASP.

## **5.5 GENERAL**

The following items are requirements to protect the health and safety of workers and will be discussed in the safety briefing prior to initiating work on the site.

- Eating, drinking, chewing gum or tobacco, smoking, or any practice that increases the probability of hand to mouth transfer and ingestion of contamination is prohibited in the EZ and CRZs.
- Hands and face must be washed upon leaving the EZ and before eating, drinking, chewing gum or tobacco and smoking or other activities which may result in ingestion of contamination.
- During site operations, each worker will consider himself as a safety backup to his partner. All personnel will be aware of dangerous situations that may develop.
- Visual contact will be maintained between workers on site when performing hazardous duties.
- No personnel will be admitted to the site without the proper safety equipment, training, and medical surveillance certification.
- All personnel must comply with established safety procedures. Any site personnel, who do not comply with safety policy, as established by the HSO or the CS, will be dismissed from the site.
- Proper decontamination procedures must be followed before leaving the site.
- All site workers are authorized to stop work if they observe unsafe actions of workers or other unsafe conditions on site which may cause an imminent danger.
- All workers and visitors must sign in and out of the site.

## 6.0 *PROTECTIVE EQUIPMENT*

This section specifies the levels of personal protective equipment (PPE) which are or may be required for each principal activity performed at this site. All site personnel must be trained in the use of all PPE utilized.

### 6.1 ANTICIPATED PROTECTION LEVELS

The following protection levels have been established for the site work activities based on site information concerning the levels of contaminants and the scope of work. Results of site air monitoring and visual inspection of the work activities may indicate the need for changes in final PPE level(s). Changes in the initial PPE Levels prescribed in the Table below require completion of the HASP amendment form in Appendix B.

<b>Task</b>	<b>Initial PPE Level</b>	<b>Upgrade/Downgrade PPE Level</b>	<b>Skin Protection</b>	<b>Respiratory Protection</b>	<b>Other PPE</b>
General Support Zone Activities	Level D	—	Generally none	None	Hard-hat, Steel-toe work boots, safety glasses, safety vests. Leather work gloves as needed. Hearing protection when >85 dBA.
Mobilization/Demobilization	Level D	—	Generally none	None	Hard-hat, Steel-toe work boots, safety glasses, safety vests. Leather work gloves as needed. Hearing protection when >85 dBA.
Excavation, Loading of Trucks with Contaminated Soil/Fill, Equipment Decontamination	Level D		Generally none,	Initial: None (See Section 7)	Hard-hat, Steel-toe work boots, safety glasses, leather work gloves for material handling, hearing protection >85 dBA

## **6.2 PROTECTION LEVEL DESCRIPTIONS**

This section lists the minimum requirements for each protection level. Modification to these requirements may have been noted in the Table shown above.

### **6.2.1 *Level D***

Level D consists of the following:

- Safety glasses with side shields
- Hard hat
- Steel-toed work boots
- Work clothing as prescribed by weather
- Leather work gloves when material handling

## **7.0**     ***DECONTAMINATION PROCEDURES***

This section describes the procedures necessary to ensure that both personnel and equipment are free from contamination when they leave the work site.

### **7.1**     **PERSONNEL DECONTAMINATION**

Decontamination procedures will ensure that material which workers may have contacted in the EZ does not result in personal exposure and is not spread to clean areas of the site. This sequence describes the general decontamination procedures for Level D. The specific stages will vary depending on the site, the task, the protection level, etc. Dry decontamination may be used if there is insufficient space to support a full decontamination station as delineated with the steps below and approved by the HSO. The CS and the HSO will ensure that the decontamination procedures are adequate.

#### ***Level D Decontamination***

1. Go to end of EZ
2. Cross into CRZ
3. Wash face and hands

#### **7.1.1**   ***Suspected Contamination***

Any employee suspected of sustaining skin contact with chemical materials will first use the emergency shower. Following a thorough drenching, the worker will proceed to the decontamination area. Here the worker will remove clothing and don clean clothing. Medical attention will be provided as determined by the degree of injury.

#### **7.1.2**   ***Personal Hygiene***

Personnel will wash hands, arms, neck and face, following decontamination and before any eating, smoking, or drinking.

### **7.2**     **EQUIPMENT DECONTAMINATION**

Heavy equipment and other vehicles operated within the EZ will be decontaminated before being removed from the site. Workers operating the equipment/vehicles will move the equipment

to a gross decontamination location near the exit of the EZ. Following gross decontamination the equipment/vehicle will be moved to the decontamination pad. Equipment decontamination will be performed on the pad until the equipment is visually clean. Following decontamination activities equipment will be inspected by the HSO or CS prior to leaving the site. Once the equipment is inspected it will be removed from the site.

#### Heavy Equipment / Vehicle Decontamination

1. Equipment operator will move the heavy equipment / vehicle to a position near the EZ / CRZ interchange
2. Worker will use manual equipment (shovel, track spade) to remove gross contamination from tracks, bucket, dump box, and vehicle undercarriage (as required)
3. Following removal of gross decontamination equipment will be moved onto the decontamination pad and pressure washed / steam cleaned until equipment / vehicle is visually clean.
4. Equipment / vehicle decontaminated for removal from the site will be moved to a clean area for the HSO / CS inspection.
5. Once the equipment / vehicle is inspected and approved it will be removed from the site. Vehicles that fail inspection will be returned to the decontamination pad for further cleaning and re-inspected.

### **7.3 DISPOSAL OF WASTES**

Wastes will be disposed according to applicable Local, State and Federal regulations.

### **7.4 DUST /EROSION CONTROL**

The contractor will control dust and implement erosion control measures to be protective of nearby ecologically sensitive areas and sensitive receptors.

## **8.0**     ***AIR MONITORING***

Air monitoring will be conducted in order to characterize personnel exposures and fugitive emissions from site contaminants. Principal contaminants of concern are listed in Section 4.0 of this HASP. The target compounds selected for air monitoring purposes for this site include particulates. Results of air monitoring will be used to ensure the proper selection of protective clothing and equipment, including respiratory protection, to protect on-site personnel and off-site receptors from exposure to unacceptable levels of site contaminants. Descriptions of air monitoring strategies, procedures and equipment are provided below. Modification of this plan, including additional monitoring, may be considered as judged necessary by the PSM, in conjunction with the HSO.

### **8.1**     **WORK AREA AIR MONITORING**

Work area air monitoring will include direct reading methods and personal exposure monitoring. Air monitoring will be conducted during soil/waste excavation, transportation, relocation and/or staging, and any other intrusive activities.

#### **8.1.1**    ***Direct Reading Air Monitoring***

During active sifting operations, direct reading air monitoring will be performed to determine the potential for worker exposure to airborne hazards. A summary of air monitoring information is provided in section 8.1.5. Real-time air samples will be taken at least four times each 8-hour worker shift in the workers breathing zone (BZ).

#### **8.1.2**    ***Instrumentation***

The following is a description of the air monitoring equipment to be used:

- MIE PDR-1000 Personal DataRAM, Dust trak or equivalent unit for real-time measuring particulates.

#### **8.1.3**    ***Use And Maintenance Of Survey Equipment***

All personnel using field survey equipment must have training in its operation, limitations, and maintenance. Maintenance and internal or electronic calibration will be performed in accordance with manufacturer recommendations by individuals familiar with the devices before

their use on site. Repairs, maintenance, and internal or electronic calibration of these devices will be recorded in an equipment maintenance logbook. The equipment maintenance logbook for each instrument will be kept in that instrument's case. For rented monitoring equipment, repairs and maintenance will be conducted by the rental company. Daily calibration records will be documented on a log sheet found in Appendix D.

Air monitoring equipment will be calibrated before work begins. Only basic maintenance (such as changing batteries) will be performed by on-site personnel. Any additional maintenance or repairs will be performed by a trained service technician.

#### 8.1.4 Air Monitoring Recordkeeping

The HSO will ensure that all air-monitoring data is recorded on a data sheet found in Appendix D. The PSM may periodically review this data.

#### 8.1.5 Action Levels

During soil/waste excavation, transportation, relocation and/or staging or any intrusive activities, direct reading air monitoring will be performed in the EZ to determine exposure to workers. A summary of air monitoring information is provided in the table below.

Monitoring Device	Monitoring Location/ Personnel	Monitoring Frequency	Action Level	Action
pDr-1000 (Dust)	Soil excavation areas/laborers, technicians, equipment operators	Four times every 8-hour shift during soil disturbance activities	<5.0 mg/m <sup>3</sup> * ≥5.0 mg/m <sup>3</sup> *	Level D  Stop work; notify PSM  Implement dust suppression measures and resume work after dust levels are below action level

\* Sustained levels in the breathing zone for 5 minutes

As indicated by the below calculations, the action level for PAHs and the metals of concern was selecting based on the OSHA PEL for respirable dust, which was found to be significantly

lower than the calculated actions levels for PAHs and copper, lead, mercury, and zinc based on utilizing the highest concentrations of these contaminants found in soil.

- Maximum concentration of selenium found in soil is 5.09 ppm or 0.000509%.
  - $5.0 \text{ mg/m}^3$  multiplied by 0.000509 =  $0.002545 \text{ mg/m}^3$
  - OSHA PEL for selenium is  $0.2 \text{ mg/m}^3$

## 9.0 *EMERGENCY RESPONSE AND CONTINGENCY PLAN (ERCP)*

### 9.1 PRE-EMERGENCY PLANNING

Prior to engaging in construction/remediation activities at the site, the CS will plan for possible emergency situations and have adequate supplies and manpower to respond. In addition, site personnel will be briefed on proper emergency response procedures during the site orientation.

The following situations would warrant implementation of the emergency plan:

Fire/Explosion	<ul style="list-style-type: none"> <li>• The potential for human injury exists.</li> <li>• Toxic fumes or vapors are released.</li> <li>• The fire could spread on site or off site and possibly ignite other flammable materials or cause heat-induced explosions.</li> <li>• The use of water and/or chemical fire suppressants could result in contaminated run-off.</li> <li>• An imminent danger of explosion exists.</li> </ul>
Spill or Release of Hazardous Materials	<ul style="list-style-type: none"> <li>• The spill could result in the release of flammable liquids or vapors, thus causing a fire or gas explosion hazard.</li> <li>• The spill could cause the release of toxic liquids or fumes in sufficient quantities or in a manner that is hazardous to or could endanger human health.</li> </ul>
Natural Disaster	<ul style="list-style-type: none"> <li>• A rain storm exceeds the flash flood level.</li> <li>• The facility is in a projected tornado path or a tornado has damaged facility property.</li> <li>• Severe wind gusts are forecasted or have occurred and have caused damage to the facility.</li> </ul>

Medical Emergency	<ul style="list-style-type: none"> <li>• Overexposure to hazardous materials.</li> <li>• Trauma injuries (broken bones, severe lacerations/bleeding, burns).</li> <li>• Eye/skin contact with hazardous materials.</li> <li>• Medical Conditions e.g., loss of consciousness, heat stress (heat stroke), heart attack, respiratory failure, allergic reaction.</li> </ul>
-------------------	---

The following measures will be taken to assure the availability of adequate equipment and manpower resources:

- Sufficient equipment and materials will be kept on site and dedicated for emergencies only. The inventory will be replenished after each use.
- It will be the responsibility of the CS/HSO to brief on site personnel on anticipated hazards at the site. The CS/HSO shall also be responsible for anticipating and requesting equipment that will be needed for response activities.

Communications will be established prior to commencement of any activities at the remediation site. Communication will be established so that all responders on site have availability to all pertinent information to allow them to conduct their activities in a safe and healthful manner. A telephone will be available to summon assistance in an emergency.

Primary communication with local responders in the event of an emergency will be accomplished using commercial telephone lines.

## 9.2 EMERGENCY RECOGNITION AND PREVENTION

Because unrecognized hazards may result in emergency incidents, it will be the responsibility of the CS and Health & Safety Officer (HSO), through daily site inspections and employee feedback to recognize and identify hazards that are found at the site. These may include:

Chemical Hazards	<ul style="list-style-type: none"> <li>• Materials at the site</li> <li>• Materials brought to the site</li> </ul>	
Physical Hazards	<ul style="list-style-type: none"> <li>• Fire/explosion</li> <li>• Slip/trip/fall</li> <li>• Electrocutation</li> </ul>	<ul style="list-style-type: none"> <li>• Confined space</li> <li>• IDLH atmospheres</li> <li>• Excessive noise</li> </ul>

Mechanical Hazards	<ul style="list-style-type: none"> <li>• Heavy equipment</li> <li>• Stored energy system</li> <li>• Pinch points</li> </ul>	<ul style="list-style-type: none"> <li>• Electrical equipment</li> <li>• Vehicle traffic</li> </ul>
Environmental Hazards	<ul style="list-style-type: none"> <li>• Electrical Storms</li> <li>• High winds</li> <li>• Heavy Rain/Snow</li> </ul>	<ul style="list-style-type: none"> <li>• Heat Stress</li> <li>• Vehicle traffic</li> </ul>

**9.3 EMERGENCY TELEPHONE NUMBERS**

Emergency telephone numbers can be found in Table 9-1. The emergency numbers will be posted in all site trailers.

Figure 9-1 is the Hospital Route Map with directions to the nearest hospital. Only in a non-emergency situation are personnel to be transported to the hospital by site representatives.

**FIGURE 9-1**

<b>TABLE 9-1</b>	
<b>EMERGENCY TELEPHONE NUMBERS</b>	
Emergency Medical Service.....	911
Police (NYPD):.....	911
Hospital (Brookdale University University and Medical Center).....	(718) 240-5000
Fire (FDNY).....	911
New York City Office of Emergency Management.....	911
National Response Center.....	(800) 424-8802
Poison Control Center.....	(800) 222-1222
Chemtrec.....	(800) 262-8200
Center for Disease Control.....	(800) 311-3435
USEPA (Region II).....	(212) 637-5000
NYSDEC Emergency Spill Response.....	(800) 457-7362
Contractor Emergency Numbers.....	(718) XXX-XXXX

**DIRECTIONS AND HOSPITAL ROUTE MAP**


**FIGURE 1 – HOSPITAL ROUTE PLAN**

**Site Location:** 9029 Flatlands Avenue, Brooklyn, NY 11236

**Hospital Location:** Brookdale University Hospital and Medical Center, One Brookdale Plaza, Brooklyn, NY 11212

**Information Line:** (718) 240-5000

Steps	Maneuvers	Dist.
1	Head southwest on Flatlands Avenue toward East 91 <sup>st</sup> Street	266 feet
2	Take the 1 <sup>st</sup> right onto Remson Avenue	0.7 miles
3	Turn right onto Ditmas Avenue	0.4 miles
4	Turn left onto Rockaway Parkway	0.4 miles
5	Turn right onto Church Avenue	305 feet
6	Turn right onto East 98 <sup>th</sup> Street	0.1 miles
<b>Total Est. Time: 8 minutes</b>		<b>Total Est. Distance: 1.6 miles</b>

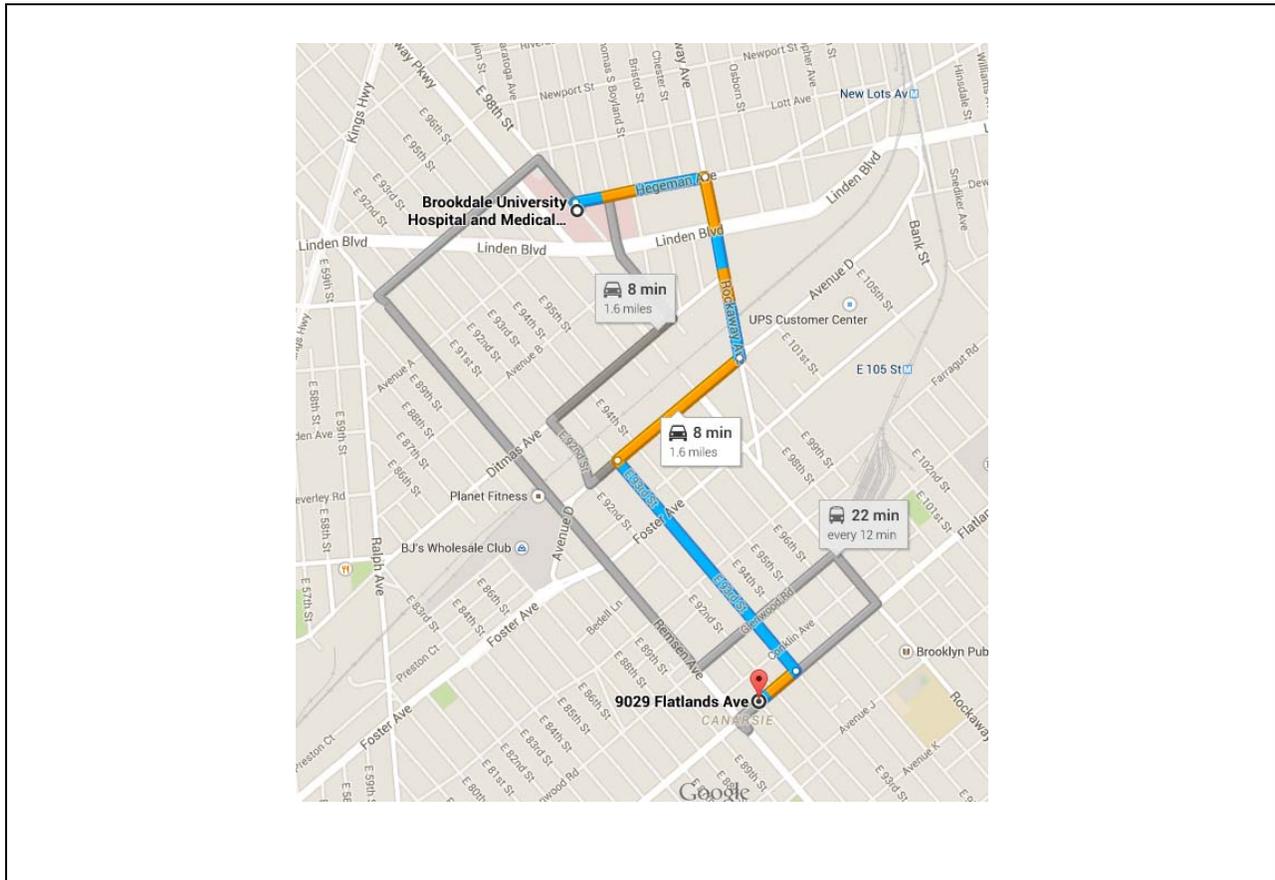

Once a hazard has been recognized, the CS and/or the HSO will take immediate action to prevent the hazard from becoming an emergency. This may be accomplished by the following:

- Daily safety meeting
- Task-specific training prior to commencement of activity
- Personal Protective Equipment (PPE) selection/use
- Written and approved permits for hot work, confined space
- Trenching/shoring procedure
- Air monitoring
- Following all standard operating procedures

#### **9.4 PERSONNEL ROLES, LINES OF AUTHORITY, AND COMMUNICATIONS**

This section of the ERCP describes the various roles, responsibilities, and communication procedures that will be followed by personnel involved in emergency responses.

The primary emergency coordinator for this site is the CS. In the event an emergency occurs and the emergency coordinator is not on site, the HSO will serve as the emergency coordinator until the CS arrives. The emergency coordinator will determine the nature of the emergency and take appropriate action as defined by this ERCP.

The emergency coordinator will implement the ERCP immediately as required. The decision to implement the plan will depend upon whether the actual incident threatens human health or the environment.

Immediately after being notified of an emergency incident, the emergency coordinator or his designee will evaluate the situation to determine the appropriate action.

##### **9.4.1 *Responsibilities and Duties***

This section describes the responsibilities and duties assigned to the emergency coordinator.

It is recognized that the structure of the "Incident Command System" will change as additional response organizations are added. Personnel will follow procedures as directed by the fire department, LEPC, State and Federal Agencies as required.

##### **9.4.2 *On-Site Emergency Coordinator Duties***

The on-site emergency coordinator is responsible for implementing and directing the emergency procedures. All emergency personnel and their communications will be coordinated through the emergency coordinator. Specific duties are as follows:

- Identify the source and character of the incident, type and quantity of any release. Assess possible hazards to human health or the environment that may result directly from the problem or its control.
- Discontinue operations in the vicinity of the incident if necessary to ensure that fires, explosions, or spills do not recur or spread to other parts of the site. While operations are dormant, monitor for leaks, pressure build-up, gas generation, or ruptures in valves, pipes, or other equipment, where safe and appropriate.
- Notify the Client Representative and local Emergency Response Teams if their help is necessary to control the incident. Table 9-1 provides telephone numbers for emergency assistance.
- Direct on-site personnel to control the incident until, if necessary, outside help arrives. Specifically: Ensure that the building or area where the incident occurred and the surrounding area are evacuated and shut off possible ignition sources, if safe and appropriate. The Emergency Response Coordinator is responsible for directing site personnel such that they avoid the area of the incident and leave emergency control procedures unobstructed.
- If fire or explosion is involved, notify local Fire Department.
- Have protected personnel, in appropriate PPE, on standby for rescue.

If the incident may threaten human health or the environment outside of the site, the emergency coordinator should immediately determine whether evacuation of area outside of the site may be necessary and, if so, notify the Police Department and the Office of Emergency Management.

When required, notify the National Response Center. The following information should be provided to the National Response Center:

- Name and telephone number
- Name and address of facility
- Time and type of incident
- Name and quantity of materials involved, if known
- Extent of injuries
- Possible hazards to human health or the environment outside of the facility.

The emergency telephone number for the National Response Center is 800-424-8802.

If hazardous waste has been released or produced through control of the incident, ensure that:

- Waste is collected and contained.
- Containers of waste are removed or isolated from the immediate site of the emergency.
- Treatment or storage of the recovered waste, contaminated soil or surface water, or any other material that results from the incident or its control is provided.
- Ensure that no waste that is incompatible with released material is treated or stored in the facility until cleanup procedures are completed.
- Ensure that all emergency equipment used is decontaminated, recharged, and fit for its intended use before operations are resumed.
- Notify the USEPA Regional Administrator that cleanup procedures have been completed and that all emergency equipment is fit for its intended use before resuming operations in the affected area of the facility. The USEPA Regional Administrator's telephone number is included in the Emergency Contacts.
- Record date, time, details of the incident, and submit a written report to the USEPA Regional Administrator. The report is due to the USEPA within 15 days of the incident.

## **9.5 SAFE DISTANCES AND PLACES OF REFUGE**

The emergency coordinator for all activities will be the CS. No single recommendation can be made for evacuation or safe distances because of the wide variety of emergencies which could occur. Safe distances can only be determined at the time of an emergency based on a combination of site and incident-specific criteria. However, the following measures are established to serve as general guidelines.

In the event of minor hazardous materials releases (small spills of low toxicity), workers in the affected area will report initially to the contamination reduction zone. Small spills or leaks (generally less than 55 gallons) will require initial evacuation of at least 50 feet in all directions to allow for cleanup and to prevent exposure. After initial assessment of the extent of the release and potential hazards, the emergency coordinator or his designee will determine the specific boundaries for evacuation. Appropriate steps such as caution tape, rope, traffic cones, barricades, or personal monitors will be used to secure the boundaries.

If a major incident may threaten the health or safety of the surrounding community, the public will be informed and, if necessary, evacuated from the area. The emergency coordinator,

or his designee will inform the proper agencies in the event that this is necessary. Telephone numbers are listed in Table 9-1.

Places of refuge will be established prior to the commencement of activities. These areas must be identified for the following incidents:

- Chemical release
- Fire/explosion
- Power loss
- Medical emergency
- Hazardous weather

In general, evacuation will be made to the site entrance, unless the emergency coordinator determines otherwise. It is the responsibility of the emergency coordinator to determine when it is necessary to evacuate personnel to off-site locations.

In the event of an emergency evacuation, all the employees will gather at the entrance to the site until a head count establishes that all are present and accounted for. No one is to leave the site without notifying the emergency coordinator.

## **9.6 EVACUATION ROUTES AND PROCEDURES**

All emergencies require prompt and deliberate action. In the event of an emergency, it will be necessary to follow an established set of procedures. Such established procedures will be followed as closely as possible. However, in specific emergency situations, the emergency coordinator may deviate from the procedures to provide a more effective plan for bringing the situation under control. The emergency coordinator is responsible for determining which situations require site evacuation.

### **9.6.1 *Evacuation Signals and Routes***

Two-way radio communication or equivalent will be used to notify employees of the necessity to evacuate an area or building involved in a release/spill of a hazardous material. As necessary, each crew supervisor will have a two-way radio. Total site evacuation will be initiated only by the emergency coordinator, however, in his absence, decision to preserve the health and safety of employees will take precedence.

### **9.6.2 *Evacuation Procedures***

In the event evacuation is necessary the following actions will be taken:

- The emergency signal will be activated.

- No further entry of visitors, contractors, or trucks will be permitted. Vehicle traffic within the site will cease in order to allow safe exit of personnel and movement of emergency equipment.
- Shut off all machinery if safe to do so.
- ALL on-site personnel, visitors, and contractors in the support zone will assemble at the entrance to the site for a head count and await further instruction from the emergency coordinator.
- ALL persons in the exclusion zone and contamination reduction zone will be accounted for by their immediate crew leaders. Leaders will determine the safest exits for employees and will also choose an alternate exit if the first choice is inaccessible.
- During exit, the crew leader should try to keep the group together. Immediately upon exit, the crew leader will account for all employees in his crew.
- Upon completion of the head count, the crew leader will provide the information to the emergency coordinator.
- Contract personnel and visitors will also be accounted for.
- The names of emergency response team members involved will be reported to the emergency coordinator.
- A final tally of persons will be made by the emergency coordinator or designee. No attempt to find persons not accounted for will involve endangering lives of site personnel by re-entry into emergency areas.
- In all questions of accountability, immediate crew leaders will be held responsible for those persons reporting to them. Visitors will be the responsibility of those employees they are seeing. Contractors and truck drivers are the responsibility of the Construction Superintendent.
- Personnel will be assigned by the emergency coordinator to be available at the main gate to direct and brief emergency responders.
- Re-entry into the site will be made only after clearance is given by the emergency coordinator. At his direction, a signal or other notification will be given for re-entry into the facility.

## **9.7 EMERGENCY SPILL RESPONSE PROCEDURES AND EQUIPMENT**

In the event of an emergency involving a hazardous material spill or release, the following general procedures will be used for rapid and safe response and control of the situation. Emergency contacts found in Table 9-1 provide a quick reference guide to follow in the event of a major spill.

### **9.7.1 *Notification Procedures***

If an employee discovers a chemical spill or process upset resulting in a vapor or material release, he or she will immediately notify the on-site emergency coordinator.

On-site Emergency Coordinator will obtain information pertaining to the following:

- The material spilled or released.
- Location of the release or spillage of hazardous material.
- An estimate of quantity released and the rate at which it is being released.
- The direction in which the spill, vapor or smoke release is heading.
- Any injuries involved.
- Fire and/or explosion or possibility of these events.
- The area and materials involved and the intensity of the fire or explosion.

This information will help the on-site emergency coordinator to assess the magnitude and potential seriousness of the spill or release.

### **9.7.2 *Procedure for Containing/Collecting Spills***

The initial response to any spill or discharge will be to protect human health and safety, and then the environment. Identification, containment, treatment, and disposal assessment will be the secondary response.

If for some reason a chemical spill is not contained within a dike or sump area, an area of isolation will be established around the spill. The size of the area will generally depend on the size of the spill and the materials involved. If the spill is large (greater than 55 gallons) and involves a tank or a pipeline rupture, an initial isolation of at least 100 ft. in all directions will be used. Small spills (less than or equal to 55 gallons) or leaks from a tank or pipe will require evacuation of at least 50 ft. in all directions to allow cleanup and repair and to prevent exposure. When any spill occurs, only those persons involved in overseeing or performing emergency operations will be allowed within the designated hazard area. If possible the area will be roped or otherwise blocked off.

If the spill results in the formation of a toxic vapor cloud (by reaction with surrounding materials or by outbreak of fire) and its release (due to high vapor pressures under ambient conditions), further evacuation will be necessary. In general an area at least 500 feet wide and 1,000 feet long will be evacuated downwind if volatile materials are spilled. (Consult the DOT Emergency Response Guide for isolation distances for listed hazardous materials.)

If an incident may threaten the health or safety of the surrounding community, the public will be informed and possibly evacuated from the area. The on-site emergency coordinator will inform the proper agencies in the event this is necessary. (Refer to Table 9-1)

As called for in regulations developed under the Comprehensive Environmental Response Compensation Liability Act of 1980 (Superfund), a spill of a pound or more of any hazardous material for which a reportable quantity has not been established and which is listed under the Solid Waste Disposal Act, Clean Air Act, Clean Water Act, or TSCA shall be reported.

Clean up personnel will take the following measures:

- Make sure all unnecessary persons are removed from the hazard area.
- Put on protective clothing and equipment.
- If a flammable material is involved, remove all ignition sources, and use spark and explosion proof equipment for recovery of material.
- Remove all surrounding materials that could be especially reactive with materials in the waste. Determine the major components in the waste at the time of the spill.
- If wastes reach a storm sewer, try to dam the outfall by using sand, earth, sandbags, etc. If this is done, pump this material out into a temporary holding tank or drums as soon as possible.
- Place all small quantities of recovered liquid wastes (55 gallons or less) and contaminated soil into drums for incineration or removal to an approved disposal site.
- Spray the spill area with foam, if available, if volatile emissions may occur.
- Apply appropriate spill control media (e.g. clay, sand, lime, etc.) to absorb discharged liquids.

For large spills, establish diking around leading edge of spill using booms, sand, clay or other appropriate material. If possible, use diaphragm pump to transfer discharged liquid to drums or holding tank.

### **9.7.3 *Emergency Response Equipment***

The following equipment will be staged in the support zone and throughout the site, as needed, to provide for safety and first aid during emergency responses.

- ABC-type fire extinguisher
- First-aid kit, industrial size
- Portable eyewash

### **9.7.4 *Emergency Spill Response Clean-Up Materials and Equipment***

A sufficient supply of appropriate emergency response clean-up and personal protective equipment will be available as needed.

The materials listed below may be kept on site for spill control, depending on the types of hazardous materials present on site. The majority of this material will be located in the support zone, in a supply trailer or storage area. Small amounts, as necessary, will be placed on pallets and located in the active work areas.

- Sand or clay to solidify/absorb liquid spills.
- \* **Note: All contaminated soils, absorbent materials, solvents and other materials resulting from the clean-up of spilled or discharged substances shall be properly stored, labeled, and disposed of off-site.**

## **9.8 EMERGENCY CONTINGENCY PLAN**

This section of the ERCP details the contingency measures the Site Contractor will take to prepare for and respond to fires, explosions, spills and releases of hazardous materials, hazardous weather, and medical emergencies.

## **9.9 MEDICAL EMERGENCY CONTINGENCY MEASURES**

The procedures listed below will be used to respond to medical emergencies. A minimum of one First-Aid/CPR trained personnel should be available on site.

### **9.9.1 *Response***

The nearest workers will immediately assist a person who shows signs of medical distress or who is involved in an accident. The work crew supervisor will be summoned.

The work crew supervisor will immediately make radio contact with the on-site emergency coordinator to alert him of a medical emergency situation. The supervisor will advise the following information:

- Location of the victim at the work site

- Nature of the emergency
- Whether the victim is conscious
- Specific conditions contributing to the emergency, if known

The Emergency Coordinator will notify the Health & Safety Officer. The following actions will then be taken depending on the severity of the incident:

- *Life-Threatening Incident* – If an apparent life-threatening condition exists, the crew supervisor will inform the emergency coordinator by radio, and the local Emergency Response Services (EMS) will be immediately called. An on-site person will be appointed who will meet the EMS and have him/her quickly taken to the victim. Any injury within the EZ will be evacuated by personnel to a clean area for treatment by EMS personnel. No one will be able to enter the EZ without showing proof of training, medical surveillance and site orientation.
  - *Non Life-Threatening Incident* – If it is determined that no threat to life is present, the Health & Safety Officer will direct the injured person through decontamination procedures (see below) appropriate to the nature of the illness or accident. Appropriate first aid or medical attention will then be administered.
- \* **Note: The area surrounding an accident site must not be disturbed until the scene has been cleared by the Health & Safety Officer.**

Any personnel requiring emergency medical attention will be evacuated from exclusion and contamination reduction zones if doing so would not endanger the life of the injured person or otherwise aggravate the injury. Personnel will not enter the area to attempt a rescue if their own lives would be threatened. The decision whether or not to decontaminate a victim prior to evacuation is based on the type and severity of the illness or injury and the nature of the contaminant. For some emergency victims, immediate decontamination may be an essential part of life-saving first aid. For others, decontamination may aggravate the injury or delay life-saving first aid. Decontamination will be performed if it does not interfere with essential treatment.

If decontamination can be performed, observe the following procedures:

- Wash external clothing and cut it away.

If decontamination cannot be performed, observe the following procedures:

- Wrap the victim in blankets or plastic to reduce contamination of other personnel.

- Alert emergency and off-site medical personnel to potential contamination, instruct them about specific decontamination procedures.
- Send site personnel familiar with the incident and chemical safety information, e.g. MSDS, with the affected person.

All injuries, no matter how small, will be reported to the HSO or the CS. An accident/injury/illness report will be completely and properly filled out and submitted to the Corporate Health and Safety Manager.

A list of emergency telephone numbers is given in Table 9.1.

### **9.9.2 Notification**

The following personnel/agencies will be notified in the event of a medical emergency:

- Local Fire Department or EMS
- On-site Emergency Coordinator
- Workers in the affected areas
- Client Representative

### **9.10 FIRE CONTINGENCY MEASURES**

Because flammable/combustible materials are present at this site, fire is an ever-present hazard. Safety personnel are not trained professional firefighters. Therefore, if there is any doubt that a fire can be quickly contained and extinguished, personnel will notify the emergency coordinator by radio and vacate the structure or area. The emergency coordinator will immediately notify the local Fire Department.

The following procedures will be used to prevent the possibility of fires and resulting injuries:

- Sources of ignition will be kept away from where flammable materials are handled or stored.
- The air will be monitored for explosivity before and during hot work and periodically where flammable materials are present. Hot work permits will be required for all such work.
- "No smoking" signs will be conspicuously posted in areas where flammable materials are present.
- Fire extinguishers will be placed in all areas where a fire hazard may exist.

- Before workers begin operations in an area the foreman will give instruction on egress procedures and assembly points. Egress routes will be posted in work areas and exit points clearly marked.

#### **9.10.1 Response**

The following procedures will be used in the event of a fire:

- Anyone who sees a fire will notify their supervisor who will then contact the Emergency Coordinator by radio. The emergency coordinator will activate the emergency air horns and contact the local Fire Department.
- When the emergency siren sounds, workers will disconnect electrical equipment in use (if possible) and proceed to the nearest fire exit.
- Work crews will be comprised of pairs of workers (buddy system) who join each other immediately after hearing the fire alarm and remain together throughout the emergency. Workers will assemble at a predetermined rally point for a head count.
- When a small fire has been extinguished by a worker, the emergency coordinator will be notified.

#### **9.11 HAZARDOUS WEATHER CONTINGENCY MEASURES**

Operations outside will not be started or continued when the following hazardous weather conditions are present:

- Lightning
- Heavy Rains/Snow
- High Winds

##### **9.11.1 Response**

- Excavation/soil stock piles will be covered with plastic liner.
- All equipment will be shut down and secured to prevent damage.
- Personnel will be moved to safe refuge. The emergency coordinator will determine when it is necessary to evacuate personnel to off-site locations and will coordinate efforts with fire, police and other agencies.

##### **9.11.2 Notification**

The emergency coordinator will be responsible for assessing hazardous weather conditions and notifying personnel of specific contingency measures. Notifications will include:

- Site workers and subcontractors
- Client Representative
- Local Emergency Management Agency

## **9.12 SPILL/RELEASE CONTINGENCY MEASURES**

In the event of release or spill of a hazardous material the following measures will be taken:

### **9.12.1 *Response***

Any person observing a spill or release will act to remove and/or protect injured/contaminated persons from any life-threatening situation. First aid and/or decontamination procedures will be implemented as appropriate.

First aid will be administered to injured/contaminated personnel. All personnel will act to prevent any unsuspecting persons from coming in contact with spilled materials by alerting other nearby persons. Attempt to stop the spill at the source, if possible. Without taking unnecessary risks, personnel will attempt to stop the spill at the source. This may involve activities such as uprighting a drum, closing a valve or temporarily sealing a hole with a plug.

The emergency coordinator will be notified of the spill/release, including information on material spilled, quantity, personnel injuries and immediate life threatening hazards. Air monitoring will be implemented by the emergency coordinator and HSO to determine the potential impact on the surrounding community. Notification procedures will be followed to inform on-site personnel and off-site agencies. The emergency coordinator will make a rapid assessment of the spill/release and direct confinement, containment and control measures. Depending upon the nature of the spill, measures may include:

- Construction of a temporary containment berm utilizing on-site clay absorbent earth
- Digging a sump, installing a polyethylene liner and
- Diverting the spill material into the sump placing drums under the leak to collect the spilling material before it flows over the ground
- Transferring the material from its original container to another container

The emergency coordinator will notify the Client Representative of the spill and steps taken to institute clean-up. Emergency response personnel will clean-up all spills following the spill clean-up plan developed by the emergency coordinator. Supplies necessary to clean up a spill may include, but are not limited to:

- Shovel, rake

- Clay absorbent
- Polyethylene liner
- Personal safety equipment
- Steel drums
- Pumps and miscellaneous hand tools

The emergency coordinator will inspect the spill site to determine that the spill has been cleaned up to the satisfaction of the Client Representative. If necessary, soil, water or air samples may be taken and analyzed to demonstrate the effectiveness of the spill clean-up effort. The emergency coordinator will determine the cause of the spill and determine remedial steps to ensure that recurrence is prevented. The emergency coordinator will review the cause with the Client Representative and obtain his concurrence with the remedial action plan.

## 10.0 TRAINING REQUIREMENTS

All personnel entering the exclusion zone will be trained in the provisions of this site safety plan and be required to sign the CHASP Acknowledgment form in Appendix A.

### 10.1 SITE-SPECIFIC TRAINING ORIENTATION

Outlines of the orientation for site workers, subcontractor personnel and visitors are presented below:

CONTRACTOR WORKERS	VISITORS
<ul style="list-style-type: none"> <li>• HASP sign off</li> <li>• Sign in/out procedures</li> <li>• Site background/characterization</li> <li>• Chain of command</li> <li>• Rules and regulations</li> <li>• Hours of work</li> <li>• Absences</li> <li>• Personal Protective Equipment/respirator fit test (if applicable)</li> <li>• Emergency Information               <ul style="list-style-type: none"> <li>• Emergency signal</li> <li>• Gathering point</li> <li>• Responsibilities/roles</li> <li>• Emergency phone numbers</li> </ul> </li> <li>• Site Control/Work Zones</li> <li>• Hazards/AHAs</li> <li>• Air Monitoring Program</li> <li>• Forms, site-specific</li> <li>• Incident Reporting</li> <li>• Lead Awareness (Appendix C)</li> </ul>	<ul style="list-style-type: none"> <li>• Sign in/out procedures</li> <li>• Site Background/Characterization</li> <li>• Review of Site map</li> <li>• Work Zones in progress</li> <li>• Emergency plan/signals</li> <li>• Training/medical requirements</li> <li>• Zones/areas open to visitors</li> </ul>

### 10.2 DAILY SAFETY MEETINGS

A safety meeting will be conducted by the CS and the HSO before each shift begins. Topics to be discussed include task hazards and protective measures (physical, chemical, environmental);

emergency procedures; PPE levels and other relevant safety topics. Meetings will be documented in a log book or specific form.

## **APPENDIX A**

---

- *HEALTH AND SAFETY PLAN CERTIFICATION*
- *GENERAL/SUB-CONTRACTOR HEALTH & SAFETY PLAN ACKNOWLEDGEMENT*
- *NOTICE OF SAFETY VIOLATION*
- *PRE-JOB SAFETY CHECKLIST*



**NOTICE OF SAFETY VIOLATION**

**TO:** \_\_\_\_\_ (Name of Contractor/Subcontractor Supervisor)  
**FROM:** \_\_\_\_\_ (Name of Owner/Contractor's Project Manager)  
**DATE:** \_\_\_\_\_  
**SUBJECT:** *Notice of Safety Violations*

The following Safety Violations were observed at the Name of Site/Project on Date.

1. \_\_\_\_\_
2. \_\_\_\_\_
3. \_\_\_\_\_
4. \_\_\_\_\_
5. \_\_\_\_\_

You are requested to take the necessary corrective action to alleviate these safety violations by \_\_\_\_\_ (Date).

Please notify \_\_\_\_\_ (Name of Contractor/Subcontractor's Project Manager) when you have completed this corrective action.

Thank you in advance for your cooperation in this effort.

CONTRACTOR/SUBCONTRACTOR  
PRE-JOB SAFETY CHECKLIST

JOB:

SUBCONTRACTOR:

LOCATION:

PROJECT NO.

		<u>Yes</u>	<u>No</u>
1.	Standard emergency signals fully understood?	<input type="checkbox"/>	<input type="checkbox"/>
2.	Subcontractor responsibility in time of emergency understood?	<input type="checkbox"/>	<input type="checkbox"/>
3.	Fire and ambulance telephone numbers known?	<input type="checkbox"/>	<input type="checkbox"/>
4.	Areas for possible evacuation designated?	<input type="checkbox"/>	<input type="checkbox"/>
5.	Special safety rules for the plant or area known?	<input type="checkbox"/>	<input type="checkbox"/>
6.	Nature of Chemical or special hazards for area reviewed with safety officer?	<input type="checkbox"/>	<input type="checkbox"/>
7.	Special safety equipment for the area of job known?	<input type="checkbox"/>	<input type="checkbox"/>
8.	Safety shower and eye wash locations known?	<input type="checkbox"/>	<input type="checkbox"/>
9.	Smoking area designated?	<input type="checkbox"/>	<input type="checkbox"/>
10.	Have you been advised of potential hazards, protective Measures and availability of hazard information? e.g. Health & Safety Plan	<input type="checkbox"/>	<input type="checkbox"/>
11.	Do you understand you are required to provide your employees with the information in (10) above?	<input type="checkbox"/>	<input type="checkbox"/>
12.	Have you provided MSDSs to Athenica for any hazardous material you intend to bring on site?	<input type="checkbox"/>	<input type="checkbox"/>
13.	Have you submitted training/medical certification records?	<input type="checkbox"/>	<input type="checkbox"/>
14.	Are your subcontractors aware of the above rules?	<input type="checkbox"/>	<input type="checkbox"/>

Remarks: (Explain all No Answers) \_\_\_\_\_

\_\_\_\_\_  
Subcontractor's Supervisor

\_\_\_\_\_  
Date

\_\_\_\_\_  
Contractor's Project Manager

\_\_\_\_\_  
Date

\_\_\_\_\_  
Contractor's Project Supervisor

\_\_\_\_\_  
Date

\_\_\_\_\_  
Health & Safety Officer

\_\_\_\_\_  
Date

**APPENDIX B**

---

***HEALTH AND SAFETY PLAN AMENDMENTS AND DOCUMENTATION FORM***

**SITE-SPECIFIC HEALTH AND SAFETY PLAN  
AMENDMENT DOCUMENTATION**

**Project Name:** \_\_\_\_\_ **Project No.:** \_\_\_\_\_

**Amendment No.:** \_\_\_\_\_ **Date:** \_\_\_\_\_

**Amendment Page(s):** \_\_\_\_\_ **Revises:** \_\_\_\_\_ **Section(s):** \_\_\_\_\_

**Task(s) Amendment Affects:\*** \_\_\_\_\_

\_\_\_\_\_  
*\*(Attach new/revised Job Safety Analyses)*

**Reason For Amendment:**

\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

**Amendment:** *(Attach separate sheet(s) as necessary)*

\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

---

**Completed by:** \_\_\_\_\_ **Approved by:** \_\_\_\_\_

**SITE-SPECIFIC HEALTH AND SAFETY PLAN  
AMENDMENT DOCUMENTATION**

**Project Name:** \_\_\_\_\_ **Project No.:** \_\_\_\_\_

**Amendment No.:** \_\_\_\_\_ **Date:** \_\_\_\_\_

**Amendment Page(s):** \_\_\_\_\_ **Revises:** \_\_\_\_\_ **Section(s):** \_\_\_\_\_

**SITE-SPECIFIC HEALTH AND SAFETY PLAN  
AMENDMENT DOCUMENTATION**

**Project Name:** \_\_\_\_\_ **Project No.:** \_\_\_\_\_

**Amendment No.:** \_\_\_\_\_ **Date:** \_\_\_\_\_

**Amendment Page:** \_\_\_\_\_ **Revises:** \_\_\_\_\_ **Section:** \_\_\_\_\_

**Task(s) Amendment Affects:\*** \_\_\_\_\_

\_\_\_\_\_  
*\*(Attach new/revised Job Safety Analyses)*

**Reason For Amendment:**

\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

**Amendment:** *(Attach separate sheet(s) as necessary)*

\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

---

**Completed by:** \_\_\_\_\_ **Approved by:** \_\_\_\_\_

**APPENDIX C**

---

*DAILY SAFETY REPORT FORM*

*AIR MONITORING FORMS*









	pDR-1500, Dusttrack or equivalent			Filter			
	pDR-1500, Dusttrack or equivalent			Filter			
	pDR-1500, Dusttrack or equivalent			Filter			
	pDR-1500, Dusttrack or equivalent			Filter			
	pDR-1500, Dusttrack or equivalent			Filter			

Calibration gases: 1. 100 ppm isobutylene, 2. 50% LEL methane, 3. 50 ppm CO, 4. 25 ppm H<sub>2</sub>S

**APPENDIX D**

---

***TAILGATE SAFETY MEETING FORM***

## Daily Safety Meeting Report

Project Name:

Location:

Date:

Today's Tasks/Activities:

---

---

---

---

---

---

---

---

Potential Chemical/Physical Hazards:

---

---

---

---

---

---

---

---

Personal Protective Equipment:

---

---

---

---

---

---

---

---

Attendees:

<hr/>	<hr/>

HSO: \_\_\_\_\_ Const. Supt:  
\_\_\_\_\_  
(Signature) (Signature)



## **APPENDIX 5**

# **PROPOSED DEVELOPMENT PLANS**



blink FITNESS

blink FITNESS



blink  
FITNESS

blink  
FITNESS

BMW X6

GENERAL NOTES

- THE CONTRACTOR, AS NOTED HEREIN, SHALL REFER TO ALL TRADE CONTRACTORS AND SUB-CONTRACTORS WORKING ON THIS PROJECT. THE CONTRACTOR IS RESPONSIBLE FOR, BUT NOT LIMITED TO, THE FOLLOWING:
1. SUMMARY.
2. PLANS, SPECIFICATIONS AND OTHER CONTRACT DOCUMENTS WILL GOVERN THE WORK TO BE DONE.
3. THE DOCUMENTS SHALL NOT BE SCALED FOR INFORMATION. ALL DIMENSIONS ARE NOMINAL, UNLESS OTHERWISE NOTED.
4. THE ARCHITECT IS NOT RESPONSIBLE FOR THE MEANS OR METHODS OF CONSTRUCTION.
5. GENERAL CONTRACTOR SHALL ENSURE ALL NECESSARY APPROVALS AND PERMITS HAVE BEEN OBTAINED PRIOR TO COMMENCEMENT OF THE WORK.
6. THE GENERAL CONDITIONS OF THE AIA DOCUMENT A-201, LATEST EDITION, ARE PART OF THIS CONTRACT AND SHALL APPLY TO ALL CONTRACTORS.
7. THE CONTRACTOR SHALL FURNISH ALL LABOR, MATERIALS, APPURTENANCES, EQUIPMENT AND SERVICES NECESSARY AND REQUIRED TO COMPLETE HIS SCOPE OF WORK AS INDICATED ON THE DRAWINGS AND/OR CALLED FOR IN THE SPECIFICATIONS.
8. THE GENERAL CONTRACTOR SHALL PROVIDE NECESSARY ENCLOSURES, BARRIERS, SCAFFOLDING, LADDERS, TEMPORARY SUPPORTS, BRACINGS, ETC., AS REQUIRED FOR SAFETY, AS IT RELATES TO HIS SCOPE OF WORK.
9. ALL CONTRACTORS AND SUBCONTRACTORS ON THIS PROJECT SHALL BE RESPONSIBLE FOR THE PROPER PERFORMANCE OF THEIR WORK, COORDINATION WITH OTHER TRADES, METHODS SAFETY AND SECURITY ON THE JOB SITE.
10. GENERAL CONTRACTOR SHALL COORDINATE ALL WORK BY AND BETWEEN THE SUBCONTRACTORS.
11. THE GENERAL CONTRACTOR SHALL COORDINATE ALL WORK BY AND BETWEEN THE SUBCONTRACTORS AND SHALL BE RESPONSIBLE FOR THE SUPERVISION OF THE WORK. THE GENERAL CONTRACTOR SHALL BEAR ALL COSTS ARISING FROM RECTIFYING WORK KNOWNLY PERFORMED CONTRARY TO LAW OR BEST PRACTICE.
12. THE GENERAL CONTRACTOR AND ALL SUBCONTRACTORS ON THIS PROJECT SHALL BE RESPONSIBLE FOR THE PROPER PERFORMANCE OF THEIR WORK, COORDINATION WITH OTHER TRADES, METHODS OF CONSTRUCTION, SAFETY AND SECURITY ON THE JOB SITE.
13. MATERIALS, METHODS AND QUALITY OF WORKMANSHIP SHALL MEET OR EXCEED INDUSTRY STANDARDS.
14. GUARANTEE & PERFORMANCE. THE CONTRACTOR, IN HIS ACCEPTANCE OF THE CONTRACT FOR THE WORK HEREIN, AGREES THAT THE GUARANTEE PERIODS COVERING LABOR AND WORKMANSHIP, MATERIALS, AND EQUIPMENT SHALL BE FOR ONE YEAR UNLESS OTHERWISE REQUIRED IN THE SPECIFICATIONS.
15. THE CONTRACTOR'S PRICE SHALL ALSO INCLUDE INSURANCE COVERAGES, AND PROVISIONS FOR ALL NECESSARY SECURITY AND SAFETY REQUIREMENTS. THE CONTRACTOR SHALL NOT COMMENCE WORK UNDER THIS CONTRACT UNTIL HE HAS OBTAINED ALL THE INSURANCE NECESSARY. THE INSURANCE REQUIRED SHALL BE MAINTAINED IN FORCE UNTIL ALL WORK TO BE PERFORMED UNDER THE TERMS OF THE CONTRACT IS SATISFACTORILY COMPLETED AND ACCEPTED.
16. ALL DRAWINGS AND SPECIFICATIONS AND COPIES THEREOF FURNISHED BY GAMBINO + LAPORTA ARCHITECTURE D.P.C. ARE AND SHALL REMAIN THE PROPERTY OF GAMBINO + LAPORTA ARCHITECTURE D.P.C. THEY ARE TO BE USED ONLY WITH RESPECT TO THIS PROJECT AND ARE NOT TO BE USED ON ANY OTHER PROJECT.
17. THESE DRAWINGS ARE INTENDED ONLY AS AN OUTLINE FOR CONSTRUCTION. THE CONTRACTOR IS RESPONSIBLE FOR ALL DESIGN NOT SPECIFICALLY AND COMPLETELY SHOWN AND SPECIFIED. ALL ASSUMPTIONS REACHED FROM REVIEW OF THESE DRAWINGS SHALL BE TOTALLY THE RESPONSIBILITY OF THE PARTY MAKING THE ASSUMPTIONS.
18. ALL DIMENSIONS ON PLANS ARE NOMINAL AND ARE CALCULATED FOR ONE 1/2" GYPSUM BOARD FINISHED WALLS. CRITICAL DIMENSIONS ARE NOTED "HOLD". FINISHED DIMENSIONS WILL VARY IN ACTUAL CONSTRUCTION.
19. CONTRACTOR IS RESPONSIBLE FOR FORMULATING, DOCUMENTING AND CARRYING OUT SOIL EROSION AND SEDIMENTATION CONTROL PLAN WHICH SHALL INCLUDE PROVIDING AND MAINTAINING OF SWALES, DIVERSIONS AND FILTERS IN THE CONSTRUCTION AREA AND AROUND THE WORK SITE TO PREVENT SOIL EROSION AND SEDIMENTATION PROBLEMS.
20. SITE GRADING SHALL DIRECT WATER AWAY FROM BUILDING.
21. ELEVATIONS OF GARAGES, PORCHES, TERRACES, GRADE LINES, ETC., SHOWN ON DRAWINGS ARE SUBJECT TO CHANGE TO MEET TOPOGRAPHICAL CONDITIONS. CONTRACTOR SHALL DETERMINE LENGTH AND DEPTH OF FROST FOOTINGS TO MAINTAIN FOUR FEET MINIMUM BELOW GRADE AS SITE CONDITIONS VARY FROM THOSE SHOWN ON DRAWINGS.
22. THE CONTRACTOR SHALL VERIFY AND PROTECT ALL SERVICE LINES AND EXISTING SITE AREAS FROM DETERIORATION OR DAMAGE.
23. THE CONTRACTOR SHOULD MAKE NO STRUCTURAL CHANGES WITHOUT WRITTEN CONSENT OF THE ARCHITECT.
24. ALL MANUFACTURER'S PRINTED WARNINGS FOR HANDLING OF PRODUCTS MUST BE STRICTLY OBSERVED. THE WORDS "OR EQUAL" ARE TO BE ASSUMED WHENEVER A SPECIFIC MANUFACTURER IS NOTED.
25. ALL WORK IN PROGRESS SHALL BE ADEQUATELY BRACED AND PROTECTED UNTIL CONSTRUCTION IS COMPLETED.
26. THE BUILDING PERMIT AND ALL REQUIRED PERMITS AND INSPECTION FEES SHALL BE OBTAINED BY THE CONTRACTOR.
27. CONTRACTOR IS RESPONSIBLE FOR SAFETY PRECAUTIONS ON THE JOB.
28. THE OWNER ASSUMES NO LIABILITY FOR EXISTING DEVELOPED CONDITIONS IN RESPECT TO THE BUILDING SITE, SUBSURFACE WATER, ROCK OR SOIL, BACK FILL MATERIALS OR METHODS USED, ETC.

DIVISION 02-EXISTING CONDITIONS

DOCUMENT 02416 STRUCTURE DEMOLITION

MATERIALS OWNERSHIP

- 1. UNLESS OTHERWISE INDICATED, DEMOLITION WASTE BECOMES PROPERTY OF CONTRACTOR.
2. HISTORIC ITEMS, RELICS, ANTIQUES, AND SIMILAR OBJECTS INCLUDING, BUT NOT LIMITED TO, CORNERSTONES AND THEIR CONTENTS, COMMEMORATIVE PLAQUES AND TABLETS, AND OTHER ITEMS OF INTEREST OR VALUE TO OWNER THAT MAY BE UNCOVERED DURING DEMOLITION REMAIN THE PROPERTY OF OWNER.
3. CAREFULLY SALVAGE IN A MANNER TO PREVENT DAMAGE AND PROMPTLY RETURN TO OWNER.

INFORMATION SUBMITTALS

- 1. ENGINEERING SURVEY: SUBMIT ENGINEERING SURVEY OF CONDITION OF BUILDING.
2. PROPOSED PROTECTION MEASURES: SUBMIT REPORT, INCLUDING DRAWINGS, THAT INDICATES THE MEASURES PROPOSED FOR PROTECTING INDIVIDUALS AND PROPERTY FOR ENVIRONMENTAL PROTECTION, FOR DUST CONTROL, AND/OR NOISE CONTROL. INDICATE PROPOSED LOCATIONS AND CONSTRUCTION OF BARRIERS.
3. ADJACENT BUILDINGS: DETAIL SPECIAL MEASURES PROPOSED TO PROTECT ADJACENT BUILDINGS TO REMAIN INCLUDING MEANS OF EGRESS FROM THOSE BUILDINGS.
4. SCHEDULE OF BUILDING DEMOLITION ACTIVITIES WITH STARTING AND ENDING DATES FOR EACH ACTIVITY.
5. PREDEMOLITION PHOTOGRAPHS OR VIDEO.
6. STATEMENT OF REFRIGERANT RECOVERY, SIGNED BY REFRIGERANT RECOVERY TECHNICIAN.

CLOSEOUT SUBMITTALS

- 1. INVENTORY OF ITEMS THAT HAVE BEEN REMOVED AND SALVAGED.

QUALITY ASSURANCE

- 1. REFRIGERANT RECOVERY TECHNICIAN QUALIFICATIONS: CERTIFIED BY EPA-APPROVED CERTIFICATION PROGRAM.
FIELD CONDITIONS:
1. BUILDINGS TO BE DEMOLISHED WILL BE VACATED AND THEIR USE DISCONTINUED BEFORE START OF THE WORK.
2. BUILDINGS IMMEDIATELY ADJACENT TO DEMOLITION AREA WILL BE OCCUPIED. CONDUCT BUILDING DEMOLITION SO OPERATIONS OF OCCUPIED BUILDINGS WILL NOT BE DISRUPTED.
A. PROVIDE NOT LESS THAN 12 HOURS' NOTICE OF ACTIVITIES THAT WILL AFFECT OPERATIONS OF ADJACENT OCCUPIED BUILDINGS.
B. MAINTAIN ACCESS TO EXISTING WALKWAYS, EXITS, AND OTHER FACILITIES USED BY OCCUPANTS OF ADJACENT BUILDINGS.
C. DO NOT CLOSE OR OBSTRUCT WALKWAYS, EXITS, OR OTHER FACILITIES USED BY OCCUPANTS OF ADJACENT BUILDINGS WITHOUT WRITTEN PERMISSION FROM AUTHORITIES HAVING JURISDICTION.
3. CONDITIONS EXISTING AT TIME OF INSPECTION FOR BIDDING PURPOSE WILL BE MAINTAINED BY OWNER AS FAR AS PRACTICAL.
4. HAZARDOUS MATERIALS: IT IS NOT EXPECTED THAT HAZARDOUS MATERIALS WILL BE ENCOUNTERED IN THE WORK.
A. HAZARDOUS MATERIALS WILL BE REMOVED BY OWNER BEFORE START OF THE WORK.
B. IF MATERIALS SUSPECTED OF CONTAINING HAZARDOUS MATERIALS ARE ENCOUNTERED, DO NOT DISTURB. IMMEDIATELY NOTIFY ARCHITECT AND OWNER. HAZARDOUS MATERIALS WILL BE REMOVED BY OWNER UNDER A SEPARATE CONTRACT.
5. ON-SITE STORAGE OR SALE OF REMOVED ITEMS OR MATERIALS IS NOT PERMITTED.
6. ARRANGE DEMOLITION SCHEDULE SO AS NOT TO INTERFERE WITH OWNER'S ON-SITE OPERATIONS OR OPERATIONS OF ADJACENT OCCUPIED BUILDINGS.

DIVISION 02-EXISTING CONDITIONS CONT.

PERFORMANCE REQUIREMENTS

- 1. REGULATORY REQUIREMENTS: COMPLY WITH GOVERNING EPA NOTIFICATION REGULATIONS BEFORE BEGINNING DEMOLITION. COMPLY WITH HAULING AND DISPOSAL REGULATIONS OF AUTHORITIES HAVING JURISDICTION.
2. STANDARDS: COMPLY WITH ASSE A10.6 AND NFPA 241.
SOILS MATERIALS:
1. SATISFACTORY SOILS: COMPLY WITH REQUIREMENTS IN SECTION 310200 "EARTH MOVING."
EXAMINATION:
1. VERIFY THAT UTILITIES HAVE BEEN DISCONNECTED AND CAPPED BEFORE STARTING DEMOLITION OPERATIONS.
2. ENGAGE A PROFESSIONAL ENGINEER TO PERFORM AN ENGINEERING SURVEY OF CONDITION OF BUILDING TO DETERMINE WHETHER REMOVING ANY ELEMENT MIGHT RESULT IN STRUCTURAL DEFICIENCY OR UNPLANNED COLLAPSE OF ANY PORTION OF STRUCTURE OR ADJACENT STRUCTURES DURING BUILDING DEMOLITION OPERATIONS.
3. INVENTORY AND RECORD THE CONDITION OF ITEMS TO BE REMOVED AND SALVAGED.

PREPARATION

- 1. REFRIGERANT: BEFORE STARTING DEMOLITION, REMOVE REFRIGERANT FROM MECHANICAL EQUIPMENT ACCORDING TO 40 CFR 82 AND REGULATIONS OF AUTHORITIES HAVING JURISDICTION.
2. SALVAGED ITEMS: COMPLY WITH THE FOLLOWING:
• CLEAN SALVAGED ITEMS OF DIRT AND DEMOLITION DEBRIS.
• PACK OR GRATE ITEMS AFTER CLEANING. IDENTIFY CONTENTS OF CONTAINERS.
• STORE ITEMS IN A SECURE AREA UNTIL DELIVERY TO OWNER.
• TRANSPORT ITEMS TO STORAGE AREA DESIGNATED BY OWNER.
• PROTECT ITEMS FROM DAMAGE DURING TRANSPORT AND STORAGE.

UTILITY SERVICES AND MECHANICAL/ELECTRICAL SYSTEMS

- 1. EXISTING UTILITIES TO BE DISCONNECTED, LOCATE, IDENTIFY, DISCONNECT, AND SEAL OR CAP OFF UTILITIES SERVING BUILDINGS AND STRUCTURES TO BE DEMOLISHED.
A. ARRANGE TO SHUT OFF UTILITIES WITH UTILITY COMPANIES.
B. IF REMOVAL, RELOCATION, OR ABANDONMENT OF UTILITY SERVICES WILL AFFECT ADJACENT OCCUPIED BUILDINGS, THEN PROVIDE TEMPORARY UTILITIES THAT BYPASS BUILDINGS AND STRUCTURES TO BE DEMOLISHED AND THAT MAINTAIN CONTINUITY OF SERVICE TO OTHER BUILDINGS AND STRUCTURES.
C. CUT OFF FIRE OR CONDUIT A MINIMUM OF 24 INCHES BELOW GRADE. CAP, VALVE, OR PLUG AND SEAL REMAINING PORTION OF FIRE OR CONDUIT AFTER BYPASSING ACCORDING TO REQUIREMENTS OF AUTHORITIES HAVING JURISDICTION.
D. DO NOT START DEMOLITION WORK UNTIL UTILITY DISCONNECTING AND SEALING HAVE BEEN COMPLETED AND VERIFIED IN WRITING.

PROTECTION

- 1. EXISTING FACILITIES: PROTECT ADJACENT WALKWAYS, LOADING DOCKS, BUILDING ENTRIES, AND OTHER BUILDING FACILITIES DURING DEMOLITION OPERATIONS. MAINTAIN EXITS FROM EXISTING BUILDINGS.
2. TEMPORARY SHORING: PROVIDE AND MAINTAIN INTERIOR AND EXTERIOR SHORING, BRACING, OR STRUCTURAL SUPPORT TO PRESERVE STABILITY AND PREVENT UNEXPECTED MOVEMENT OR COLLAPSE OF CONSTRUCTION BEING DEMOLISHED.
3. EXISTING UTILITIES TO REMAIN: MAINTAIN UTILITY SERVICES TO REMAIN AND PROTECT FROM DAMAGE DURING DEMOLITION OPERATIONS. DO NOT INTERRUPT EXISTING UTILITIES SERVING ADJACENT OCCUPIED OR OPERATING FACILITIES UNLESS AUTHORIZED IN WRITING BY OWNER AND AUTHORITIES HAVING JURISDICTION.
4. TEMPORARY PROTECTION: ERECT TEMPORARY PROTECTION, SUCH AS WALKS, FENCES, RAILINGS, CANOPIES, AND COVERED PASSAGEWAYS, WHERE REQUIRED BY AUTHORITIES HAVING JURISDICTION AND AS INDICATED. COMPLY WITH REQUIREMENTS IN SECTION 010500 "TEMPORARY FACILITIES AND CONTROLS."
A. PROTECT ADJACENT BUILDINGS AND FACILITIES FROM DAMAGE DUE TO DEMOLITION ACTIVITIES.
B. PROTECT EXISTING SITE IMPROVEMENTS, APPURTENANCES, AND LANDSCAPING TO REMAIN.
C. ERECT A PLAINLY VISIBLE FENCE AROUND DRIP LINE OF INDIVIDUAL TREES OR AROUND PERIMETER DRIP LINE OF GROUPS OF TREES TO REMAIN.
D. PROVIDE TEMPORARY BARRICADES AND OTHER PROTECTION REQUIRED TO PREVENT INJURY TO PEOPLE AND DAMAGE TO ADJACENT BUILDINGS AND FACILITIES TO REMAIN.
E. PROVIDE PROTECTION TO INSURE SAFE PASSAGE OF PEOPLE AROUND BUILDING DEMOLITION AREA AND TO AND FROM OCCUPIED PORTIONS OF ADJACENT BUILDINGS AND STRUCTURES.
F. PROTECT WALLS, WINDOWS, ROOFS, AND OTHER ADJACENT EXTERIOR CONSTRUCTION THAT ARE TO REMAIN AND THAT ARE EXPOSED TO BUILDING DEMOLITION OPERATIONS.
6. ERECT AND MAINTAIN DUSTPROOF PARTITIONS AND TEMPORARY ENCLOSURES TO LIMIT DUST, NOISE, AND DIRT MIGRATION TO OCCUPIED PORTIONS OF ADJACENT BUILDINGS.
5. REMOVE TEMPORARY BARRIERS AND PROTECTIONS WHERE HAZARDS NO LONGER EXIST. WHERE OPEN EXCAVATIONS OR OTHER HAZARDOUS CONDITIONS REMAIN, LEAVE TEMPORARY BARRIERS AND PROTECTIONS IN PLACE.

DEMOLITION

- 1. GENERAL: DEMOLISH INDICATED BUILDINGS AND SITE IMPROVEMENTS COMPLETELY. USE METHODS REQUIRED TO COMPLETE THE WORK WITHIN LIMITATIONS OF GOVERNING REGULATIONS AND AS FOLLOWS:
A. DO NOT USE CUTTING TORCHES UNTIL WORK AREA IS CLEARED OF FLAMMABLE MATERIALS. MAINTAIN PORTABLE FIRE-SUPPRESSION DEVICES DURING FLAME-CUTTING OPERATIONS.
B. MAINTAIN FIRE WATCH DURING AND FOR AT LEAST 15-MINUTE PERIOD AFTER FLAME-CUTTING OPERATIONS.
C. MAINTAIN ADEQUATE VENTILATION WHEN USING CUTTING TORCHES.
D. LOCATE BUILDING DEMOLITION EQUIPMENT AND REMOVE DEBRIS AND MATERIALS SO AS NOT TO IMPOSE EXCESSIVE LOADS ON SUPPORTING WALLS, FLOORS, OR FRAMING.
2. SITE ACCESS AND TEMPORARY CONTROLS: CONDUCT BUILDING DEMOLITION AND DEBRIS-REMOVAL OPERATIONS TO ENSURE MINIMUM INTERFERENCE WITH ROADS, STREETS, WALKS, WALKWAYS, AND OTHER ADJACENT OCCUPIED AND USED FACILITIES.
A. DO NOT CLOSE OR OBSTRUCT STREETS, WALKS, WALKWAYS, OR OTHER ADJACENT OCCUPIED OR USED FACILITIES WITHOUT PERMISSION FROM OWNER AND AUTHORITIES HAVING JURISDICTION. PROVIDE ALTERNATE ROUTES AROUND CLOSED OR OBSTRUCTED TRAFFICWAYS IF REQUIRED BY AUTHORITIES HAVING JURISDICTION.
B. USE WATER MIST AND OTHER SUITABLE METHODS TO LIMIT SPREAD OF DUST AND DIRT. COMPLY WITH GOVERNING ENVIRONMENTAL-PROTECTION REGULATIONS.
3. EXPLOSIVES: USE OF EXPLOSIVES IS NOT PERMITTED.
4. PROCEED WITH DEMOLITION OF STRUCTURAL FRAMING MEMBERS SYSTEMATICALLY, FROM HIGHER TO LOWER LEVEL. COMPLETE BUILDING DEMOLITION OPERATIONS ABOVE EACH FLOOR OR TIER BEFORE DISTURBING SUPPORTING MEMBERS ON THE NEXT LOWER LEVEL.
5. REMOVE DEBRIS FROM ELEVATED PORTIONS OF THE BUILDING BY CHUTE, HOIST, OR OTHER DEVICE THAT WILL CONVEY DEBRIS TO GRADE LEVEL IN A CONTROLLED DESCENT.
6. REMOVE BELOW-GRADE CONSTRUCTION, INCLUDING BASEMENTS, FOUNDATION WALLS, AND FOOTINGS, COMPLETELY.
7. EXISTING UTILITIES: DEMOLISH EXISTING UTILITIES AND BELOW-GRADE UTILITY STRUCTURES THAT ARE WITHIN 5 FEET OUTSIDE FOOTPRINT INDICATED FOR NEW CONSTRUCTION. ABANDON UTILITIES OUTSIDE THIS AREA.
8. HYDRAULIC ELEVATOR SYSTEMS: DEMOLISH AND REMOVE ELEVATOR SYSTEM, INCLUDING CYLINDER, FLANGER, NELL ASSEMBLY, STEEL NELL CASING AND LINER, OIL SUPPLY LINES, AND TANKS.
9. BELOW-GRADE AREAS: COMPLETELY FILL BELOW-GRADE AREAS AND VOIDS RESULTING FROM BUILDING DEMOLITION OPERATIONS WITH SATISFACTORY SOIL MATERIALS, RECYCLED PULVERIZED CONCRETE, RECYCLED PULVERIZED MASONRY, ACCORDING TO BACKFILL REQUIREMENTS IN SECTION 310200 "EARTH MOVING."
10. SITE GRADING: UNIFORMLY ROUGH GRADE AREA OF DEMOLISHED CONSTRUCTION TO A SMOOTH SURFACE. FREE FROM IRREGULAR SURFACE CHANGES. PROVIDE A SMOOTH TRANSITION BETWEEN ADJACENT EXISTING GRADES AND NEW GRADES.

DOCUMENT 02414 SELECTIVE DEMOLITION

MATERIALS OWNERSHIP

- 1. UNLESS OTHERWISE INDICATED, DEMOLITION WASTE BECOMES PROPERTY OF CONTRACTOR.
2. HISTORIC ITEMS, RELICS, ANTIQUES, AND SIMILAR OBJECTS INCLUDING, BUT NOT LIMITED TO, CORNERSTONES AND THEIR CONTENTS, COMMEMORATIVE PLAQUES AND TABLETS, AND OTHER ITEMS OF INTEREST OR VALUE TO OWNER THAT MAY BE UNCOVERED DURING DEMOLITION REMAIN THE PROPERTY OF OWNER.
3. CAREFULLY SALVAGE IN A MANNER TO PREVENT DAMAGE AND PROMPTLY RETURN TO OWNER.
INFORMATION SUBMITTALS:
1. ENGINEERING SURVEY: SUBMIT ENGINEERING SURVEY OF CONDITION OF BUILDING.
2. PROPOSED PROTECTION MEASURES: SUBMIT REPORT, INCLUDING DRAWINGS, THAT INDICATES THE MEASURES PROPOSED FOR PROTECTING INDIVIDUALS AND PROPERTY FOR ENVIRONMENTAL PROTECTION, FOR DUST CONTROL, AND/OR NOISE CONTROL. INDICATE PROPOSED LOCATIONS AND CONSTRUCTION OF BARRIERS.
3. ADJACENT BUILDINGS: DETAIL SPECIAL MEASURES PROPOSED TO PROTECT ADJACENT BUILDINGS TO REMAIN INCLUDING MEANS OF EGRESS FROM THOSE BUILDINGS.
4. SCHEDULE OF BUILDING DEMOLITION ACTIVITIES WITH STARTING AND ENDING DATES FOR EACH ACTIVITY.
5. PRE-DEMOLITION PHOTOGRAPHS OR VIDEO.
6. STATEMENT OF REFRIGERANT RECOVERY, SIGNED BY REFRIGERANT RECOVERY TECHNICIAN.

CLOSEOUT SUBMITTALS

- 1. INVENTORY OF ITEMS THAT HAVE BEEN REMOVED AND SALVAGED.

DIVISION 02-EXISTING CONDITIONS CONT.

QUALITY ASSURANCE

- 1. REFRIGERANT RECOVERY TECHNICIAN QUALIFICATIONS: CERTIFIED BY EPA-APPROVED CERTIFICATION PROGRAM.
FIELD CONDITIONS:
1. OWNER WILL OCCUPY PORTIONS OF BUILDING IMMEDIATELY ADJACENT TO SELECTIVE DEMOLITION AREA. CONDUCT SELECTIVE DEMOLITION SO OWNER'S OPERATIONS WILL NOT BE DISRUPTED.
2. CONDITIONS EXISTING AT TIME OF INSPECTION FOR BIDDING PURPOSE WILL BE MAINTAINED BY OWNER AS FAR AS PRACTICAL.
3. NOTIFY ARCHITECT OF DISCREPANCIES BETWEEN EXISTING CONDITIONS AND DRAWINGS BEFORE PROCEEDING WITH SELECTIVE DEMOLITION.
4. HAZARDOUS MATERIALS: IT IS NOT EXPECTED THAT HAZARDOUS MATERIALS WILL BE ENCOUNTERED IN THE WORK.
A. HAZARDOUS MATERIALS WILL BE REMOVED BY OWNER BEFORE START OF THE WORK.
B. IF SUSPECTED HAZARDOUS MATERIALS ARE ENCOUNTERED, DO NOT DISTURB. IMMEDIATELY NOTIFY ARCHITECT AND OWNER. HAZARDOUS MATERIALS WILL BE REMOVED BY OWNER UNDER A SEPARATE CONTRACT.
5. STORAGE OR SALE OF REMOVED ITEMS OR MATERIALS ON-SITE IS NOT PERMITTED.
6. UTILITY SERVICE: MAINTAIN EXISTING UTILITIES INDICATED TO REMAIN IN SERVICE AND PROTECT THEM AGAINST DAMAGE DURING SELECTIVE DEMOLITION OPERATIONS.
7. MAINTAIN FIRE-PROTECTION FACILITIES IN SERVICE DURING SELECTIVE DEMOLITION OPERATIONS.
8. ARRANGE SELECTIVE DEMOLITION SCHEDULE SO AS NOT TO INTERFERE WITH OWNER'S OPERATIONS.

WARRANTY

- 1. EXISTING WARRANTIES: REMOVE, REPLACE, PATCH, AND REPAIR MATERIALS AND SURFACES CUT OR DAMAGED DURING SELECTIVE DEMOLITION, BY METHODS AND WITH MATERIALS AND USING APPROVED CONTRACTORS SO AS NOT TO VOID EXISTING WARRANTIES.

PERFORMANCE REQUIREMENTS

- 1. REGULATORY REQUIREMENTS: COMPLY WITH GOVERNING EPA NOTIFICATION REGULATIONS BEFORE BEGINNING DEMOLITION. COMPLY WITH HAULING AND DISPOSAL REGULATIONS OF AUTHORITIES HAVING JURISDICTION.
2. STANDARDS: COMPLY WITH ASSE A10.6 AND NFPA 241.

EXAMINATION

- 1. VERIFY THAT UTILITIES HAVE BEEN DISCONNECTED AND CAPPED BEFORE STARTING DEMOLITION OPERATIONS.
2. ENGAGE A PROFESSIONAL ENGINEER TO PERFORM AN ENGINEERING SURVEY OF CONDITION OF BUILDING TO DETERMINE WHETHER REMOVING ANY ELEMENT MIGHT RESULT IN STRUCTURAL DEFICIENCY OR UNPLANNED COLLAPSE OF ANY PORTION OF STRUCTURE OR ADJACENT STRUCTURES DURING BUILDING DEMOLITION OPERATIONS.
3. INVENTORY AND RECORD THE CONDITION OF ITEMS TO BE REMOVED AND SALVAGED.

PREPARATION

- 1. REFRIGERANT: BEFORE STARTING DEMOLITION, REMOVE REFRIGERANT FROM MECHANICAL EQUIPMENT ACCORDING TO 40 CFR 82 AND REGULATIONS OF AUTHORITIES HAVING JURISDICTION.

UTILITY SERVICES AND MECHANICAL/ELECTRICAL SYSTEMS

- 1. EXISTING SERVICES/SYSTEMS TO REMAIN: MAINTAIN SERVICES/SYSTEMS INDICATED TO REMAIN AND PROTECT THEM AGAINST DAMAGE.
2. EXISTING SERVICES/SYSTEMS TO BE REMOVED, RELOCATED, OR ABANDONED: LOCATE, IDENTIFY, DISCONNECT, AND SEAL OR CAP OFF UTILITY SERVICES AND MECHANICAL/ELECTRICAL SYSTEMS SERVING AREAS TO BE SELECTIVELY DEMOLISHED.

UTILITY SERVICES AND MECHANICAL/ELECTRICAL SYSTEMS CONTINUED

- A. OWNER WILL ARRANGE TO SHUT OFF INDICATED SERVICES/SYSTEMS WHEN REQUESTED BY CONTRACTOR.
B. ARRANGE TO SHUT OFF UTILITIES WITH UTILITY COMPANIES.
C. IF SERVICES/SYSTEMS ARE REQUIRED TO BE REMOVED, RELOCATED, OR ABANDONED, PROVIDE TEMPORARY SERVICES/SYSTEMS THAT BYPASS AREA OF SELECTIVE DEMOLITION AND THAT MAINTAIN CONTINUITY OF SERVICES/SYSTEMS TO OTHER PARTS OF BUILDING.
D. DISCONNECT, DEMOLISH, AND REMOVE FIRE-SUPPRESSION SYSTEMS, PLUMBING, AND HVAC SERVICES, EQUIPMENT, AND COMPONENTS INDICATED ON DRAWINGS TO BE REMOVED.
E. PIPING TO BE REMOVED: REMOVE PORTION OF PIPING INDICATED TO BE REMOVED AND CAP OR PLUG REMAINING PIPING WITH SAME OR COMPATIBLE PIPING MATERIAL.
F. PIPING TO BE ABANDONED IN PLACE: DRAIN PIPING AND CAP OR PLUG PIPING WITH SAME OR COMPATIBLE PIPING MATERIAL AND LEAVE IN PLACE.
G. EQUIPMENT TO BE REMOVED: DISCONNECT AND CAP SERVICES AND REMOVE EQUIPMENT.
H. EQUIPMENT TO BE REMOVED AND REINSTALLED: DISCONNECT AND CAP SERVICES AND REMOVE, CLEAN, AND STORE EQUIPMENT, WHEN APPROPRIATE, REINSTALL, RECONNECT, AND MAKE EQUIPMENT OPERATIONAL.
I. EQUIPMENT TO BE REMOVED AND SALVAGED: DISCONNECT AND CAP SERVICES AND REMOVE EQUIPMENT AND DELIVER TO OWNER.
J. DUCTS TO BE REMOVED: REMOVE PORTION OF DUCTS INDICATED TO BE REMOVED AND PLUG REMAINING DUCTS WITH SAME OR COMPATIBLE DUCTWORK MATERIAL.
K. DUCTS TO BE ABANDONED IN PLACE: CAP OR PLUG DUCTS WITH SAME OR COMPATIBLE DUCTWORK MATERIAL AND LEAVE IN PLACE.

PROTECTION

- 1. TEMPORARY PROTECTION: PROVIDE TEMPORARY BARRICADES AND OTHER PROTECTION REQUIRED TO PREVENT INJURY TO PEOPLE AND DAMAGE TO ADJACENT BUILDINGS AND FACILITIES TO REMAIN.
2. TEMPORARY SHORING: DESIGN, PROVIDE, AND MAINTAIN SHORING, BRACING, AND STRUCTURAL SUPPORTS AS REQUIRED TO PRESERVE STABILITY AND PREVENT MOVEMENT, SETTLEMENT, OR COLLAPSE OF CONSTRUCTION AND FINISHES TO REMAIN, AND TO PREVENT UNEXPECTED OR UNCONTROLLED MOVEMENT OR COLLAPSE OF CONSTRUCTION BEING DEMOLISHED.
3. REMOVE TEMPORARY BARRICADES AND PROTECTIONS WHERE HAZARDS NO LONGER EXIST.

SELECTIVE DEMOLITION

- 1. GENERAL: DEMOLISH AND REMOVE EXISTING CONSTRUCTION ONLY TO THE EXTENT REQUIRED BY NEW CONSTRUCTION AND AS INDICATED. USE METHODS REQUIRED TO COMPLETE THE WORK WITHIN LIMITATIONS OF GOVERNING REGULATIONS AND AS FOLLOWS:
A. NEATLY CUT OPENINGS AND HOLES PLUMB, SQUARE, AND TRUE TO DIMENSIONS REQUIRED. USE CUTTING METHODS LEAST LIKELY TO DAMAGE CONSTRUCTION TO REMAIN OR ADJOINING CONSTRUCTION. USE HAND TOOLS OR SMALL POWER TOOLS DESIGNED FOR SAVING OR GRINDING, NOT HAMMERS AND CHOPPERS. TEMPORARILY COVER OPENINGS TO REMAIN.
B. CUT OR DRILL FROM THE EXPOSED OR FINISHED SIDE INTO CONCEALED SURFACES TO AVOID MARKING EXISTING FINISHED SURFACES.
C. DO NOT USE CUTTING TORCHES UNTIL WORK AREA IS CLEARED OF FLAMMABLE MATERIALS. AT CONCEALED SPACES, SUCH AS DUCT AND FIRE INTERIORS, VERIFY CONDITION AND CONTENTS OF HIDDEN SPACE BEFORE STARTING FLAME-CUTTING OPERATIONS. MAINTAIN PORTABLE FIRE-SUPPRESSION DEVICES DURING FLAME-CUTTING OPERATIONS.
D. MAINTAIN FIRE WATCH DURING AND FOR AT LEAST 2 HOURS AFTER FLAME-CUTTING OPERATIONS.
E. LOCATE SELECTIVE DEMOLITION EQUIPMENT AND REMOVE DEBRIS AND MATERIALS SO AS NOT TO IMPOSE EXCESSIVE LOADS ON SUPPORTING WALLS, FLOORS, OR FRAMING.
F. DISPOSE OF DEMOLISHED ITEMS AND MATERIALS PROMPTLY, COMPLY WITH REQUIREMENTS IN SECTION 01414 CONSTRUCTION WASTE MANAGEMENT AND DISPOSAL.
2. SITE ACCESS AND TEMPORARY CONTROLS: CONDUCT SELECTIVE DEMOLITION AND DEBRIS-REMOVAL OPERATIONS TO ENSURE MINIMUM INTERFERENCE WITH ROADS, STREETS, WALKS, WALKWAYS, AND OTHER ADJACENT OCCUPIED AND USED FACILITIES.
3. REMOVED AND SALVAGED ITEMS:
A. CLEAN SALVAGED ITEMS.
B. PACK OR GRATE ITEMS AFTER CLEANING. IDENTIFY CONTENTS OF CONTAINERS.
C. STORE ITEMS IN A SECURE AREA UNTIL DELIVERY TO OWNER.
D. TRANSPORT ITEMS TO OWNER'S STORAGE AREA DESIGNATED BY OWNER.
E. PROTECT ITEMS FROM DAMAGE DURING TRANSPORT AND STORAGE.
4. REMOVED AND REINSTALLED ITEMS:
A. CLEAN AND REPAIR ITEMS TO FUNCTIONAL CONDITION ADEQUATE FOR INTENDED REUSE.
B. PACK OR GRATE ITEMS AFTER CLEANING AND REPAIRING. IDENTIFY CONTENTS OF CONTAINERS.
C. PROTECT ITEMS FROM DAMAGE DURING TRANSPORT AND STORAGE.
D. REINSTALL ITEMS IN LOCATIONS INDICATED. COMPLY WITH INSTALLATION REQUIREMENTS FOR NEW MATERIALS AND EQUIPMENT. PROVIDE CONNECTIONS, SUPPORTS, AND MISCELLANEOUS MATERIALS NECESSARY TO MAKE ITEM FUNCTIONAL FOR USE INDICATED.
5. EXISTING ITEMS TO REMAIN: PROTECT CONSTRUCTION INDICATED TO REMAIN AGAINST DAMAGE AND SOILING DURING SELECTIVE DEMOLITION. WHEN PERMITTED BY ARCHITECT, ITEMS MAY BE REMOVED TO A SUITABLE PROTECTED STORAGE LOCATION DURING SELECTIVE DEMOLITION AND CLEANED AND REINSTALLED IN THEIR ORIGINAL LOCATION AFTER SELECTIVE DEMOLITION OPERATIONS ARE COMPLETE.

CODE COMPLIANCE

ALL CONSTRUCTION TO COMPLY WITH THE NEW YORK CITY ADMINISTRATIVE CODE TITLE 28 AND ALL APPLICABLE SUB-CODES.

Table with 2 columns: 2008 THE CITY OF NEW YORK BUILDINGS CODE, 2008 THE CITY OF NEW YORK MECHANICAL CODE; 2008 THE CITY OF NEW YORK FUEL GAS CODE, 2011 THE CITY OF NEW YORK ELECTRICAL CODE; 2008 THE CITY OF NEW YORK ENERGY AND CONSERVATION CODE, 2008 THE CITY OF NEW YORK PLUMBING CODE

NYC DOB- ALTERATION TYPE II- PARTIAL DEMOLITION

BUILDING INFORMATION

Table with 2 columns: EXISTING BUILDING USE GROUP, EXISTING TYPE OF CONSTRUCTION; EXISTING FIRST FLOOR AREA, EXISTING CELLAR AREA, EXISTING LOT AREA, EXISTING BUILDING HEIGHT; DOMINANT USE - M - MERCANTILE 51 - STORAGE; IIB 14,680 SF, 2404 SF, 16,260 SF, 1 - STORY, 120'-0" (T.O. PARAPET), 83'-4" (T.O. ROOF DECK)

ALTERATION TYPE I- SUBSEQUENT FILING CRITERIA

BUILDING INFORMATION

AN ALTERATION TYPE I APPLICATION WILL BE FILED SUBSEQUENT TO THE FILING DRAWINGS HEREWITH CONFORMING WITH TECHNICAL POLICY AND PROCEDURE NOTICE #9/00.

SEE BELOW FOR CONFORMANCE CALCULATIONS:

Table with 4 columns: EXTERIOR WALL LOCATION, EXISTING AREA, EXISTING TO BE REMOVED, EXISTING TO REMAIN. Rows include North, East, South, West Elevation and Percent of Exterior Walls to Remain.

FOUNDATION SYSTEM

Table with 2 columns: EXISTING TO REMAIN, EXISTING TO REMAIN. Rows include North, East, South, West Elevation and Percent of Foundation System to Remain.

I STEVEN GAMBINO, RA, ATTEST THAT THE DEMOLITION AS DESCRIBED HEREWITH WILL NOT EXCEED REMOVAL OF MORE THAN 50% OF THE AREA OF THE EXISTING WALLS. THE ABOVE CALCULATIONS AND DRAWINGS INCLUDED IN THIS SUBMISSION SUPPORT MY STATEMENT.



STEVEN GAMBINO, RA DATE

LIST OF DRAWINGS

Table with 2 columns: T100 TITLE SHEET, D4000 EXISTING EAST ELEVATION, EXISTING SOUTH ELEVATION, CONSTRUCTION FENCE PLAN, & TYPICAL CONSTRUCTION FENCE DETAILS; D4101 GENERAL DEMOLITION NOTES, DEMOLITION PLAN, & EXISTING CELLAR PLAN; D4102 EXISTING LONGITUDINAL SECTION, EXISTING EAST ELEVATION, & EXISTING SOUTH ELEVATION; D4103 EXISTING NORTH ELEVATION, EXISTING WEST ELEVATION

DRAWING LEGEND

- DENOTES EXISTING WALL TO REMAIN
--- DENOTES WALL AND ELEMENTS TO BE REMOVED
--- DENOTES CONSTRUCTION FENCE
--- DENOTES PROPERTY LINE

DOOR DRAWING SYMBOLS


Diagram showing symbols for Door, Partitions, Detail, Section, Room, Toilet Accessory, Elevation, and Direction of View.

MATERIAL LEGEND

Diagram showing material symbols for Concrete Masonry Unit, Steel, Rough Wood, Batt/Market Insulation, Rigid Insulation, Dressed Wood, Porous Fill, Earth.

LOCATION PLAN

SITE PLAN INFORMATION IS TAKEN FROM THE NYC DEPARTMENT OF FINANCE TAX MAPS SCALE: 1"=20'-0"

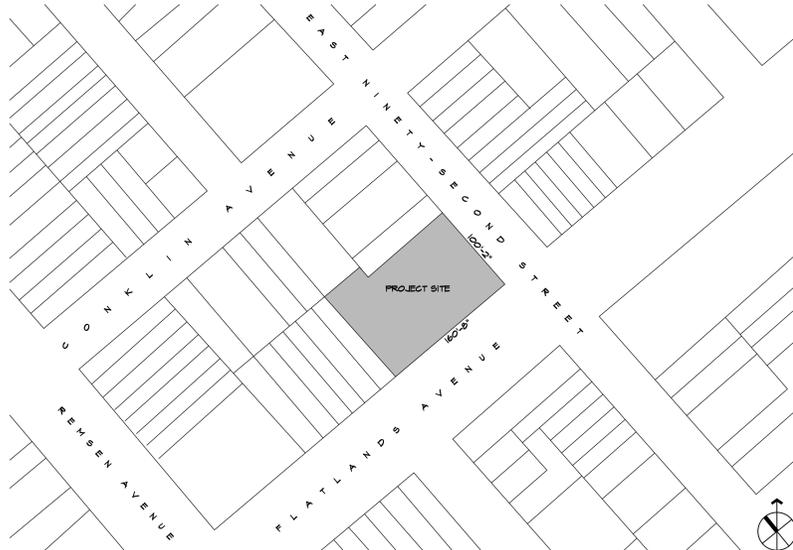


GAMBINO + LAPORTA ARCHITECTURE, D.P.C. 1298 RICHMOND ROAD, STATEN ISLAND, NY 10314. PHONE: 718.667.4692 FAX: 718.667.1196 EMAIL: STUDIO@GLARCH.COM WWW.GLARCH.COM

Table with columns: NO., DATE, DESCRIPTION, DRAWN BY, CHECKED BY, APPROVED BY. Includes entries for D4100, D4101, D4102, D4103.


Table with columns: NO., DATE, DESCRIPTION, DRAWN BY, CHECKED BY, APPROVED BY. Includes entries for D4100, D4101, D4102, D4103.

9029 FLATLANDS AVENUE, 156 EAST 7TH STREET, BROOKLYN, NY 11226. POLIZZOTTO REALTY, 4811 18TH AVENUE, BROOKLYN, NY 11234.


TITLE SHEET AS NOTED. 266EP14 GLA14-0210. ML, T.J.L. T100.00 01 OF 05.

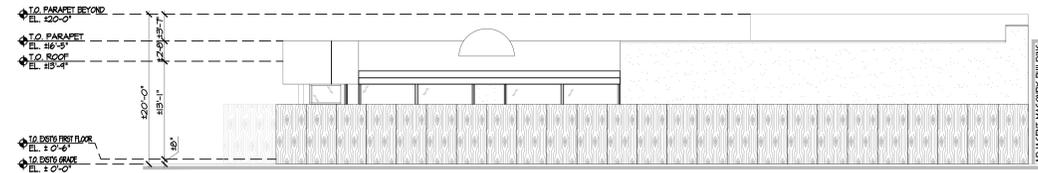


7 EXST'G EAST ELEVATION  
1/8" = 1'-0"

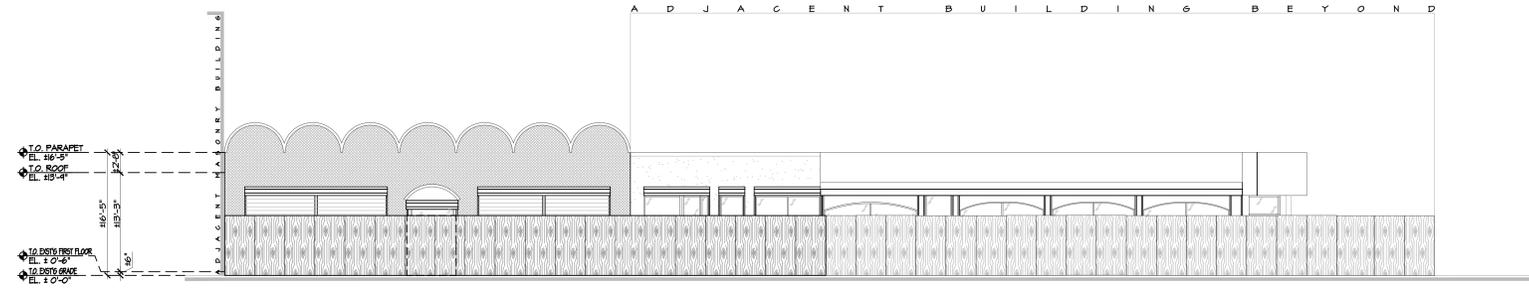


6 EXST'G SOUTH ELEVATION  
1/8" = 1'-0"

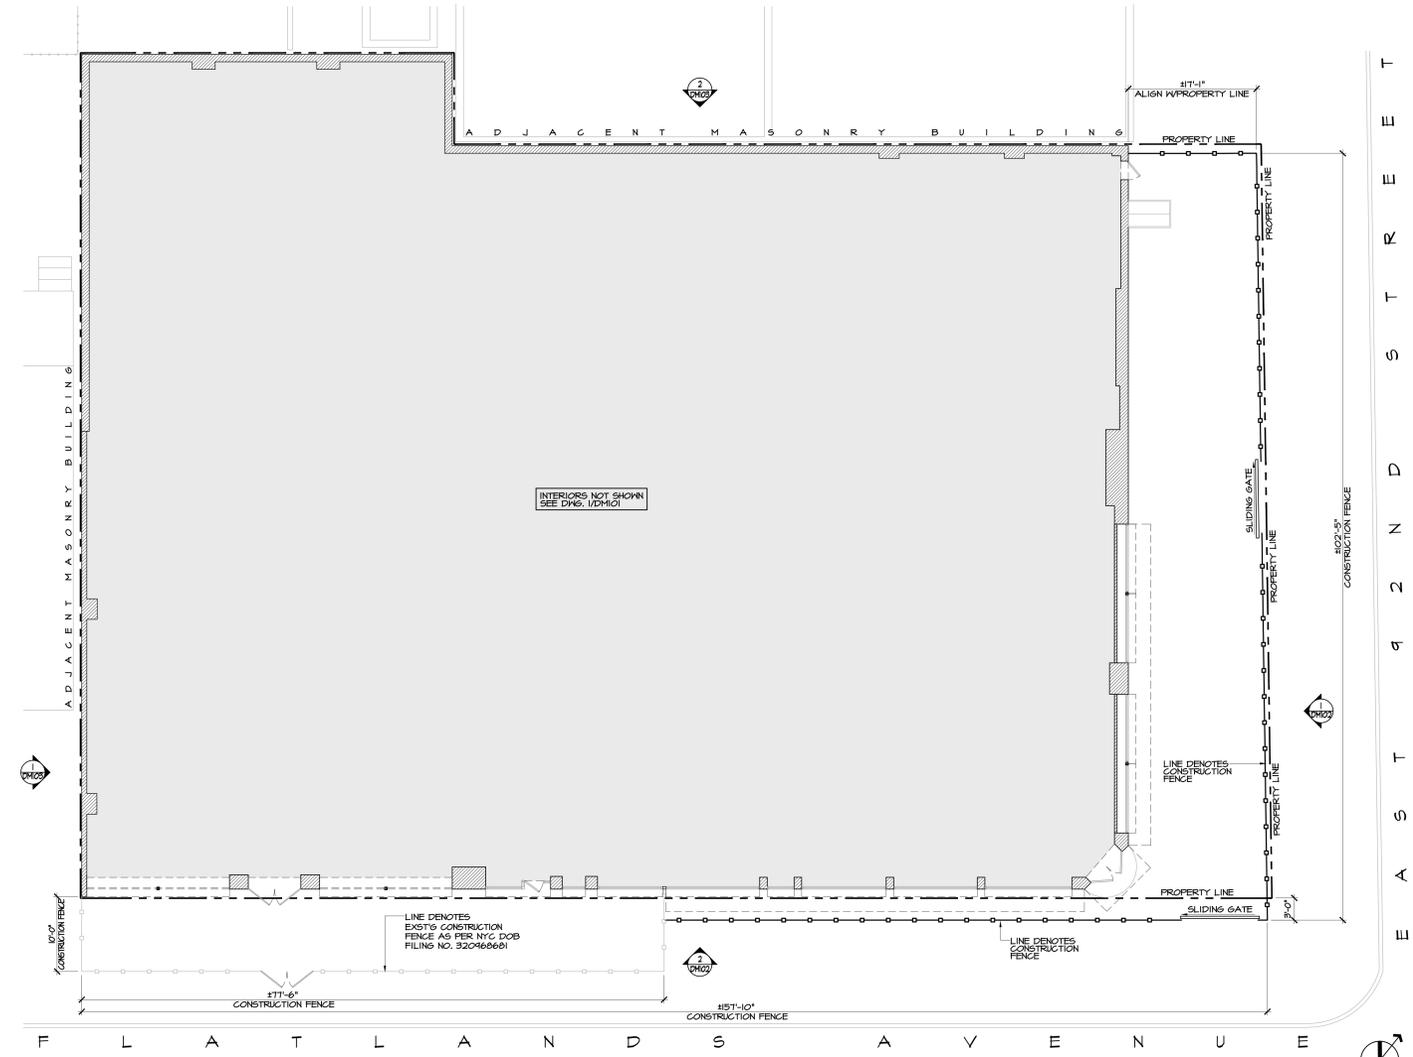


5 CONSTRUCTION FENCE PLAN  
1/8" = 1'-0"

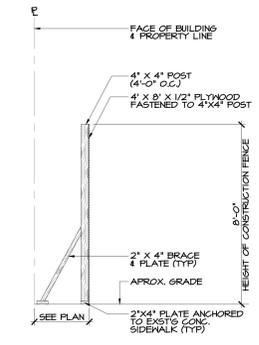


4 TYPICAL GATE PLAN DETAIL  
1/8" = 1'-0"



3 TYPICAL GATE PLAN DETAIL  
1/8" = 1'-0"

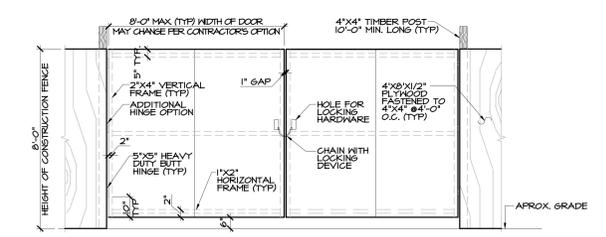

2 TYPICAL CONSTRUCTION GATE DETAIL  
1/8" = 1'-0"

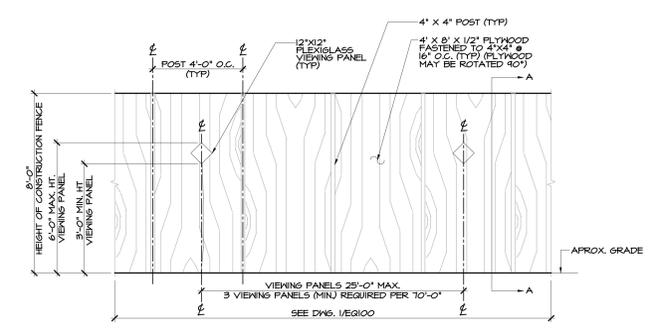

1 TYPICAL CONSTRUCTION FENCE DETAIL  
1/8" = 1'-0"



**GAMBINO + LAPORTA**  
**ARCHITECTURE, DPC**  
129 R. RICHMOND ROAD, STATEN ISLAND, NY 10314  
PHONE: 718.667.6692 FAX: 718.667.1196 EMAIL: STUDIO@GLARCH.COM  
W W W . G L A . A R C H . C O M



NO.	DATE	DESCRIPTION
1	08/11/11	ISSUED FOR PERMITS
2		
3		
4		
5		
6		
7		
8		
9		
10		
11		
12		
13		
14		
15		
16		
17		
18		
19		
20		
21		
22		
23		
24		
25		
26		
27		
28		
29		
30		
31		
32		
33		
34		
35		
36		
37		
38		
39		
40		
41		
42		
43		
44		
45		

PROJECT	9029 FLATLANDS AVENUE
BLOCK NO. & 1/4	
LOT NO.	
DATE	08/11/11
SCALE	AS NOTED
PROJECT NO.	266EPI4
CLIENT	DM100.00
DATE	02.07.05

9029 FLATLANDS AVENUE  
BLOCK NO. & 1/4  
LOT NO.  
BIN NO. 3229441  
166 EAST 42ND STREET  
BROOKLYN, NY 11236  
POLIZZOTTO REALTY  
6411 18TH AVENUE  
BROOKLYN, NY 11204

EXIST'G EAST ELEVATION  
EXIST'G SOUTH ELEVATION  
DEMOLITION PLAN &  
TYPICAL CONSTRUCTION FENCE DETAILS  
SCALE: AS NOTED  
SEAL AND SIGNATURE

SEVER GAMBINO #1  
266EPI4  
GLA14-0210  
ML  
T.J.L.  
DM100.00  
02.07.05

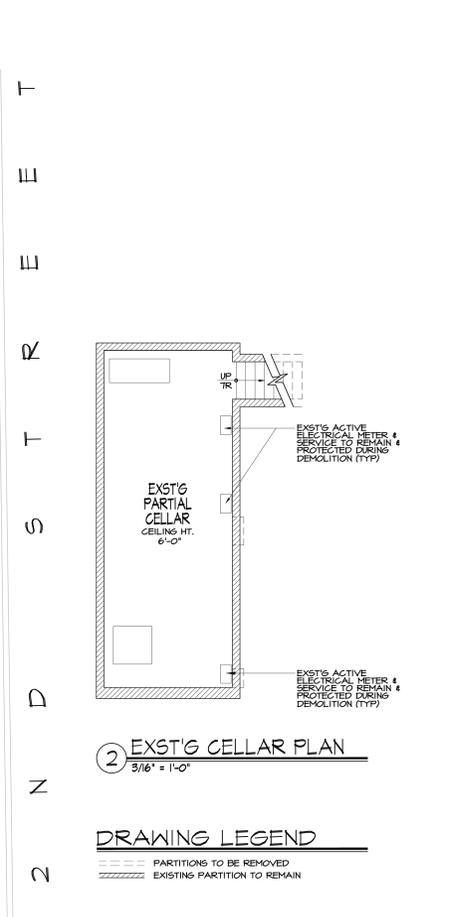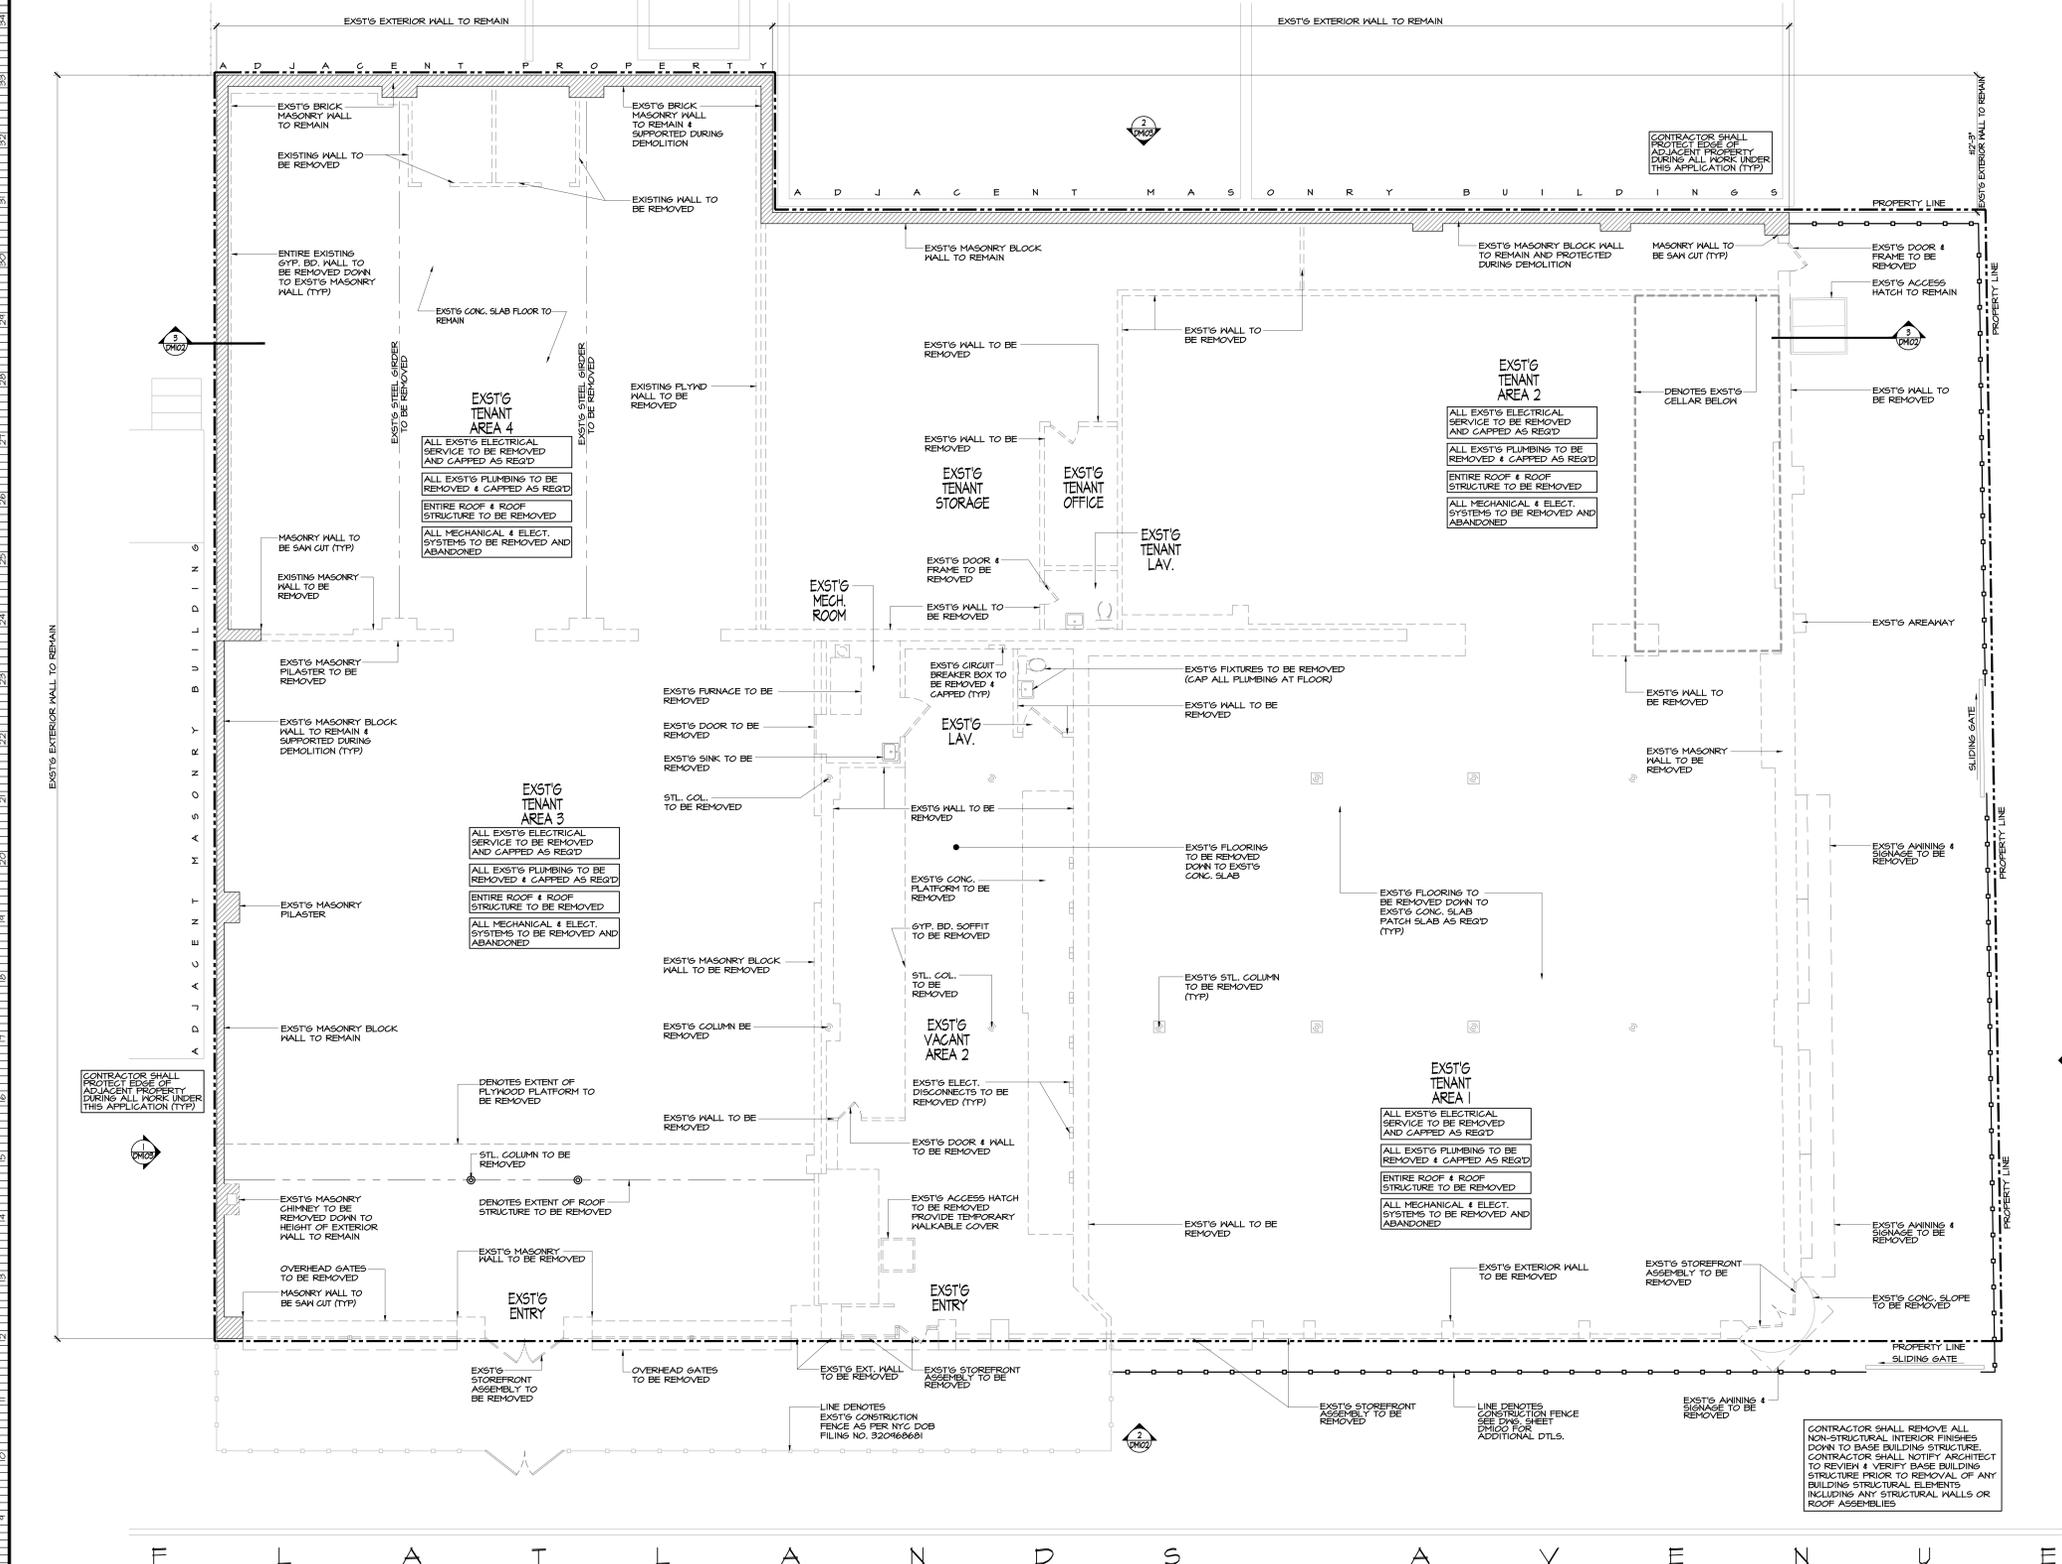

2 EXIST'G CELLAR PLAN  
3/16" = 1'-0"

**DRAWING LEGEND**

--- PARTITIONS TO BE REMOVED

--- EXISTING PARTITION TO REMAIN

1 DEMOLITION PLAN  
3/16" = 1'-0"

**GENERAL DEMOLITION NOTES**

- ANY ERRORS, OMISSIONS, OR UNUSUAL CONDITIONS TO BE REPORTED TO GAMBINO + LAPORTA ARCHITECTURE, DPC, IMMEDIATELY.
- DEMOLITION OPERATIONS ARE TO BE CONDUCTED IN ACCORDANCE WITH CURRENT APPROPRIATE OSHA RULES AND 2008 NEW YORK CITY BUILDING CODE SECTION BC 3306.
- BC 3306.2: DEMOLITION OPERATIONS SHALL NOT COMMENCE UNTIL THE APPLICABLE PEDESTRIAN AND ADJOINING PROPERTY IS IN PLACE AS REQUIRED.
- BC 3306.3.2: ADJOINING PROPERTY OWNERS SHALL BE NOTIFIED OF UPCOMING DEMOLITION OPERATIONS IN WRITING NOT LESS THAN 10 DAYS PRIOR TO THE SCHEDULING STARTING DATE OF THE DEMOLITION. THE WRITTEN NOTICE SHALL PROVIDE A DESCRIPTION OF THE WORK TO BE PERFORMED, THE TIME FRAME AND SCHEDULE, AND CONTACT INFORMATION OF THE PERSON CAUSING THE DEMOLITION AND OF THE DEPARTMENT.
- BC 3306.4: WHERE MECHANICAL DEMOLITION EQUIPMENT OTHER THAN HANDHELD DEVICES IS TO BE USED IN THE FULL OR PARTIAL DEMOLITION OF A BUILDING OR IS TO BE USED TO REMOVE DEBRIS OR MOVE MATERIAL, APPROVAL OF THE COMMISSIONER FOR THE USE OF MECHANICAL DEMOLITION EQUIPMENT MUST BE OBTAINED PRIOR TO THE COMMENCEMENT OF DEMOLITION OPERATIONS.
- BC 3306.4.3: DUST PRODUCING OPERATIONS SHALL BE NETTED DOWN TO THE EXTENT NECESSARY TO CONTROL THE DUST.
- CONTRACTOR IS RESPONSIBLE FOR FIELD VERIFICATION AND PROTECTION OF THE UTILITIES DURING DEMOLITION. CONTRACTOR SHALL TAKE PRECAUTIONS TO PREVENT ANY ADJACENT EXISTING STRUCTURE AND ABOVE GROUND UTILITIES FROM BEING DAMAGED DURING DEMOLITION.
- BC 3303.5.2: NO MATERIAL SHALL BE DROPPED OR THROWN OUTSIDE THE EXTERIOR WALLS OF A BUILDING.
- PROVIDE/ MAINTAIN EGRESS PATHS THROUGHOUT DEMOLITION.
- DEMOLISHED MATERIALS, UNLESS OTHERWISE NOTED, SHALL BECOME THE PROPERTY OF THE CONTRACTOR AND SHALL BE DISPOSED OF OFF SITE ON A REGULAR BASIS AND IN A LEGAL MANNER. (SEE TITLE SHEET FOR ADDITIONAL NOTES).
- SECURE SITE WITH CONSTRUCTION FENCES THAT MEET THE REQUIREMENTS OF SECTION BC 3307.1.
- BEFORE COMMENCEMENT OF ACTUAL DEMOLITION, ALL AREAS SHALL BE THOROUGHLY CLEANED OF COMBUSTIBLE MATERIALS AND DEBRIS.

**DEMOLITION DEBRIS NOTES**

- LIST OF DECONSTRUCTION MATERIALS - POTENTIAL APPLICATION FOR RECYCLING MATERIALS:
- ALUMINUM STRAPS, AND SHEET. RECYCLE AS A METAL.
  - ASPHALT: BREAK UP AND TRANSPORT ASPHALT-TO-ASPHALT RECYCLING FACILITY OR RECYCLING SITE.
  - BRICK: CAN BE REUSED IF WHOLE. CRUSHED FOR USE AS LANDSCAPE COVER, SUB-BASE MATERIAL, OR FILL.
  - BUILDING COMPONENT AND FIXTURES: WINDOWS, DOORS, CABINETS, HARDWARE, PLUMBING AND ELECTRICAL FIXTURES MAY BE SALVAGED. PORCELAIN PLUMBING FIXTURES MAY BE CRUSHED FOR FILL.
  - CARPET AND CARPET PAD, STORE CLEAN, DRY, CARPET AND PAD IN A CLOSED CONTAINER OR TRAILER. CARPET MAY BE ABLE TO BE REUSED OR RECYCLED IF SUFFICIENT QUANTITIES ARE GENERATED.
  - CEILING PANEL: IF SUFFICIENT QUANTITIES ARE GENERATED, SORT BY SIZE PALLETIZE, AND SHINK-N-RAP FOR SHIPMENT TO AND RECYCLING BY A CEILING TILE MANUFACTURER.
  - CONCRETE: CAN BE CRUSHED AND GRADED FOR USE AS RIPRAP, AGGREGATE, SUB-BASE MATERIAL, OR FILL. NEUTRALIZE ALKALINITY IF PLANTING ABOVE. REMOVE.
  - REINFORCEMENT AND OTHER METALS FROM CONCRETE AND SORT WITH OTHER METALS.
  - COPPER PIPE AND ACCESSORIES: RECYCLE AS A METAL.
  - CORRUGATED CARDBOARD AND PAPER: SEPARATE FOR RECYCLING INTO NEW PAPER PRODUCTS. PAINTED, NAIRED OR MUDDY CARDBOARD OR PAPER IS UNSUITABLE FOR RECYCLING AND SHOULD BE DISCARDED.
  - DIMENSIONAL LUMBER, ORIENTED STRAND BOARD, PLYWOOD, GRATES, AND PALLETS: SORT LARGER PIECES FOR REUSE. WOOD UNSUITABLE FOR REUSE MAY BE USED TO MANUFACTURE PARTICULATE BOARD AND OTHER COMPOSITE WOOD PRODUCTS. CHIP OR SHRED WOOD FOR USE AS ANIMAL BEDDING, LANDSCAPE USE, GROUND COVER, MULCH, COMPOST, FILL, OR PROCESS FUEL. DO NOT CHIP OR SHRED STAINED, PAINTED OR TREATED WOOD. SOME RECYCLERS HAVE EQUIPMENT TO REMOVE NAILS.
  - DOORS AND HARDWARE: IF SEPARATED FOR REUSE, BRACE OPEN END OF DOOR FRAMES.
  - GLASS CONTAINERS: RECYCLE AS GLASS.
  - GYPSSUM BOARD: GYPSSUM WALLBOARD TO BE PROCESS AND LAND SPREAD MUST BE NEB AND CLEAN CONSTRUCTION SCRAP FREE OF TAPE, JOINT COMPOUNDS, PAINT, NAILS, SCREWS, OR OTHER CONTAMINANTS. ONLY REGULAR 1/2" DRYWALL, TYPE "X" DRYWALL, AND PLASTER BASE (STANDARD BLUE BOARD) MAY BE USED FOR A SOIL AMENDMENT. THE FOLLOWING PAPER-FACED GYPSSUM PANEL CAN NOT BE USED AS A SOIL AMENDMENT: PR (GREEN BOARD), SHEATHING (BROWNBACK BOARD), MOLD RESISTANT PANELS OR SPECIALTY TYPE "X". THESE CONTAIN ADDITIVES WHICH MAY NOT BE SUITABLE AS A SOIL AMENDMENT.
  - LAND CLEARING DEBRIS: CAN BE CHIPPED OR SHREDDED FOR USE AS A GROUND COVER, MULCH, COMPOST, FILL, OR PROCESS FUEL.
  - LIGHTING FIXTURES: SEPARATE LAMPS BY TYPE AND PROTECT FROM BREAKAGE. FLUORESCENT TUBES MUST BE RECYCLED BY LAW.
  - MISCELLANEOUS FERROUS AND NONFERROUS METALS: SEPARATE FOR RECYCLING. BANDING, STUD CUTS, CEILING GRID, DUCTWORK, CONDUIT, REBAR, ROOFING, PIPE, SHEET METALS, EXTRUDED METALS, CASTINGS, MISCELLANEOUS STEEL SHAPES, AND OTHER METAL PARTS.
  - PIPING: IF SEPARATED FOR REUSE, REDUCE PIPING TO STRAIGHT LENGTHS AND STORE BY TYPE AND SIZE. SEPARATE SUPPORTS, HANGERS, VALVES, SPRINKLER HEADS, AND OTHER COMPONENTS BY TYPE AND SIZE.
  - PRECAST CONCRETE PANELS: MAY BE ABLE TO BE CRUSHED AND USED FOR EROSION CONTROL OR LANDSCAPE FEATURES.
  - SHEET METAL SCRAP AND METAL DUCT ACCESSORIES: RECYCLE AS A METAL.
  - STRUCTURAL STEEL: CAN BE USED IN THE MANUFACTURE OF STRUCTURAL STEEL.
  - VINYL: SIDING, WINDOW EXTRUSIONS, FLOOR TILES, AND SHEET FLOORING MAY BE ABLE TO BE SEPARATED FOR RECYCLING INTO NEW VINYL PRODUCTS.

**GAMBINO + LAPORTA ARCHITECTURE, DPC**  
129 R. RICHMOND ROAD, STATEN ISLAND, NY 10314  
PHONE: 718.667.4692 FAX: 718.667.1196 EMAIL: STUDIO@GLARCH.COM

9029 FLATLANDS AVENUE  
156 EAST 42ND STREET  
BROOKLYN, NY 11236


POLIZOTTO REALTY  
6411 18TH AVENUE  
BROOKLYN, NY 11234

266EP14 GLA14-0210  
ML  
T.J.L.  
DM101.00  
05 OF 05






**GAMBINO + LAPORTA**  
**ARCHITECTURE, DPC**  
 129 R. RICHMOND ROAD, STATEN ISLAND, NY 10314  
 PHONE: 718.667.6621 FAX: 718.667.1196 EMAIL: STUDIO@GL-ARCH.COM  
 WWW.G.L.A.R.C.H.C.O.M

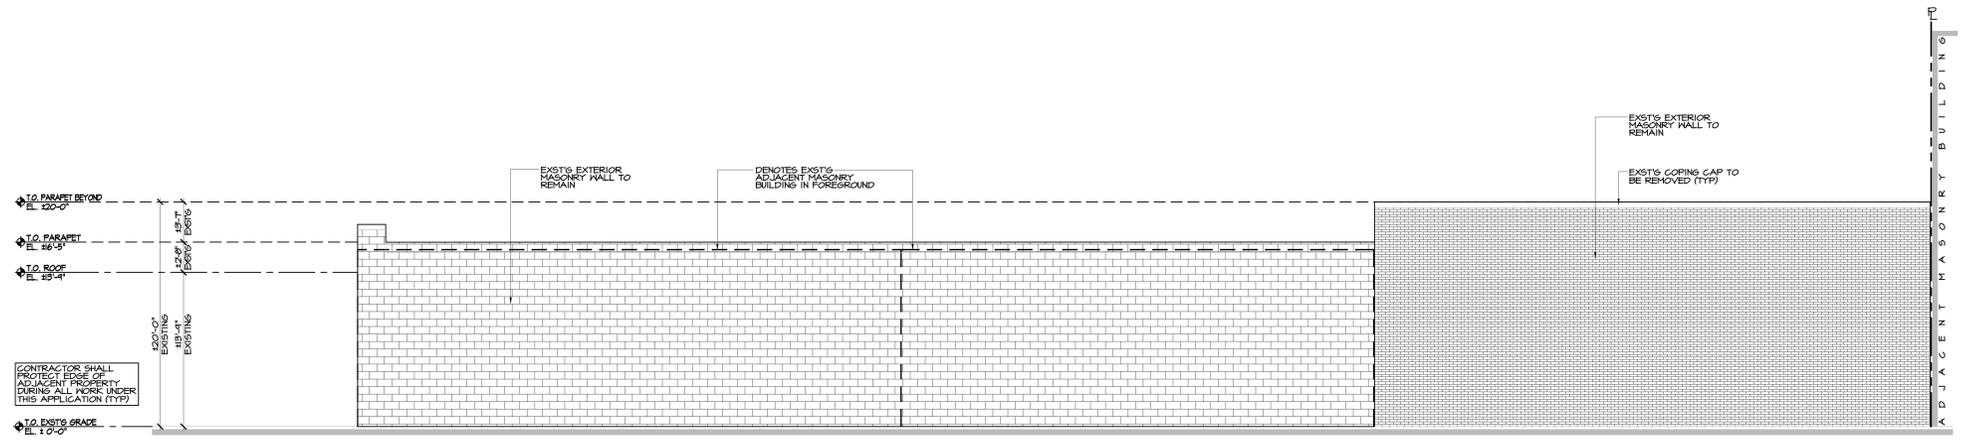

② EXST'G NORTH ELEVATION  
 3/16" = 1'-0"

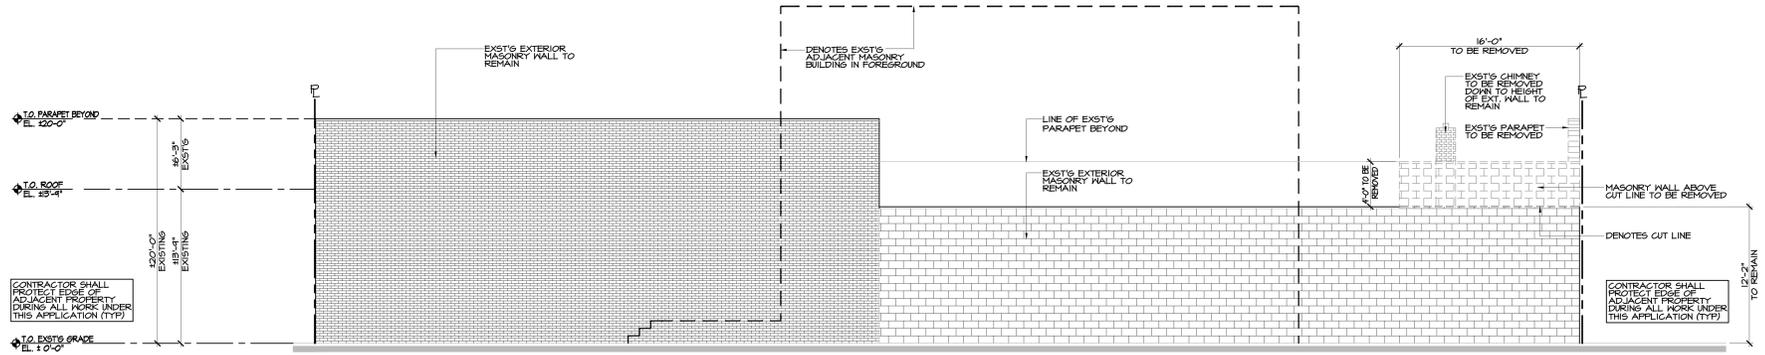

① EXST'G WEST ELEVATION  
 3/16" = 1'-0"


NO.	DATE	DESCRIPTION
1	2/20/24	ISSUED FOR RESOLUTION PERMIT

9029 FLATLANDS AVENUE  
 BLOCK NO. 819  
 LOT NO. 1  
 BROOKLYN, NY 11226  
 BIN NO. 322941

POLIZZOTTO REALTY  
 6411 18TH AVENUE  
 BROOKLYN, NY 11204

EXIST'G NORTH ELEVATION &  
 EXST'G WEST ELEVATION  
 SCALE: AS NOTED  
 SEAL AND SIGNATURE

STEVEN GAMBINO #1  
 PROJECT NO. GLA14-0210  
 SHEET NO. DM103.00  
 OF 05

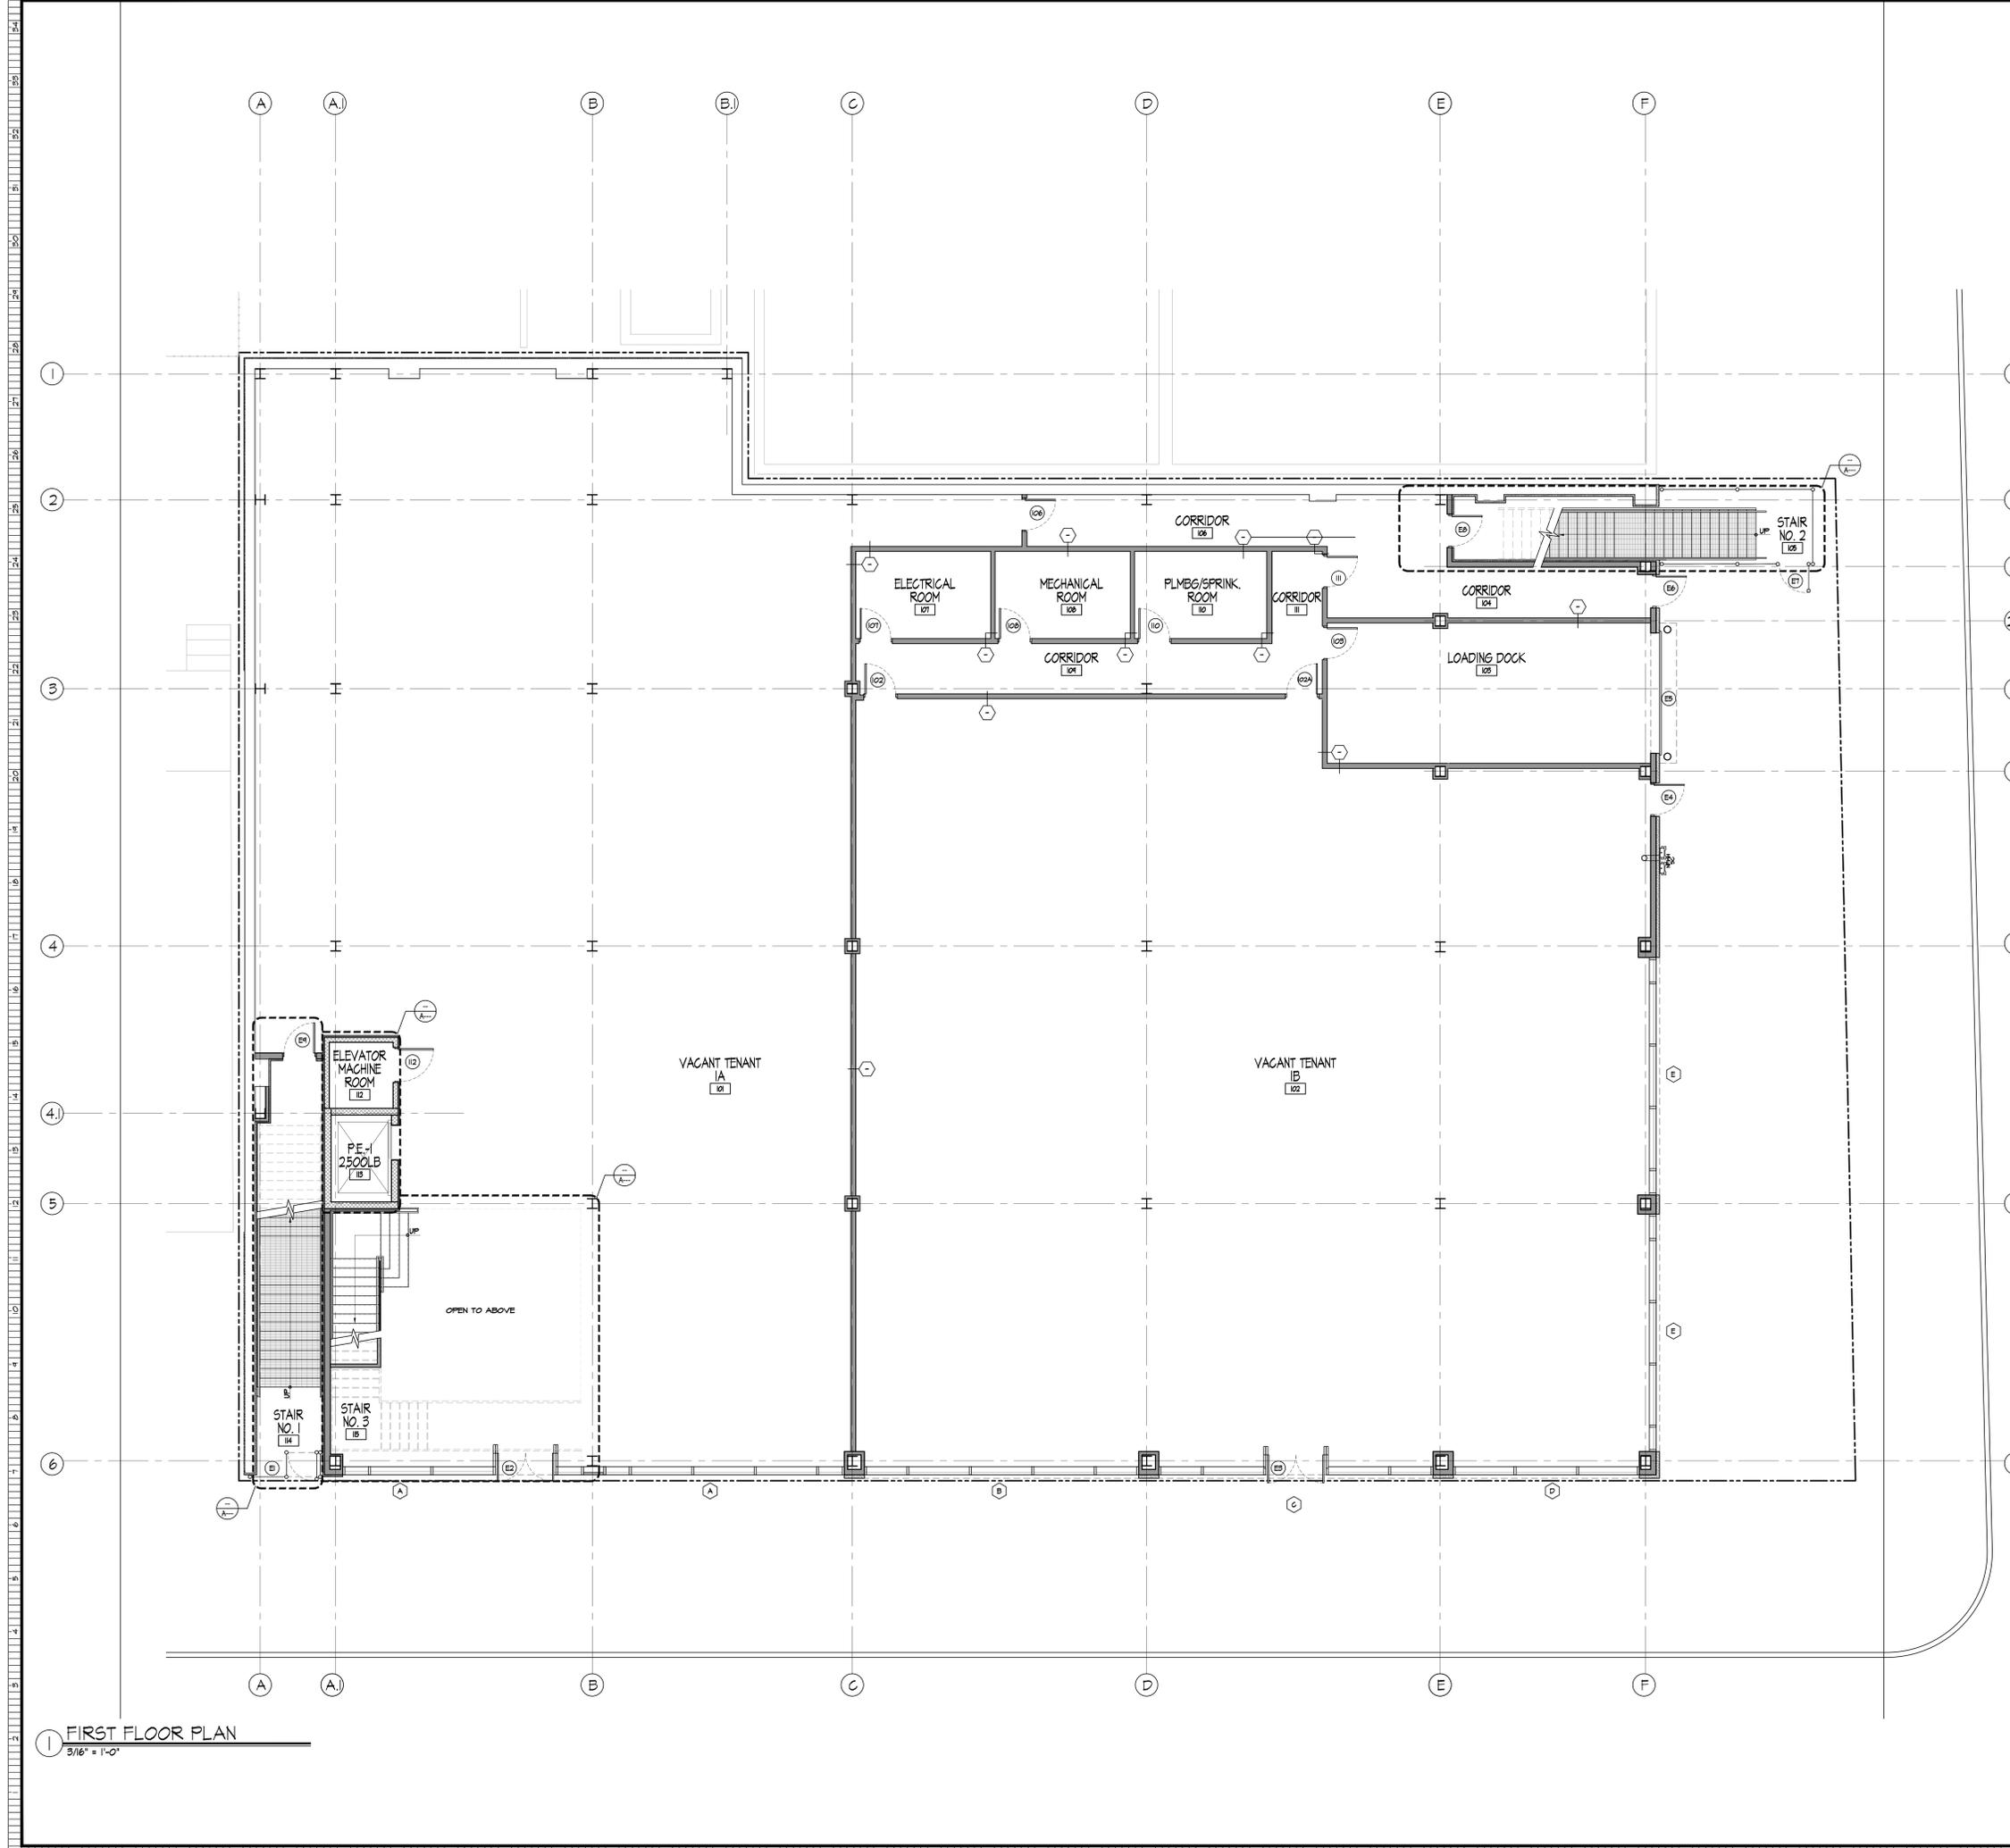

**PARTITION LEGEND**


PARTITION	RATING
① 8" CONC. BLOCK CLASSIFICATION D-2. FILL VOIDS AT DECKING w/FIRE SAFING INSUL. PART. HT. TO UNDERSIDE OF FLOOR/ROOF STRUCTURE ABOVE	2 HR DESIGN #U406
NOTE: SEE STRUCT. DWGS FOR REINFORCEMENT DETAILS	
①A SAME AS PARTITION TYPE 1	UL DESIGN #U406
② 6" CONC. BLOCK CLASSIFICATION D-2. FILL VOIDS AT DECKING w/FIRE SAFING INSUL. PART. HT. TO UNDERSIDE OF FLOOR/ROOF STRUCTURE ABOVE	2 HR DESIGN #U419
③ 3-5/8" 20 GA METAL STUDS @ 16" O.C. w/ [2] LAYERS 5/8" 6YTP. BD. @ BOTH FACES w/3" MINERAL WOOL BATT PART. HT. TO UNDERSIDE OF FLOOR STRUCTURE ABOVE	2 HR DESIGN #U430
④ 2-1/2" X 1-1/2" 20 GA C-H STUDS @ 16" O.C. w/ 1" 6YTP. BD. LINER PANELS AND [2] LAYERS OF 1/2" 6YTP. BD. PART. HT. TO UNDERSIDE OF FLOOR/ROOF STRUCTURE ABOVE	2 HR DESIGN #U419
⑤ 3-5/8" 20 GA METAL STUDS @ 16" O.C. w/5/8" 6YTP. BD. @ BOTH FACES w/3" BATT INSULATION PART. HT. TO UNDERSIDE OF FLOOR STRUCTURE ABOVE	2 HR DESIGN #U406
⑥ 1-5/8" 20 GA METAL STUDS @ 16" O.C. w/5/8" 6YTP. BD. HELD TIGHT TO 8" CONC. BLOCK CLASSIFICATION D-2. FILL VOIDS AT DECKING w/FIRE SAFING INSUL. PART. HT. TO UNDERSIDE OF FLOOR/ROOF STRUCTURE ABOVE	2 HR DESIGN #U406
NOTE: SEE STRUCT. DWGS FOR REINFORCEMENT DETAILS	
<b>GENERAL PARTITION NOTES:</b>	
1. SEE UL DESIGN ASSEMBLIES FOR DETAILED PARTITION INFORMATION	
2. SIZE & GAUGE OF STUDS LISTED SHALL BE AS DETERMINED BY MANUFACTURER'S HEIGHT LIMITATIONS FOR NON-BEARING INTERIOR WALLS AND 5 PSF WIND LOAD.	
3. PROVIDE WATER RESISTANT GYPSUM BOARD AT ALL NET AREAS.	

**1 FIRST FLOOR PLAN**  
3/16" = 1'-0"



**GAMBINO + LAPORTA**  
ARCHITECTURE, DPC  
129 R. RICHMOND ROAD, STATEN ISLAND, NY 10314  
PHONE: 718.667.6692 FAX: 718.667.1196 EMAIL: STUDIO@GLARCH.COM

<p>DESCRIPTION</p> <p>REV. NO. DATE</p>	<p>PROJECT NO. 0229</p> <p>BLOCK NO. 4041</p> <p>LOT NO. 1256</p> <p>BRONX, NY 10466</p> <p>CLIENT: POLIZZOTTO REALTY</p> <p>6411 18TH AVENUE</p> <p>BROOKLYN, NY 11204</p>
<p>FIRST FLOOR PLAN</p> <p>SCALE: AS NOTED</p> <p>DATE AND SIGNATURE</p>	
<p>PROJECT NO. 0229</p> <p>PROJECT NAME: GLA14-0270</p> <p>DATE: 10/01/14</p> <p>SCALE: 1/100.00</p> <p>PROJECT NO. 0229</p>	
<p>PROGRESS PRINT</p> <p>1000T14</p> <p>COORDINATION</p>	

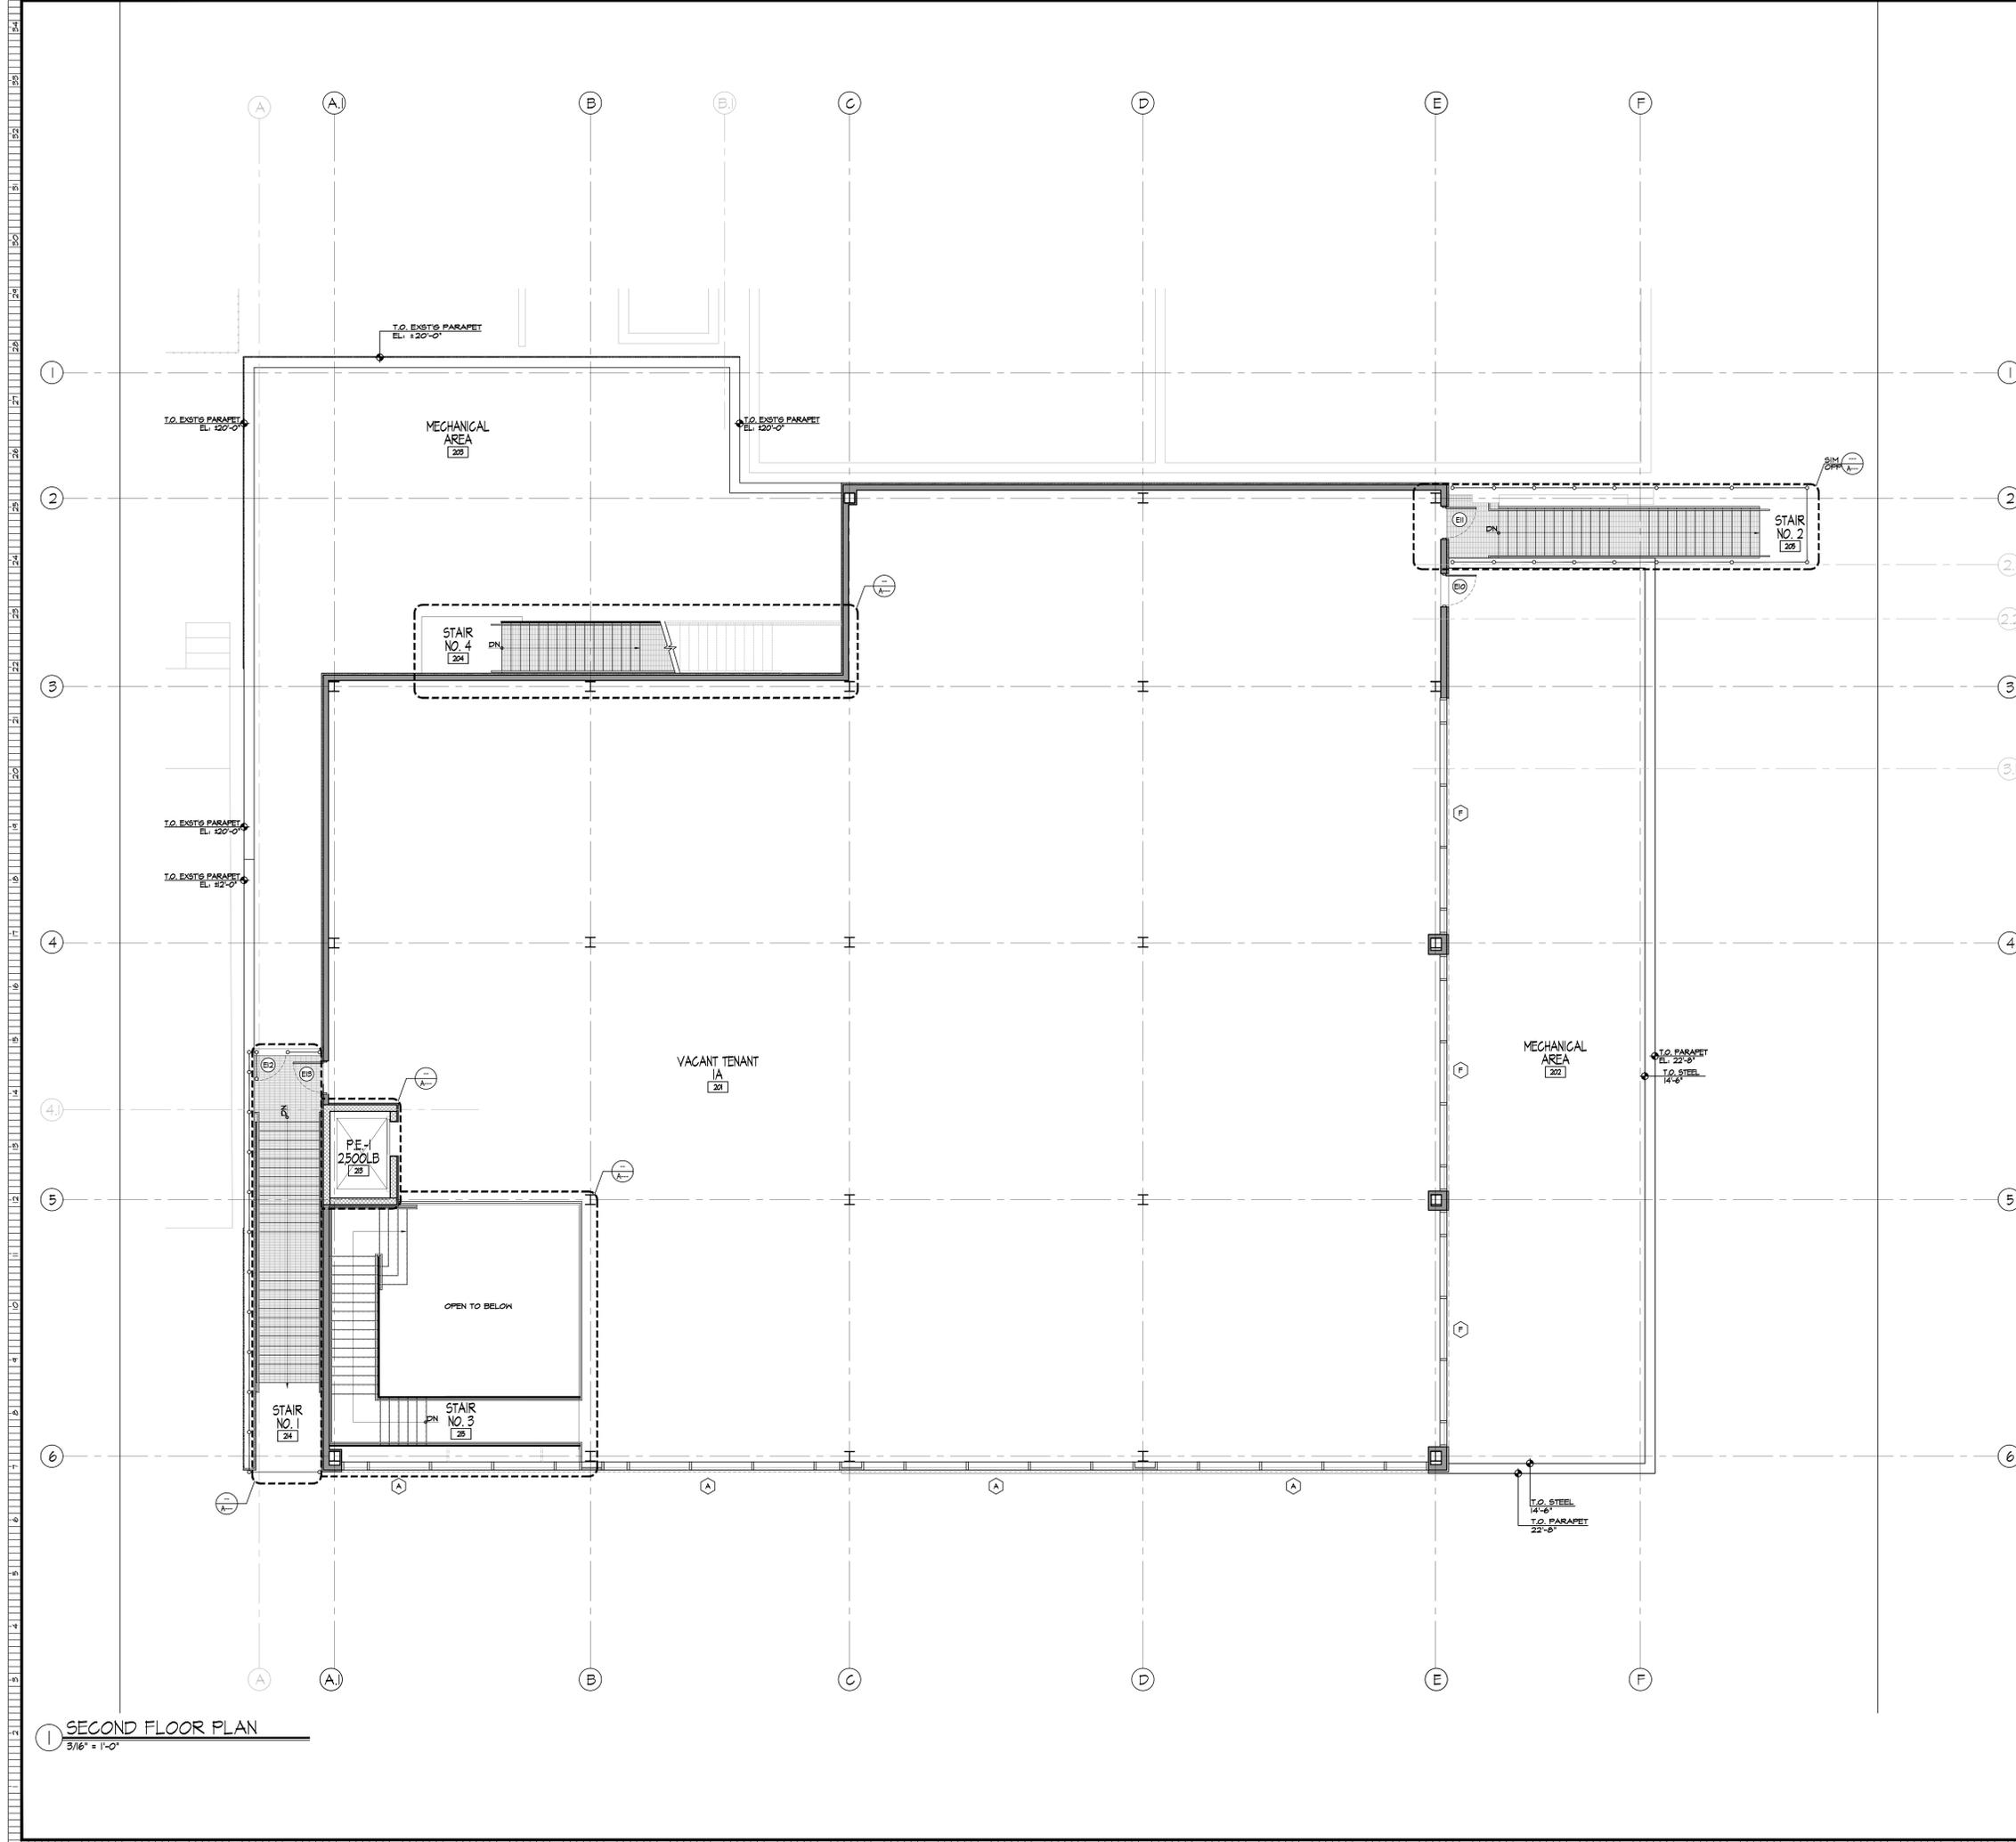

**PARTITION LEGEND**

PARTITION	RATING
1. 8" CONC. BLOCK CLASSIFICATION D-2. FILL VOIDS AT DECKING w/FIRE SAFING INSUL. PART. HT. TO UNDERSIDE OF FLOOR/ROOF STRUCTURE ABOVE.	2 HR UL DESIGN #R406
NOTE: SEE STRUCT. DWGS FOR REINFORCEMENT DETAILS.	
1A. SAME AS PARTITION TYPE 1.	1 HR UL DESIGN #R406
2. 6" CONC. BLOCK CLASSIFICATION D-2. FILL VOIDS AT DECKING w/FIRE SAFING INSUL. PART. HT. TO UNDERSIDE OF FLOOR/ROOF STRUCTURE ABOVE.	1 HR UL DESIGN #R406
3. 3-5/8" 20 GA METAL STUDS @ 16" O.C. w/ [2] LAYERS 5/8" 6YTP. BD. @ BOTH FACES w/3" MINERAL WOOL BATT. PART. HT. TO UNDERSIDE OF FLOOR STRUCTURE ABOVE.	2 HR UL DESIGN #U419
4. 2-1/2" X 1-1/2" 20 GA C-H STUDS @ 16" O.C. w/ 1" 6YTP. BD. LINER PANELS AND [2] LAYERS OF 1/2" 6YTP. BD. PART. HT. TO UNDERSIDE OF FLOOR/ROOF STRUCTURE ABOVE.	2 HR UL DESIGN #U430
5. 3-5/8" 20 GA METAL STUDS @ 16" O.C. w/5/8" 6YTP. BD. @ BOTH FACES w/3" BATT INSULATION. PART. HT. TO UNDERSIDE OF FLOOR STRUCTURE ABOVE.	1 HR UL DESIGN #U419
6. 1-5/8" 20 GA METAL STUDS @ 16" O.C. w/5/8" 6YTP. BD. HELD TIGHT TO 8" CONC. BLOCK CLASSIFICATION D-2. FILL VOIDS AT DECKING w/FIRE SAFING INSUL. PART. HT. TO UNDERSIDE OF FLOOR/ROOF STRUCTURE ABOVE.	2 HR UL DESIGN #R406
NOTE: SEE STRUCT. DWGS FOR REINFORCEMENT DETAILS.	

- GENERAL PARTITION NOTES:**
- SEE UL DESIGN ASSEMBLIES FOR DETAILED PARTITION INFORMATION.
  - SIZE & GAUGE OF STUDS LISTED SHALL BE AS DETERMINED BY MANUFACTURER'S HEIGHT LIMITATIONS FOR NON-BEARING INTERIOR WALLS AND 5 PSF WIND LOAD.
  - PROVIDE WATER RESISTANT GYPSUM BOARD AT ALL NET AREAS.




**GAMBINO + LAPORTA ARCHITECTURE, DPC**  
 129 R. RICHMOND ROAD, STATEN ISLAND, N.Y. 10314  
 PHONE: 718.667.6692 FAX: 718.667.1196 EMAIL: STUDIO@GLARCH.COM  
 WWW.G.L.A.R.C.H.

<p>9029 FLATLANDS AVENUE          BLOCK NO. 819          LOT NO. 10          BROOKLYN, NY 11226          BIN NO. 322941</p>	<p>POLIZOTTO REALTY          6411 18TH AVENUE          BROOKLYN, NY 11204</p>
<p>DATE: _____</p> <p>REVISION: _____</p>	
<p><b>SECOND FLOOR PLAN</b></p> <p>SCALE: AS NOTED</p> <p>DATE AND SIGNATURE: _____</p>	
<p>PROJECT NO. GLA14-0210</p> <p>DESIGNED BY: ML</p> <p>CHECKED BY: T.J.L.</p> <p>DRAWN BY: _____</p>	
<p>100014</p> <p>COORDINATION</p>	

**1 SECOND FLOOR PLAN**  
 3/16" = 1'-0"



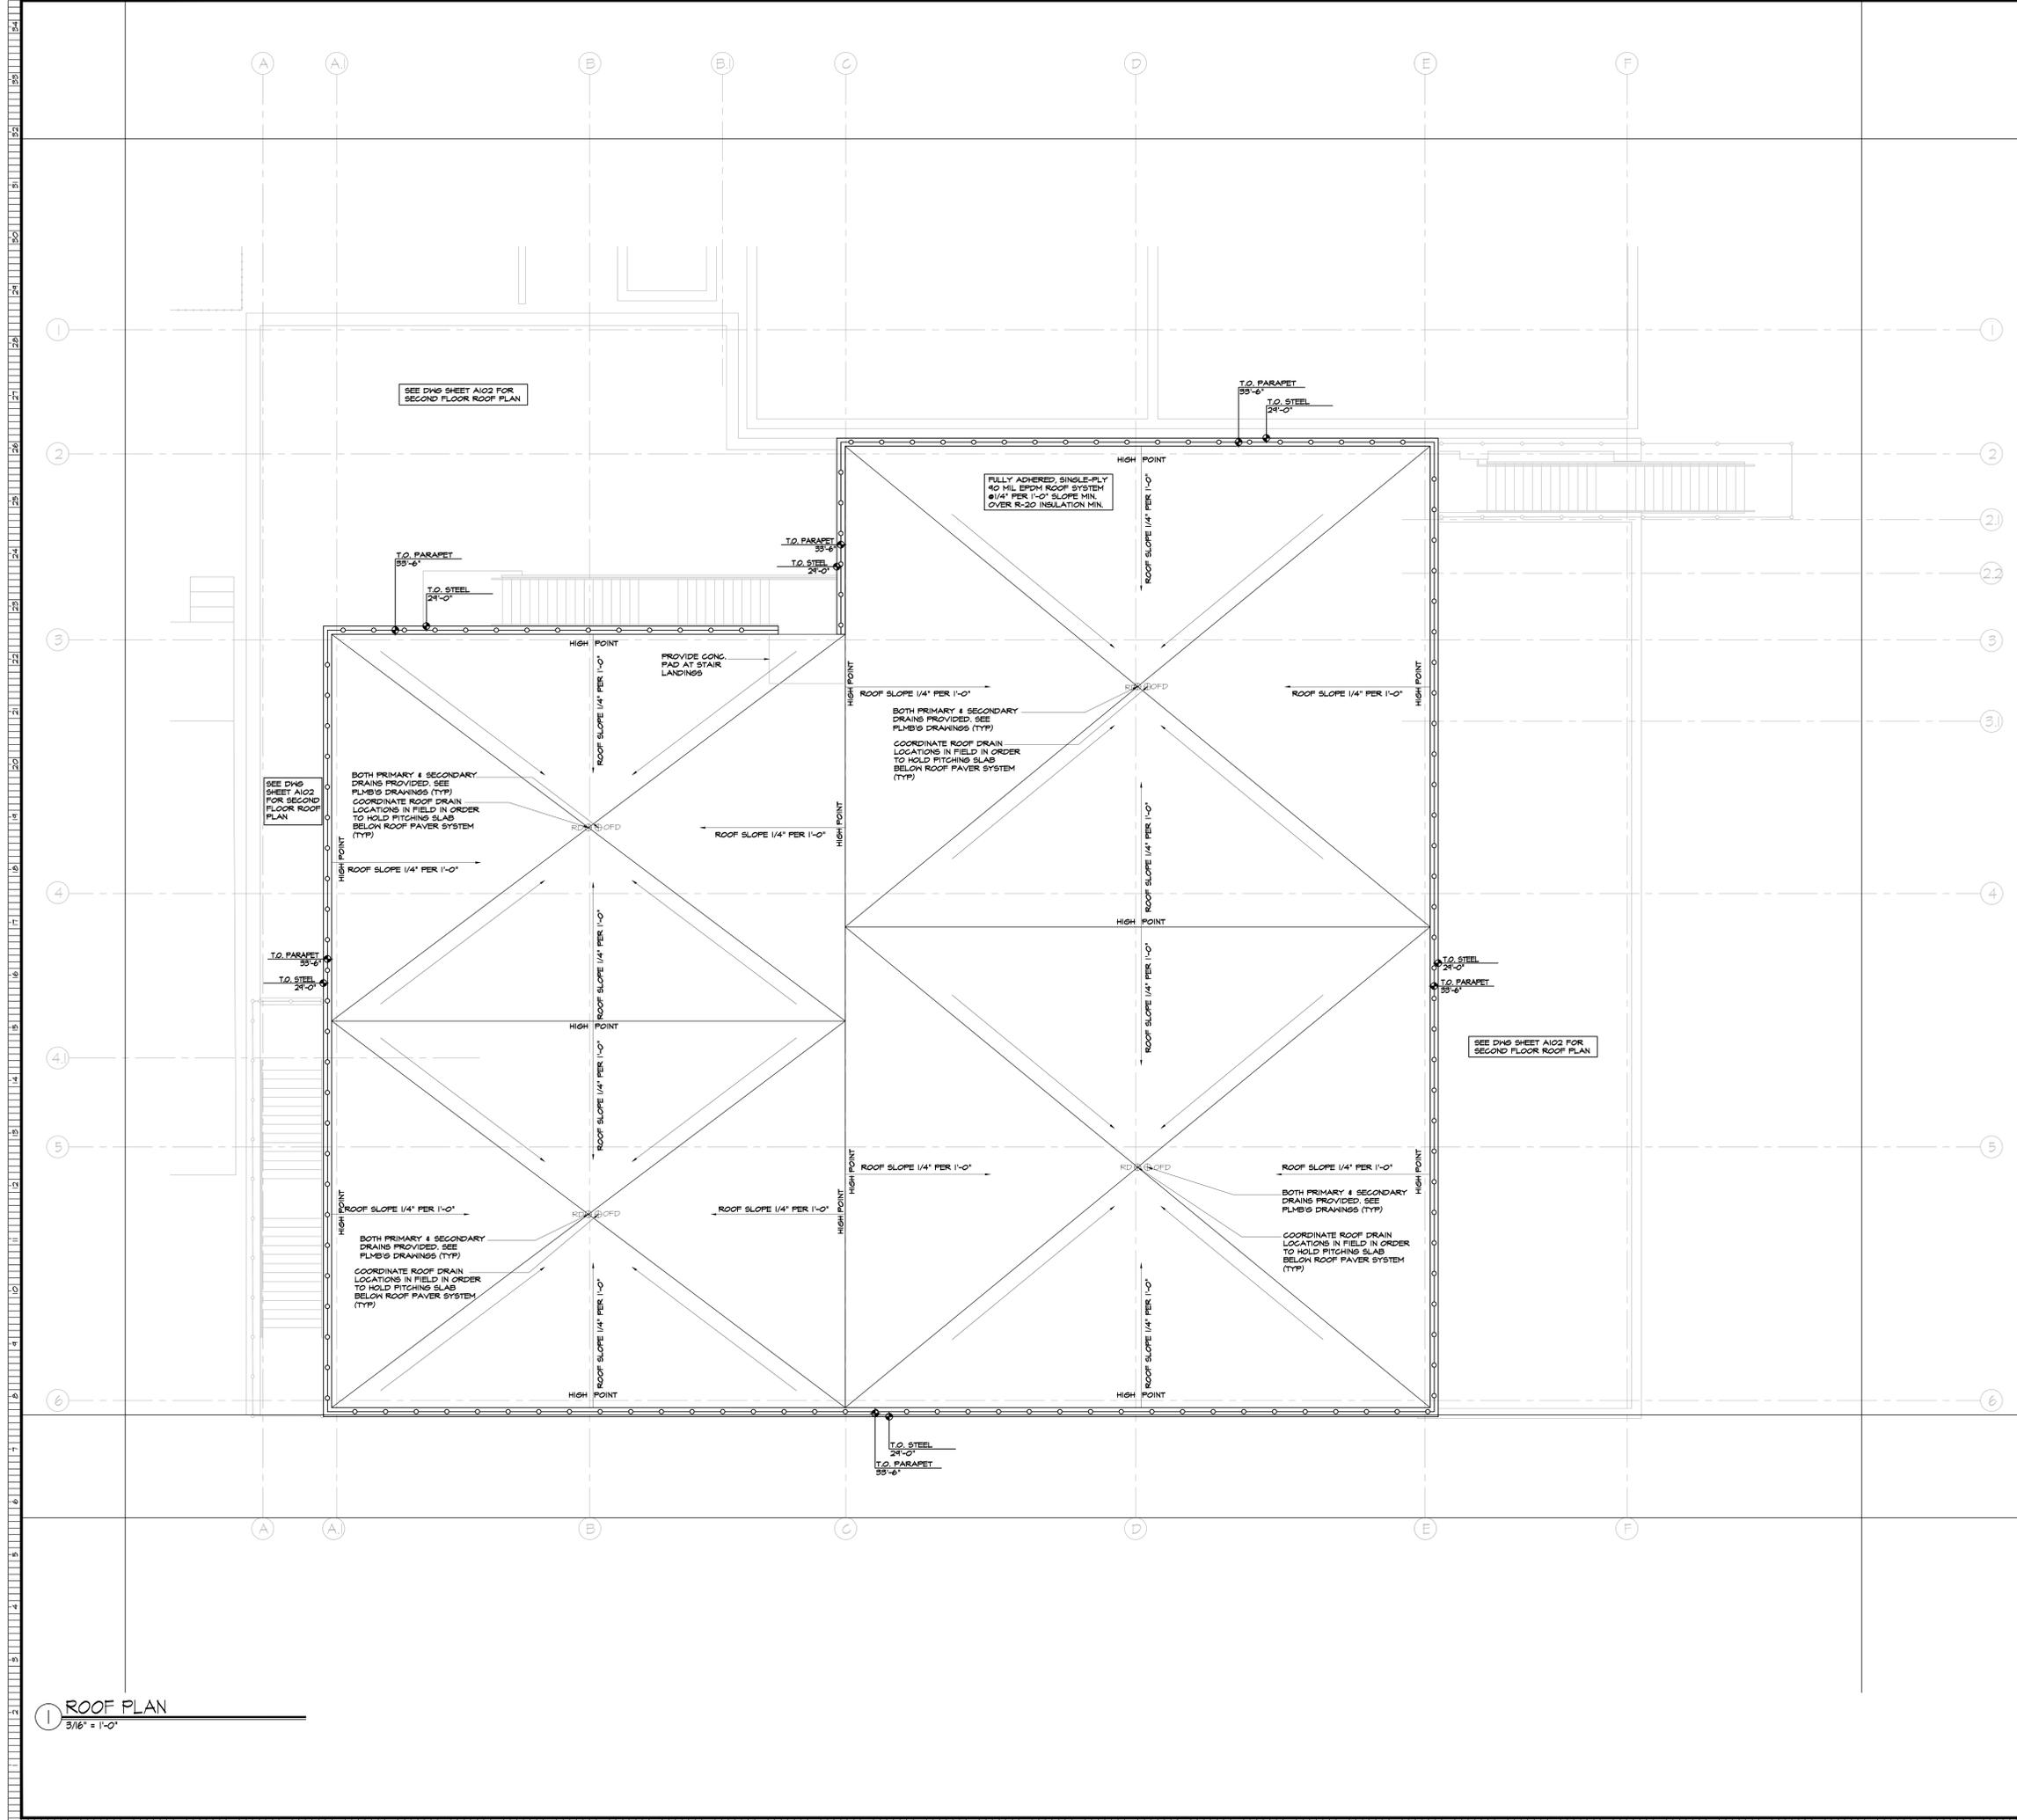

SEE DWG SHEET A102 FOR SECOND FLOOR ROOF PLAN

FULLY ADHERED, SINGLE-PLY 40 MIL EPDM ROOF SYSTEM @ 1/4" PER 1'-0" SLOPE MIN. OVER R-20 INSULATION MIN.

SEE DWG SHEET A102 FOR SECOND FLOOR ROOF PLAN

BOTH PRIMARY & SECONDARY DRAINS PROVIDED. SEE PLUMBING DRAWINGS (TYP).  
COORDINATE ROOF DRAIN LOCATIONS IN FIELD IN ORDER TO HOLD FITTING SLAB BELOW ROOF PAVEMENT SYSTEM (TYP).

BOTH PRIMARY & SECONDARY DRAINS PROVIDED. SEE PLUMBING DRAWINGS (TYP).  
COORDINATE ROOF DRAIN LOCATIONS IN FIELD IN ORDER TO HOLD FITTING SLAB BELOW ROOF PAVEMENT SYSTEM (TYP).

BOTH PRIMARY & SECONDARY DRAINS PROVIDED. SEE PLUMBING DRAWINGS (TYP).  
COORDINATE ROOF DRAIN LOCATIONS IN FIELD IN ORDER TO HOLD FITTING SLAB BELOW ROOF PAVEMENT SYSTEM (TYP).

BOTH PRIMARY & SECONDARY DRAINS PROVIDED. SEE PLUMBING DRAWINGS (TYP).  
COORDINATE ROOF DRAIN LOCATIONS IN FIELD IN ORDER TO HOLD FITTING SLAB BELOW ROOF PAVEMENT SYSTEM (TYP).

SEE DWG SHEET A102 FOR SECOND FLOOR ROOF PLAN

1 ROOF PLAN  
3/16" = 1'-0"

NO.	REVISION	DATE

PROJECT: 9029 FLATLANDS AVENUE  
 BLOCK NO. 8198  
 LOT NO. 1  
 BIN NO. 3229481  
 BROOKLYN, NY 11236  
 POLIZZOTTO REALTY  
 6411 18TH AVENUE  
 BROOKLYN, NY 11204

ROOF PLAN  
 SCALE: AS NOTED  
 SEAL AND SIGNATURE

PROJECT NO. GLA14-0210  
 DRAWN BY: ML  
 CHECKED BY: T.J.L.  
 DATE: 10/01/14  
 SHEET NO. A103.00  
 OF 01  
 PROGRESS PRINT  
 1000T14  
 COORDINATION







## **APPENDIX 6**

# **VAPOR BARRIER AND SUB-SLAB DEPRESSURIZATION SYSTEM SPECIFICATIONS**

## PREPRUFE® 300R & 160R

Pre-applied waterproofing membranes that bond integrally to poured concrete for use below slabs or behind basement walls on confined sites

### Description

Preprufe® 300R & 160R membranes are unique composite sheets comprising a thick HDPE film, an aggressive pressure sensitive adhesive and a weather resistant protective coating.

Unlike conventional non-adhering membranes, which are vulnerable to water ingress tracking between the unbonded membrane and structure, the unique Preprufe bond to concrete prevents ingress or migration of water around the structure.

The Preprufe R System includes:


- **Preprufe 300R**—heavy-duty grade for use below slabs and on rafts (i.e. mud slabs). Designed to accept the placing of heavy reinforcement using conventional concrete spacers.
- **Preprufe 160R**—thinner grade for blindside, zero property line applications against soil retention systems.
- **Preprufe Tape LT**—for covering cut edges, roll ends, penetrations and detailing (temperatures between 25°F (-4°C) and 86°F (+30°C)).
- **Preprufe Tape HC**—as above for use in Hot Climates (minimum 50°F (10°C)).
- **Bituthene® Liquid Membrane**—for sealing around penetrations, etc.
- **Adcor™ ES**—waterstop for joints in concrete walls and floors
- **Preprufe Tieback Covers**—preformed cover for soil retention wall tieback heads
- **Preprufe Preformed Corners**—preformed inside and outside corners

Preprufe 300R & 160R membranes are applied either horizontally to smooth prepared concrete, carton forms or well rolled and compacted earth or crushed stone substrate; or vertically to permanent formwork or adjoining structures. Concrete is then cast directly against the adhesive side of the membranes. The specially developed Preprufe adhesive layers work together to form a continuous and integral seal to the structure.

Preprufe can be returned up the inside face of slab formwork but is not recommended for conventional twin-sided formwork on walls, etc. Use Bituthene self-adhesive membrane or Procor® fluid applied membrane to walls after removal of formwork for a fully bonded system to all structural surfaces.

### Advantages

- **Forms a unique continuous adhesive bond to concrete poured against it**—prevents water migration and makes it unaffected by ground settlement beneath slabs
- **Fully-adhered watertight laps** and detailing
- **Provides a barrier to water, moisture and gas**—physically isolates the structure from the surrounding ground
- **BBA Certified** for basement Grades 2, 3, & 4 to BS 8102:1990
- **Zero permeance** to moisture
- **Solar reflective**—reduced temperature gain
- **Simple and quick to install**—requiring no priming or fillets
- **Can be applied to permanent formwork**—allows maximum use of confined sites
- **Self protecting**—can be trafficked immediately after application and ready for immediate placing of reinforcement
- **Unaffected by wet conditions**—cannot activate prematurely
- **Inherently waterproof, non-reactive system:**
  - not reliant on confining pressures or hydration
  - unaffected by freeze/thaw, wet/dry cycling
- **Chemical resistant**—effective in most types of soils and waters, protects structure from salt or sulphate attack

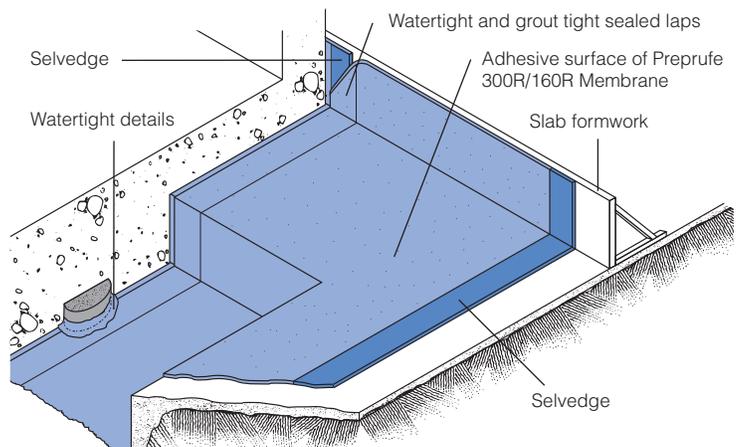

Drawings are for illustration purposes only. Please refer to [graceconstruction.com](http://graceconstruction.com) for specific application details.

## Installation

The most current application instructions, detail drawings and technical letters can be viewed at [graceconstruction.com](http://graceconstruction.com). For other technical information contact your local Grace representative.

Preprufe 300R & 160R membranes are supplied in rolls 4 ft (1.2 m) wide, with a selvedge on one side to provide self-adhered laps for continuity between rolls. The rolls of Preprufe Membrane and Preprufe Tape are interwound with a disposable plastic release liner which must be removed before placing reinforcement and concrete.

### Substrate Preparation

**All surfaces**—It is essential to create a sound and solid substrate to eliminate movement during the concrete pour. Substrates must be regular and smooth with no gaps or voids greater than 0.5 in. (12 mm). Grout around all penetrations such as utility conduits, etc. for stability (see Figure 1).

**Horizontal**—The substrate must be free of loose aggregate and sharp protrusions. Avoid curved or rounded substrates. When installing over earth or crushed stone, ensure substrate is well compacted to avoid displacement of substrate due to traffic or concrete pour. The surface does not need to be dry, but standing water must be removed.

**Vertical**—Use concrete, plywood, insulation or other approved facing to sheet piling to provide support to the membrane. Board systems such as timber lagging must be close butted to provide support and not more than 0.5 in. (12 mm) out of alignment.

### Membrane Installation

Preprufe can be applied at temperatures of 25°F (-4°C) or above. When installing Preprufe in cold or marginal weather conditions 55°F (<13°C) the use of Preprufe Tape LT is recommended at all laps and detailing. Preprufe Tape LT should be applied to clean, dry surfaces and the release liner must be removed immediately after application. Alternatively, Preprufe Low Temperature (LT) is available for low temperature condition applications. Refer to Preprufe LT data sheet for more information.

**Horizontal substrates**—Place the membrane HDPE film side to the substrate with the clear plastic release liner facing towards the concrete pour. End laps should be staggered to avoid a build up of layers. Leave plastic release liner in position until overlap procedure is completed (see Figure 2).

Accurately position succeeding sheets to overlap the previous sheet 3 in. (75 mm) along the marked selvedge. Ensure the underside of the succeeding sheet is clean, dry and free from contamination before attempting to overlap. Peel back the plastic release liner from between the overlaps as the two layers are bonded together. Ensure a continuous bond is achieved without creases and roll firmly with a heavy roller. Completely remove the plastic liner to expose the protective coating. Any initial tack will quickly disappear.

Refer to Grace Tech Letter 15 for information on suitable rebar chairs for Preprufe.

**Vertical substrates**—Mechanically fasten the membrane vertically using fasteners appropriate to the substrate with the clear plastic release liner facing towards the concrete pour. The membrane may be installed in any convenient length. Fastening can be made through the selvedge using a small and low profile head fastener so that the membrane lays flat and allows firmly rolled overlaps. Immediately remove the plastic release liner.

Ensure the underside of the succeeding sheet is clean, dry and free from contamination before attempting to

overlap. Roll firmly to ensure a watertight seal.

**Roll ends and cut edges**—Overlap all roll ends and cut edges by a minimum 3 in. (75 mm) and ensure the area is clean and free from contamination, wiping with a damp cloth if necessary. Allow to dry and apply Preprufe Tape LT (or HC in hot climates) centered over the lap edges and roll firmly (see Figure 3). Immediately remove printed plastic release liner from the tape.

### Details

Refer to Preprufe Field Application Manual, Section V Application Instructions or visit [graceconstruction.com](http://graceconstruction.com). This manual gives comprehensive guidance and standard details.

### Membrane Repair

Inspect the membrane before installation of reinforcement steel, formwork and final placement of concrete. The membrane can be easily cleaned by power washing if required. Repair damage by wiping the area with a damp cloth to ensure the area is clean and free from dust, and allow to dry. Repair small punctures (0.5 in. (12 mm) or less) and slices by applying Preprufe Tape centered over the damaged area and roll firmly. Remove the release liner from the tape. Repair holes and large punctures by applying a patch of Preprufe membrane, which extends 6 in. (150 mm) beyond the damaged area. Seal all edges of the patch with Preprufe Tape, remove the release liner from the tape and roll firmly. Any areas of damaged adhesive should be covered with Preprufe Tape. Remove printed plastic release liner from tape. Where exposed selvedge has lost adhesion or laps have not been sealed, ensure the area is clean and dry and cover with fresh Preprufe Tape, rolling firmly. Alternatively, use a hot air gun or similar to activate adhesive and firmly roll lap to achieve continuity.

### Pouring of Concrete

Ensure the plastic release liner is removed from all areas of Preprufe membrane and tape.

It is recommended that concrete be poured within 56 days (42 days in hot climates) of application of the membrane. Following proper ACI guidelines, concrete must be placed carefully and consolidated properly to avoid damage to the membrane. Never use a sharp object to consolidate the concrete.

### Removal of Formwork

Preprufe membranes can be applied to removable formwork, such as slab perimeters, elevator and lift pits, etc. Once the concrete is poured the formwork must remain in place until the concrete has gained sufficient compressive strength to develop the surface bond. Preprufe membranes are not recommended for conventional twin-sided wall forming systems.

A minimum concrete compressive strength of 1500 psi (10 N/mm<sup>2</sup>) is recommended prior to stripping formwork supporting Preprufe membranes. Premature stripping may result in displacement of the membrane and/or spalling of the concrete.

Refer to Grace Tech Letter 17 for information on removal of formwork for Preprufe.

Figure 1




Figure 2







Figure 3

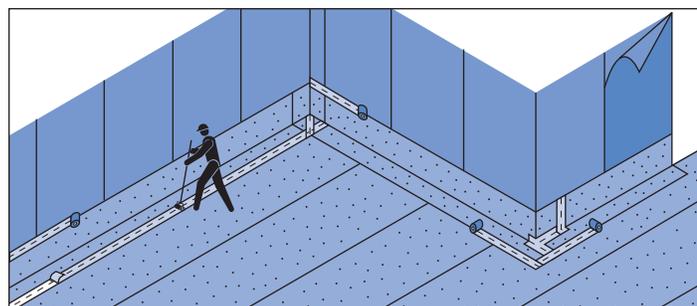


## Detail Drawings

Details shown are typical illustrations and not working details. For a list of the most current details, visit us at [graceconstruction.com](http://graceconstruction.com). For technical assistance with detailing and problem solving please call toll free at 866-333-3SBM (3726).


### Wall base detail against permanent shutter

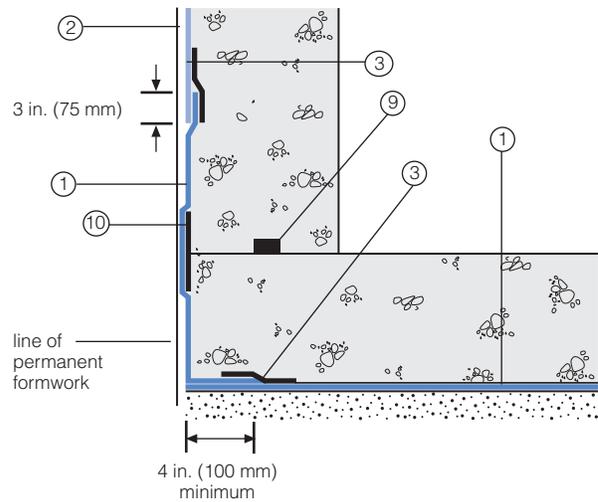


### Bituthene wall base detail (Option 1)

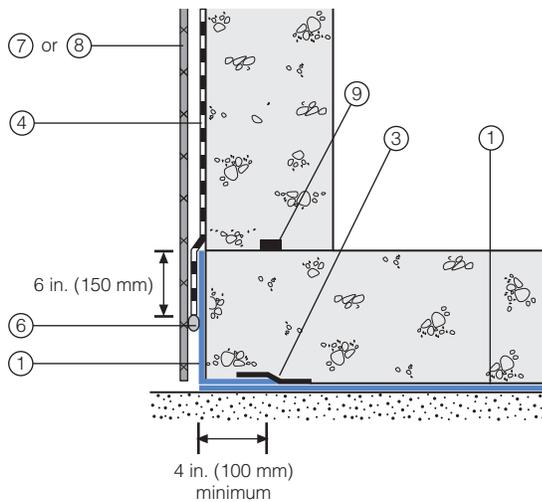


### Procor wall base detail (Option 1)

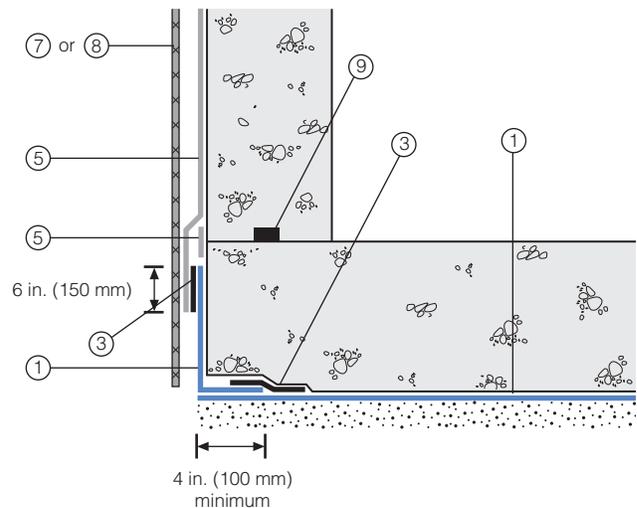

### Bituthene wall base detail (Option 2)

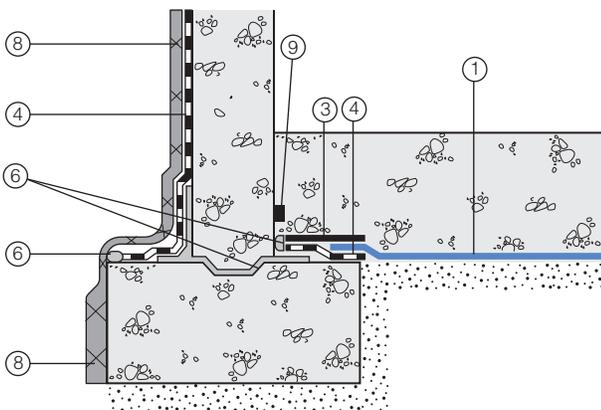

### Procor wall base detail (Option 2)

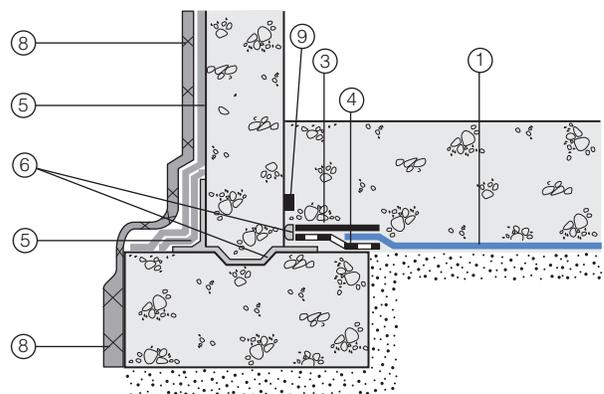

- 1 Preprufe 300R
- 2 Preprufe 160R
- 3 Preprufe Tape
- 4 Bituthene

- 5 Procor
- 6 Bituthene Liquid Membrane
- 7 Protection

- 8 Hydroduct®
- 9 Adcor ES
- 10 Preprufe CJ Tape

## Supply

Dimensions (Nominal)	Preprufe 300R Membrane	Preprufe 160R Membrane	Preprufe Tape (LT or HC*)
Thickness	0.046 in. (1.2 mm)	0.032 in. (0.8 mm)	
Roll size	4 ft x 98 ft (1.2 m x 30 m)	4 ft x 115 ft (1.2 m x 35 m)	4 in. x 49 ft (100 mm x 15 m)
Roll area	392 ft <sup>2</sup> (36 m <sup>2</sup> )	460 ft <sup>2</sup> (42 m <sup>2</sup> )	
Roll weight	108 lbs (50 kg)	92 lbs (42 kg)	4.3 lbs (2 kg)
Minimum side/end laps	3 in. (75 mm)	3 in. (75 mm)	3 in. (75 mm)
* LT denotes Low Temperature (between 25°F (-4°C) and 86°F (+30°C)) HC denotes Hot Climate (50°F (>+10°C))			
<b>Ancillary Products</b>			
Bituthene Liquid Membrane—1.5 US gal (5.7 liter) or 4 US gal (15.1 liter)			

## Physical Properties

Property	Typical Value 300R	Typical Value 160R	Test Method
Color	white	white	
Thickness	0.046 in. (1.2 mm)	0.032 in. (0.8 mm)	ASTM D3767
Lateral Water Migration Resistance	Pass at 231 ft (71 m) of hydrostatic head pressure	Pass at 231 ft (71 m) of hydrostatic head pressure	ASTM D5385, modified <sup>1</sup>
Low temperature flexibility	Unaffected at -20°F (-29°C)	Unaffected at -20°F (-29°C)	ASTM D1970
Resistance to hydrostatic head	231 ft (71 m)	231 ft (71 m)	ASTM D5385, modified <sup>2</sup>
Elongation	500%	500%	ASTM D412, modified <sup>3</sup>
Tensile strength, film	4000 psi (27.6 MPa)	4000 psi (27.6 MPa)	ASTM D412
Crack cycling at -9.4°F (-23°C), 100 cycles	Unaffected, Pass	Unaffected, Pass	ASTM C836
Puncture resistance	221 lbs (990 N)	100 lbs (445 N)	ASTM E154
Peel adhesion to concrete	5 lbs/in. (880 N/m)	5 lbs/in. (880 N/m)	ASTM D903, modified <sup>4</sup>
Lap peel adhesion	5 lbs/in. (880 N/m)	5 lbs/in. (880 N/m)	ASTM D1876, modified <sup>5</sup>
Permeance to water vapor transmission	0.01 perms (0.6 ng/(Pa × s × m <sup>2</sup> ))	0.01 perms (0.6 ng/(Pa × s × m <sup>2</sup> ))	ASTM E96, method B
Water absorption	0.5%	0.5%	ASTM D570

### Footnotes:

- Lateral water migration resistance is tested by casting concrete against membrane with a hole and subjecting the membrane to hydrostatic head pressure with water. The test measures the resistance of lateral water migration between the concrete and the membrane.
- Hydrostatic head tests of Preprufe Membranes are performed by casting concrete against the membrane with a lap. Before the concrete cures, a 0.125 in. (3 mm) spacer is inserted perpendicular to the membrane to create a gap. The cured block is placed in a chamber where water is introduced to the membrane surface up to the head indicated.
- Elongation of membrane is run at a rate of 2 in. (50 mm) per minute.
- Concrete is cast against the protective coating surface of the membrane and allowed to properly dry (7 days minimum). Peel adhesion of membrane to concrete is measured at a rate of 2 in. (50 mm) per minute at room temperature.
- The test is conducted 15 minutes after the lap is formed (per Grace published recommendations) and run at a rate of 2 in. (50 mm) per minute.

### Specification Clauses

Preprufe 300R or 160R shall be applied with its adhesive face presented to receive fresh concrete to which it will integrally bond. Only Grace Construction Products approved membranes shall be bonded to Preprufe 300R/160R. All Preprufe 300R/160R system materials shall be supplied by Grace Construction Products, and applied strictly in accordance with their instructions. Specimen performance and formatted clauses are also available.

NOTE: Use Preprufe Tape to tie-in Procor with Preprufe.

### Health and Safety

Refer to relevant Material Safety data sheet. Complete rolls should be handled by a minimum of two persons.

[www.graceconstruction.com](http://www.graceconstruction.com)

For technical assistance call toll free at 866-333-3SBM (3726)

Adcor is a trademark and Preprufe, Bituthene and Hydroduct are registered trademarks of W. R. Grace & Co.—Conn. Procor is a U.S. registered trademark of W. R. Grace & Co.—Conn., and is used in Canada under license from PROCOR LIMITED.

We hope the information here will be helpful. It is based on data and knowledge considered to be true and accurate and is offered for the users' consideration, investigation and verification, but we do not warrant the results to be obtained. Please read all statements, recommendations or suggestions in conjunction with our conditions of sale, which apply to all goods supplied by us. No statement, recommendation or suggestion is intended for any use which would infringe any patent or copyright. W. R. Grace & Co.—Conn., 62 Whittemore Avenue, Cambridge, MA 02140. In Canada, Grace Canada, Inc., 294 Clements Road, West, Ajax, Ontario, Canada L1S 3C6.

This product may be covered by patents or patents pending.  
PF-111H Printed in U.S.A. 07/12

Copyright 2012. W. R. Grace & Co.—Conn.  
FA/PDF

**GRACE**

## BITUTHENE® 3000 AND BITUTHENE LOW TEMPERATURE

Self-adhesive, rubberized asphalt/polyethylene waterproofing membranes for basements and sub-structures

### Description

Bituthene® 3000 and Bituthene Low Temperature are self-adhesive, rubberized asphalt/polyethylene waterproofing membranes used in basements and sub-structures.

### Advantages

- **Waterproof**—high hydrostatic head resistance
- **Cross laminated film**—provides dimensional stability, high tear strength, puncture and impact resistance
- **Cold applied**—no flame hazard; self-adhesive overlaps ensure continuity
- **Chemically resistant**—provides effective external protection against aggressive soils and ground water
- **Flexible**—accommodates minor settlement and shrinkage movement
- **Controlled thickness**—factory made sheet ensures constant, non-variable site application
- **Wide application window**—
  - **Bituthene Low Temperature** surface and ambient temperatures between 25°F (-4°C) and 60°F (16°C)
  - **Bituthene 3000** surface and ambient temperatures at 40°F (5°C) or above

- **Ripcord® split release on demand**—faster application in the straight-aways, ease of membrane positioning in detailed areas


### Use

Bituthene is ideal for waterproofing concrete, masonry and wood surfaces where in-service temperatures will not exceed 130°F (54°C). It can be applied to foundation walls, tunnels, earth sheltered structures and split slab construction, both above and below grade. (For above grade applications, see *Above Grade Waterproofing Bituthene 3000 and Bituthene Low Temperature.*)

Bituthene is 1/16 in. (1.5 mm) thick, 3 ft (0.9 m) wide and 66.7 ft (20 m) long and is supplied in rolls. It is unrolled sticky side down onto concrete slabs or applied onto vertical concrete faces primed with Bituthene Primer WP-3000, Primer B2 or Primer B2 LVC. Continuity is achieved by overlapping a minimum 2 in. (50 mm) and firmly rolling the joint.

### Product Advantages

- Waterproof
- Cross laminated film
- Cold applied
- Chemically resistant
- Flexible
- Controlled thickness
- Wide application window
- Ripcord split release on demand

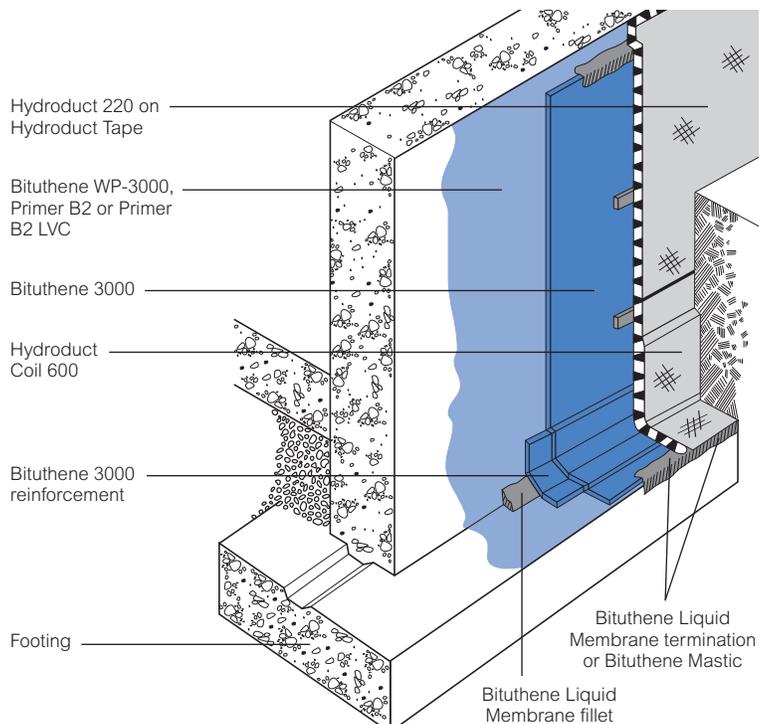

Drawings are for illustration purposes only. Please refer to [graceconstruction.com](http://graceconstruction.com) for specific application details.

Bituthene is extremely flexible. It is capable of bridging shrinkage cracks in the concrete and will accommodate minor differential movement throughout the service life of the structure.

## Application Procedures

### Safety, Storage and Handling Information

Bituthene products must be handled properly. Vapors from solvent-based primers and mastic are harmful and flammable. For these products, the best available information on safe handling, storage, personal protection, health and environmental considerations has been gathered. Material Safety Data Sheets (MSDS) are available at [graceconstruction.com](http://graceconstruction.com) and users should acquaint themselves with this information. Carefully read detailed precaution statements on product labels and the MSDS before use.

### Surface Preparation

Surfaces should be structurally sound and free of voids, spalled areas, loose aggregate and sharp protrusions. Remove contaminants such as grease, oil and wax from exposed surfaces. Remove dust, dirt, loose stone and debris. Concrete must be properly dried (minimum 7 days for normal structural concrete and 14 days for lightweight structural concrete).

**If time is critical, Bituthene Primer B2 or Bituthene Primer B2 LVC may be used to allow priming and installation of membrane on damp surfaces or green concrete. Priming may begin in this case as soon as the concrete will maintain structural integrity.** Use form release agents which will not transfer to the concrete. Remove forms as soon as possible from below horizontal slabs to prevent entrapment of excess moisture. Excess moisture may lead to blistering of the membrane. Cure concrete with clear, resin-based curing compounds which do not contain oil, wax or pigment. Except with Primer B2 or Primer B2 LVC, allow concrete to thoroughly dry following rain. Do not apply any products to frozen concrete.

Repair defects such as spalled or poorly consolidated areas. Remove sharp protrusions and form match lines. On masonry surfaces, apply a parge coat to rough concrete block and brick walls or trowel cut mortar joints flush to the face of the concrete blocks.

### Temperature

- Apply Bituthene 3000 Membrane only in dry weather and at air and surface temperatures of 40°F (5°C) and above.
- Apply Bituthene Low Temperature Membrane only in dry weather and when air and surface temperatures are between 25°F (-4°C) and 60°F (16°C).
- Apply Bituthene Primer WP-3000 in dry weather above 40°F (5°C).

- Apply Bituthene Primer B2 in dry weather above 25°F (-4°C). (See separate product information sheet.)

### Priming

- Apply Bituthene Primer WP-3000 by spray or roller at a coverage rate of 500–600 ft<sup>2</sup>/gal (12–15 m<sup>2</sup>/L). Allow to dry one hour or until concrete returns to original color.
- Apply Bituthene Primer B2 by a lamb's wool roller at a coverage rate of 250–350 ft<sup>2</sup>/gal (6–8 m<sup>2</sup>/L). Allow primer to dry one hour or until tack-free.
- Apply Bituthene Primer B2 LVC by a lamb's wool roller at a coverage rate of 325–425 ft<sup>2</sup>/gal (7.5–10 m<sup>2</sup>/L). Allow primer to dry one hour or until tack free.
- Dry time may be longer in cold temperatures. Reprime areas if contaminated by dust. If the work area is dusty, apply membrane as soon as the primer is dry.
- **Do not apply any primer to Bituthene membrane.**

### Corner Details

The treatment of corners varies depending on the location of the corner. For detailed information on Bituthene Liquid Membrane, see separate product information sheet.

- At wall to footing inside corners—
  - Option 1:** Apply membrane to within 1 in. (25 mm) of base of wall. Treat the inside corner by installing a ¾ in. (20 mm) fillet of Bituthene Liquid Membrane. Extend Bituthene Liquid Membrane at least 2½ in. (65 mm) onto footing, and 2½ in. (65 mm) onto wall membrane.
  - Option 2:** Treat the inside corner by installing a ¾ in. (20 mm) fillet of Bituthene Liquid Membrane. Apply 12 in. (300 mm) wide strip of sheet membrane centered over fillet. Apply wall membrane over inside corner and extend 6 in. (150 mm) onto footing. Apply 1 in. (25 mm) wide troweling of Bituthene Liquid Membrane over all terminations and seams within 12 in. (300 mm) of corner.
- At footings where the elevation of the floor slab is 6 in. (150 mm) or more above the footing, treat the inside corner either by the above two methods or terminate the membrane at the base of the wall. Seal the termination with Bituthene Liquid Membrane.

### Joints

Properly seal all joints with waterstop, joint filler and sealant as required. Bituthene membranes are not intended to function as the primary joint seal. Allow sealants to fully cure. Pre-strip all slab and wall cracks over ¼ in. (1.5 mm) wide and all construction and control joints with 9 in. (230 mm) wide sheet membrane strip.

## Application on Horizontal Surfaces

(Note: Preprufe® pre-applied membranes are strongly recommended for below slab or for any application where the membrane is applied before concreting. See Preprufe product information sheets.)

Apply membrane from the low point to the high point so that laps shed water. Overlap all seams at least 2 in. (50 mm). Stagger all end laps. Roll the entire membrane firmly and completely as soon as possible. Use a linoleum roller or standard water-filled garden roller less than 30 in. (760 mm) wide, weighing a minimum of 75 lbs (34 kg) when filled. Cover the face of the roller with a resilient material such as a ½ in. (13 mm) plastic foam or two wraps of indoor-outdoor carpet to allow the membrane to fully contact the primed substrate. Seal all T-joints and membrane terminations with Bituthene Liquid Membrane at the end of the day.

## Protrusions and Drains

Apply membrane to within 1 in. (25 mm) of the base of the protrusion. Apply Bituthene Liquid Membrane 0.1 in. (2.5 mm) thick around protrusion. Bituthene Liquid Membrane should extend over the membrane a minimum of 2½ in. (65 mm) and up the penetration to just below the finished height of the wearing course.

## Vertical Surfaces

Apply membrane in lengths up to 8 ft (2.5 m). Overlap all seams at least 2 in. (50 mm). On higher walls apply membrane in two or more sections with the upper overlapping the lower by at least 2 in. (50 mm). Roll all membrane with a hand roller.

Terminate the membrane at grade level. Press the membrane firmly to the wall with the butt end of a hardwood tool such as a hammer handle or secure into a reglet. Failure to use heavy pressure at terminations can result in a poor seal. A termination bar may be used to ensure a tight seal. Terminate the membrane at the base of the wall if the bottom of the interior floor slab is at least 6 in. (150 mm) above the footing. Otherwise, use appropriate inside corner detail where the wall and footing meet.

## Membrane Repairs

Patch tears and inadequately lapped seams with membrane. Clean membrane with a damp cloth and dry. Slit fishmouths and repair with a patch extending 6 in. (150 mm) in all directions from the slit and seal edges of the patch with Bituthene Liquid Membrane. Inspect the membrane thoroughly before covering and make any repairs.

## Drainage

Hydroduct® drainage composites are recommended for both active drainage and protection of the membrane. See Hydroduct product information sheets.

## Protection of Membrane

Protect Bituthene membranes to avoid damage from other trades, construction materials or backfill. Place protection immediately in temperatures above 77°F (25°C) to avoid potential for blisters.

- On vertical applications, use Hydroduct 220 Drainage Composite. Adhere Hydroduct 220 Drainage Composite to membrane with Hydroduct Tape. Alternative methods of protection are to use ¼ in. (6 mm) asphalt impregnated board or 1 in. (25 mm) extruded polystyrene. Such alternatives do not provide positive drainage to the system. Adhere protection board with an adhesive or Hydroduct Tape.
- In mud slab waterproofing, or other applications where positive drainage is not desired and where reinforced concrete slabs are placed over the membrane, the use of ¼ in. (6 mm) hardboard or 2 layers of ⅛ in. (3 mm) hardboard is recommended.

## Insulation

Always apply Bituthene membrane directly to primed or conditioned structural substrates. Insulation, if used, must be applied over the membrane. Do not apply Bituthene membranes over lightweight insulating concrete.

## Backfill

Place backfill as soon as possible. Use care during backfill operation to avoid damage to the waterproofing system. Follow generally accepted practices for backfilling and compaction. Backfill should be added and compacted in 6 in. (150 mm) to 12 in. (300 mm) lifts.

For areas which cannot be fully compacted, a termination bar is recommended across the top termination of the membrane.

## Placing Steel

When placing steel over properly protected membrane, use concrete bar supports (dobies) or chairs with plastic tips or rolled feet to prevent damage from sharp edges. Use special care when using wire mesh, especially if the mesh is curled.

## Approvals

- City of Los Angeles Research Report RR 24386
- U.S. Department of Housing and Urban Development (HUD) HUD Materials Release 628E

## Warranty

Five year material warranties covering Bituthene and Hydroduct products are available upon request. Contact your Grace sales representative for details.

## Technical Services

Support is provided by full time, technically trained Grace representatives and technical service personnel, backed by a central research and development staff.

## Supply

<b>Bituthene 3000 or Bituthene Low Temperature</b> Roll weight Palletization Storage	3 ft x 66.7 ft roll (200 ft <sup>2</sup> ) [0.9 m x 20 m (18.6 m <sup>2</sup> )] 83 lbs (38 kg) gross 25 rolls per pallet Store upright in dry conditions below 95°F (+35°C).
<b>Ancillary Products</b>	
Bituthene WP-3000	5 gal (18.9 L) pail/24 pails per pallet
Bituthene Primer B2	5 gal (18.9 L) pail/48 pails per pallet
Bituthene Primer B2 LVC	5 gal (18.9 L) pail/48 pails per pallet
Bituthene Liquid Membrane	1.5 gal (5.7 L) pail/100 pails per pallet or 4 gal (15.1 L) pail/24 pails per pallet
Hydroduct Tape	1 in. x 200 ft (2.5 cm x 61.0 m) roll/6 rolls per carton
Bituthene Mastic	Twelve 30 oz (0.9 L) tubes/carton or 5 gal (18.9 L) pail/36 pails per pallet

**Equipment by others:** Soft broom, utility knife, brush or roller for priming

## Physical Properties for Bituthene Membrane

Property	Typical Value	Test Method
Color	Dark gray-black	
Thickness	1/16 in. (1.5 mm) nominal	ASTM D3767—method A
Flexibility, 180° bend over 1 in. (25 mm) mandrel at -25°F (-32°C)	Unaffected	ASTM D1970
Tensile strength, membrane, die C	325 lbs/in. <sup>2</sup> (2240 kPa) minimum	ASTM D412 modified <sup>1</sup>
Tensile strength, film	5,000 lbs/in. <sup>2</sup> (34.5 MPa) minimum	ASTM D882 modified <sup>1</sup>
Elongation, ultimate failure of rubberized asphalt	300% minimum	ASTM D412 modified <sup>1</sup>
Crack cycling at -25°F (-32°C), 100 cycles	Unaffected	ASTM C836
Lap adhesion at minimum application temperature	3000: 4 lbs/in. (700 N/m) Low Temp: 5 lbs/in. (880 N/m)	ASTM D1876 modified <sup>2</sup>
Peel strength	9 lbs/in. (1576 N/m)	ASTM D903 modified <sup>3</sup>
Puncture resistance, membrane	50 lbs (222 N) minimum	ASTM E154
Resistance to hydrostatic head	200 ft (60 m) of water	ASTM D5385
Permeance	0.05 perms (2.9 ng/m <sup>2</sup> sPa) maximum	ASTM E96, section 12—water method
Water absorption	0.1% maximum	ASTM D570

### Footnotes:

1. The test is run at a rate of 2 in. (50 mm) per minute.
2. The test is conducted 15 minutes after the lap is formed and run at a rate of 2 in. (50 mm) per minute at 40°F (5°C).
3. The 180° peel strength is run at a rate of 12 in. (300 mm) per minute.

[www.graceconstruction.com](http://www.graceconstruction.com)

**For technical assistance call toll free at 866-333-3SBM (3726)**

Bituthene, Preprufe, Ripcord and Hydroduct are registered trademarks of W. R. Grace & Co.—Conn.

We hope the information here will be helpful. It is based on data and knowledge considered to be true and accurate and is offered for the users' consideration, investigation and verification, but we do not warrant the results to be obtained. Please read all statements, recommendations or suggestions in conjunction with our conditions of sale, which apply to all goods supplied by us. No statement, recommendation or suggestion is intended for any use which would infringe any patent or copyright. W. R. Grace & Co.—Conn., 62 Whittemore Avenue, Cambridge, MA 02140. In Canada, Grace Canada, Inc., 294 Clements Road, West, Ajax, Ontario, Canada L1S 3C6.

This product may be covered by patents or patents pending.  
BIT-210F Printed in U.S.A. 9/08


Copyright 2007. W. R. Grace & Co.—Conn.  
FA/LVI/1M

**GRACE**




**PARTITION TYPES**


PARTITION	RATING	PARTITION	RATING	PARTITION	RATING
1. 8" CONC. BLOCK CLASSIFICATION D-2 FILL VOIDS AT DECKING W/FIRE SAFING INSUL. PART. HT. TO UNDERSIDE OF FLOOR/ROOF STRUCTURE ABOVE NOTE: SEE STRUCT. DNGS FOR REINFORCEMENT DETAILS	1 HR. REQUIRED 2 HR. PROVIDED UL DESIGN #1406	2A. SAME AS PARTITION TYPE 2 W/6" CONC. BLOCK NOTE: STC RATINGS OF 63	2 HR. PROVIDED UL DESIGN #1414	4. 3-5/8" 20 GA METAL STUDS @ 16" O.C. W/5/8" GYP. BD. @ BOTH FACES W/3" BATT INSULATION PART. HT. TO UNDERSIDE OF FLOOR STRUCTURE ABOVE GENERAL PARTITION NOTES: 1. SEE UL DESIGN ASSEMBLIES FOR DETAILED PARTITION INFORMATION 2. SIZE & GAUGE OF STUDS LISTED SHALL BE AS DETERMINED BY MANUFACTURER'S HEIGHT LIMITATIONS FOR NON-BEARING INTERIOR WALLS AND 5 PSF. WIND LOAD. 3. PROVIDE WATER RESISTANT GYPSUM BOARD AT ALL MET AREAS. 4. SEE STRUCTURAL DRAWINGS FOR REINFORCING DETAILS.	1 HR. REQUIRED UL DESIGN #414
2. 1-5/8" 20 GA METAL STUDS @ 16" O.C. W/5/8" GYP. BD. HELD TIGHT TO 8" CONC. BLOCK CLASSIFICATION D-2 FILL VOIDS AT DECKING W/FIRE SAFING INSUL. PART. HT. TO UNDERSIDE OF FLOOR/ROOF STRUCTURE ABOVE NOTE: SEE STRUCT. DNGS FOR REINFORCEMENT DETAILS	1 HR. REQUIRED 2 HR. PROVIDED UL DESIGN #1406	3. 6" 20 GA METAL STUDS @ 16" O.C. W/2" LAYERS 5/8" GYP. BD. @ BOTH FACES AND RESILIENT CHANNEL ON ONE SIDE W/5" MINERAL WOOL BATT PART. HT. TO UNDERSIDE OF FLOOR STRUCTURE ABOVE NOTE: STC RATINGS OF 63	2 HR. PROVIDED UL DESIGN #1414		

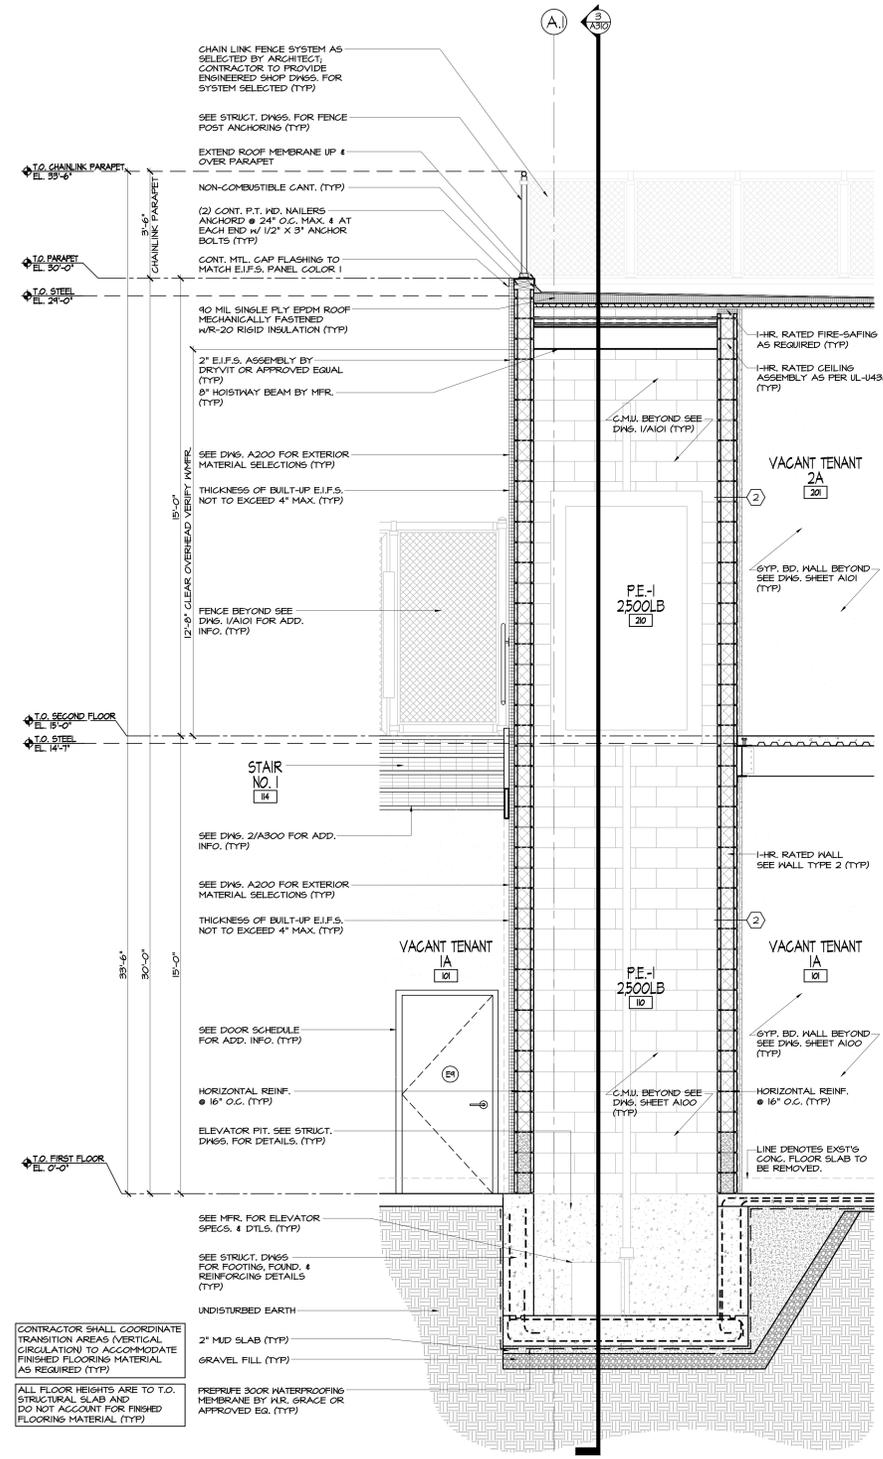


**4 PE-1 SECTION**  
1/2" = 1'-0"

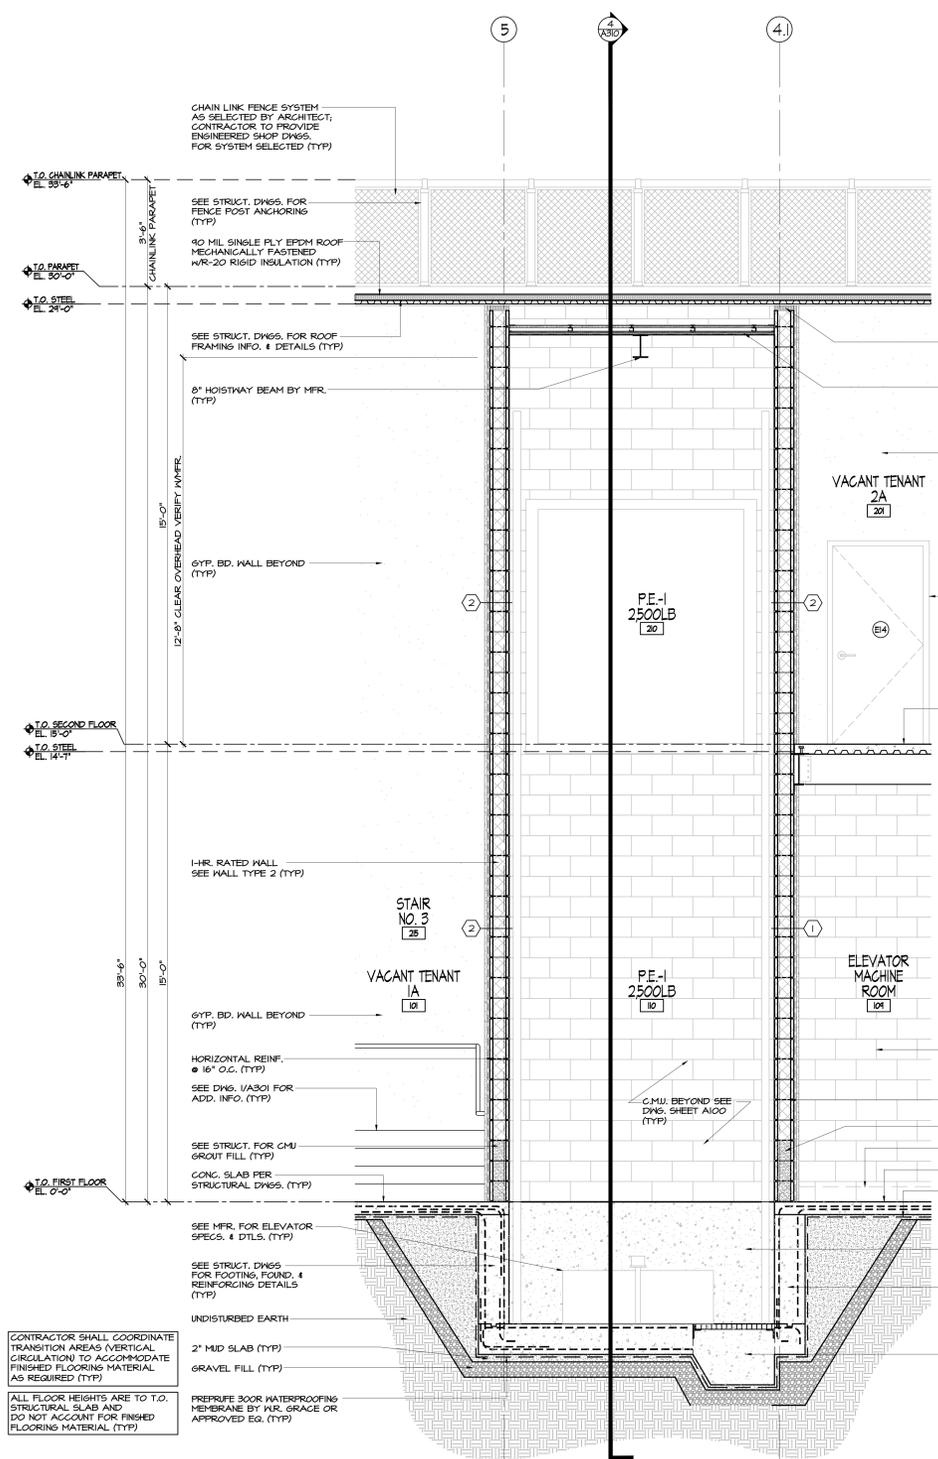

**3 PE-1 SECTION**  
1/2" = 1'-0"

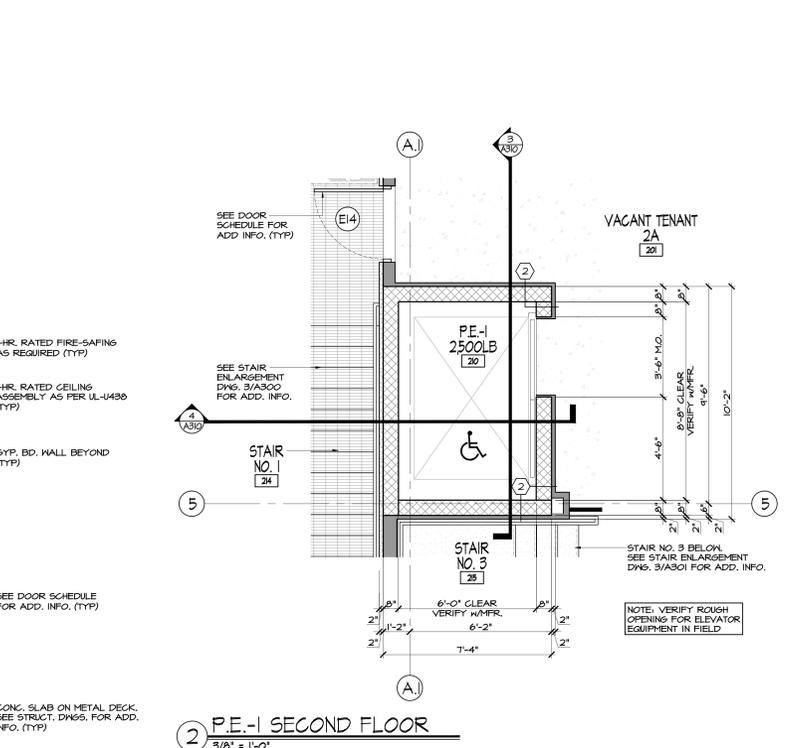

**2 PE-1 SECOND FLOOR**  
3/8" = 1'-0"

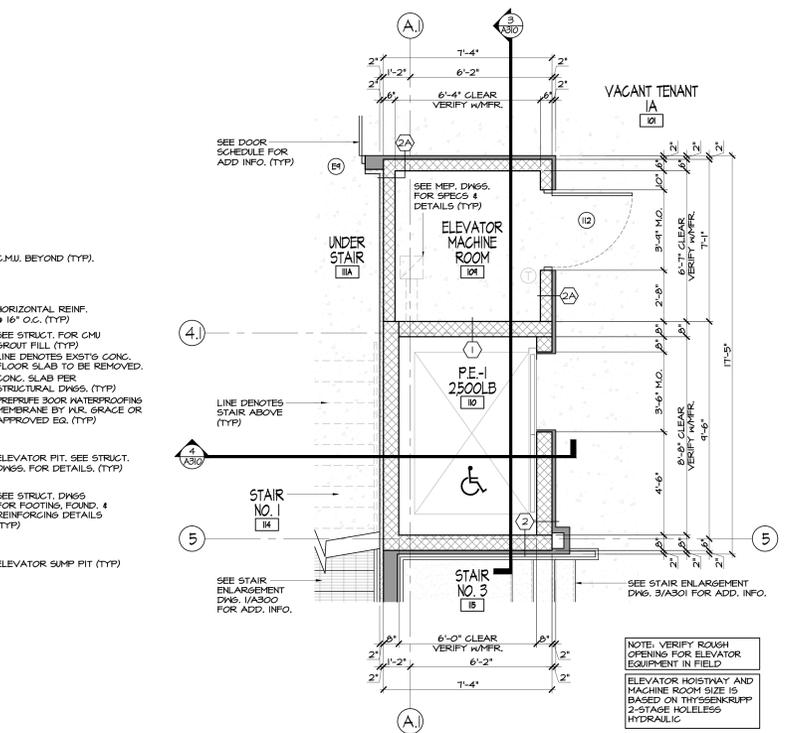

**1 PE-1 FIRST FLOOR**  
3/8" = 1'-0"



**GAMBINO + LAPORTA**  
ARCHITECTURE, DPC  
1298 RICHMOND ROAD STATION ISLAND, NY 10304  
PHONE: 718-667-6682 FAX: 718-667-1196 | EMAIL: STUDIO@GLA-ARCH.COM  
WWW.G.L.A.R.C.H.C.O.M

---

9029-9049 FLATLANDS AVENUE  
BLOCK NO. 911P  
4924-9049 FLATLANDS AVENUE  
BROOKLYN, NY 11236  
BIN NO. 522101  
POLIZOTTO REALTY  
6911 18TH AVENUE  
BROOKLYN, NY 11234

---

PROJECT NO. 15DEC14 DRAWING NO. 6LA14-0210 DATE 12/15/14 SCALE AS NOTED SHEET NO. A310.00 OF 34	PROJECT NO. 15DEC14 DRAWING NO. 6LA14-0210 DATE 12/15/14 SCALE AS NOTED SHEET NO. A310.00 OF 34
--	--




STEVEN GAWING, P.E.  
REGISTERED ARCHITECT  
STATE OF NEW YORK  
NO. 13178




**GAMBINO + LAPORTA**  
**ARCHITECTURE, DPC**  
 1298 RICHMOND ROAD STATION ISLAND, NY 10304  
 PHONE: 718.667.6682 FAX: 718.667.1196 | EMAIL: STUDIO@G-L-ARCH.COM


WWW.G.L.A.R.C.H.COM

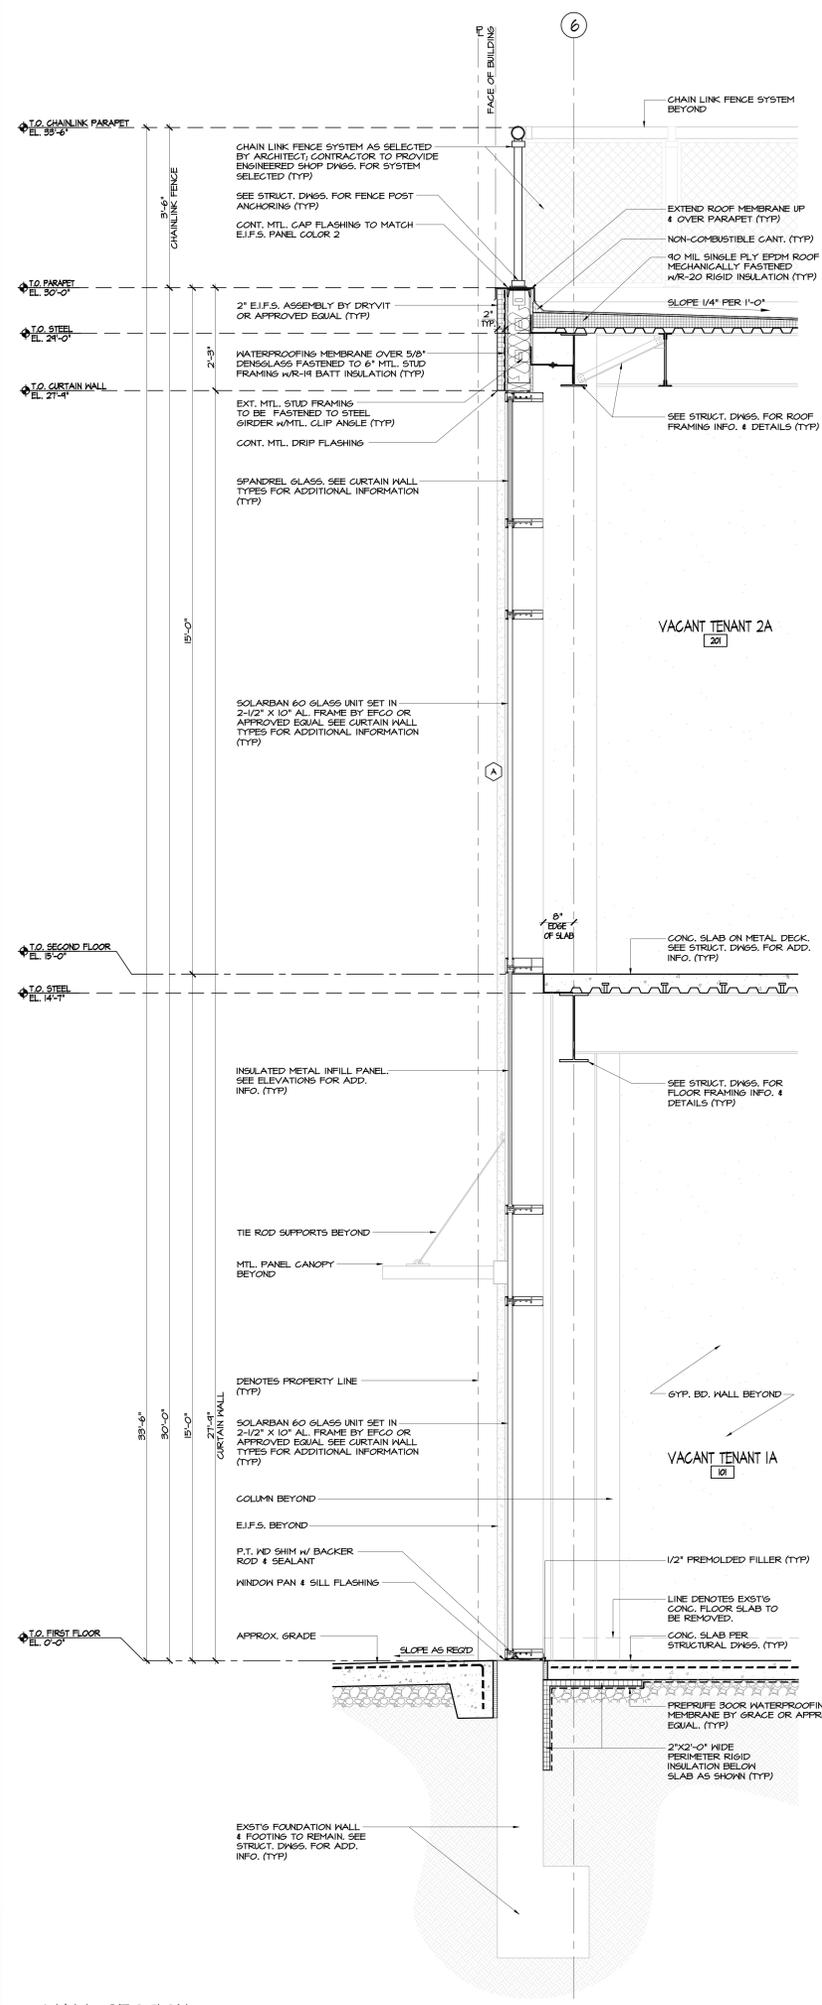

3 WALL SECTION  
 3/4" = 1'-0"

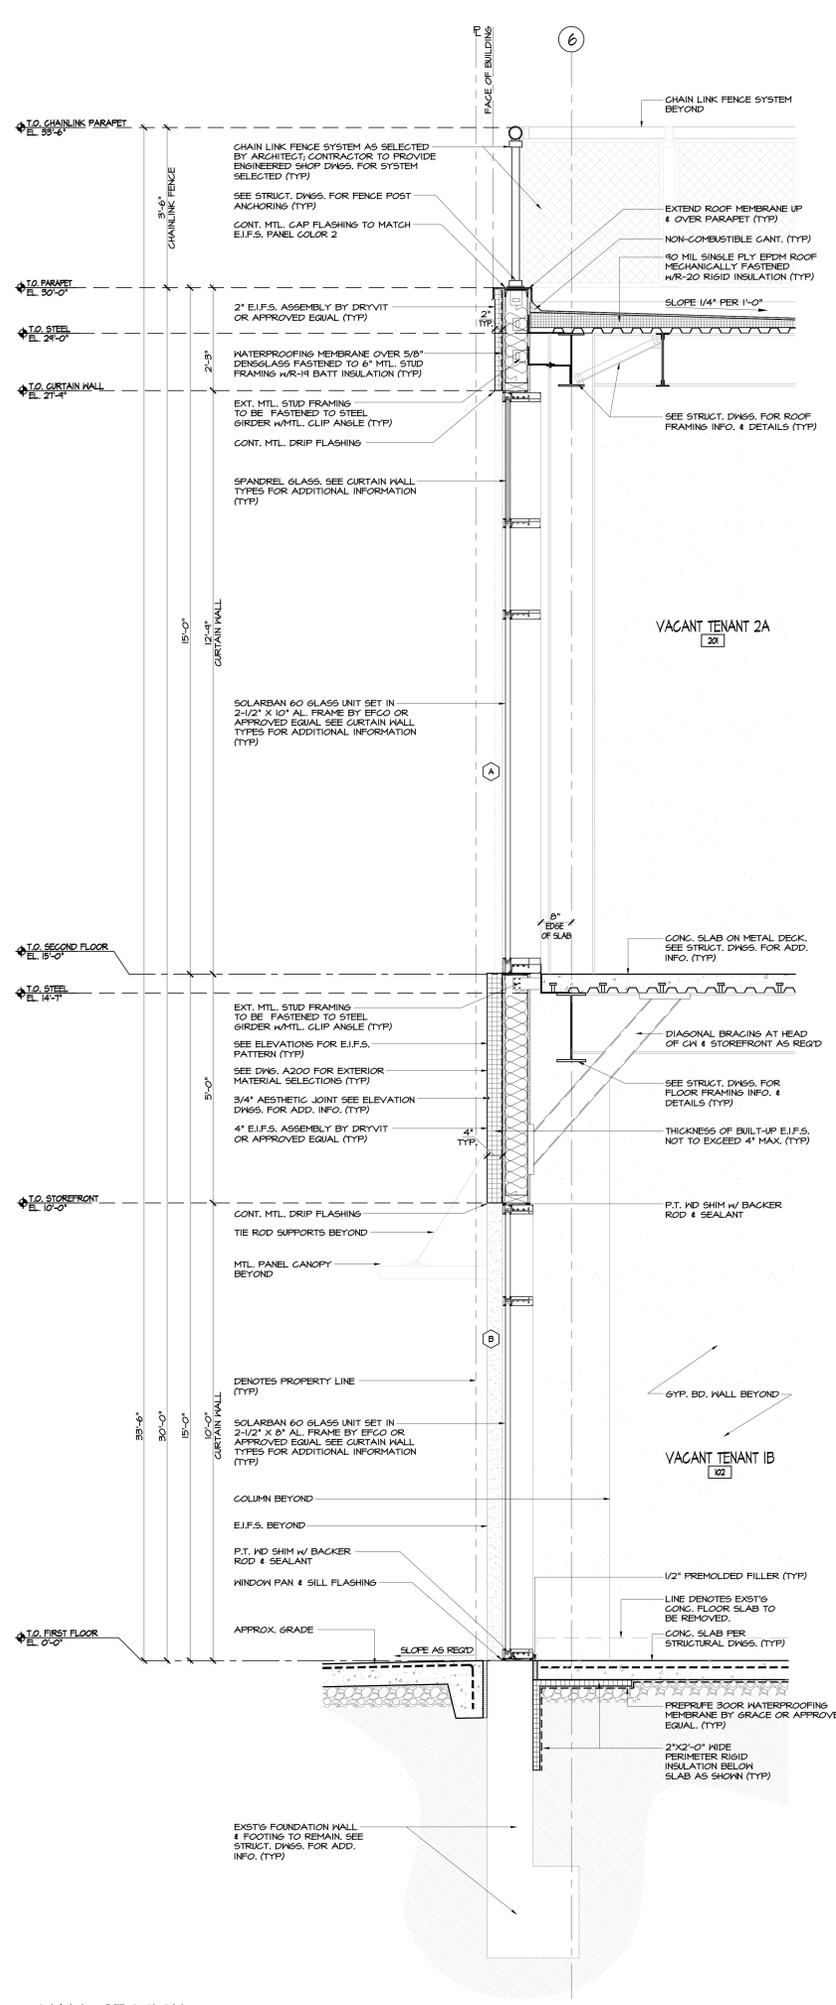

2 WALL SECTION  
 3/4" = 1'-0"

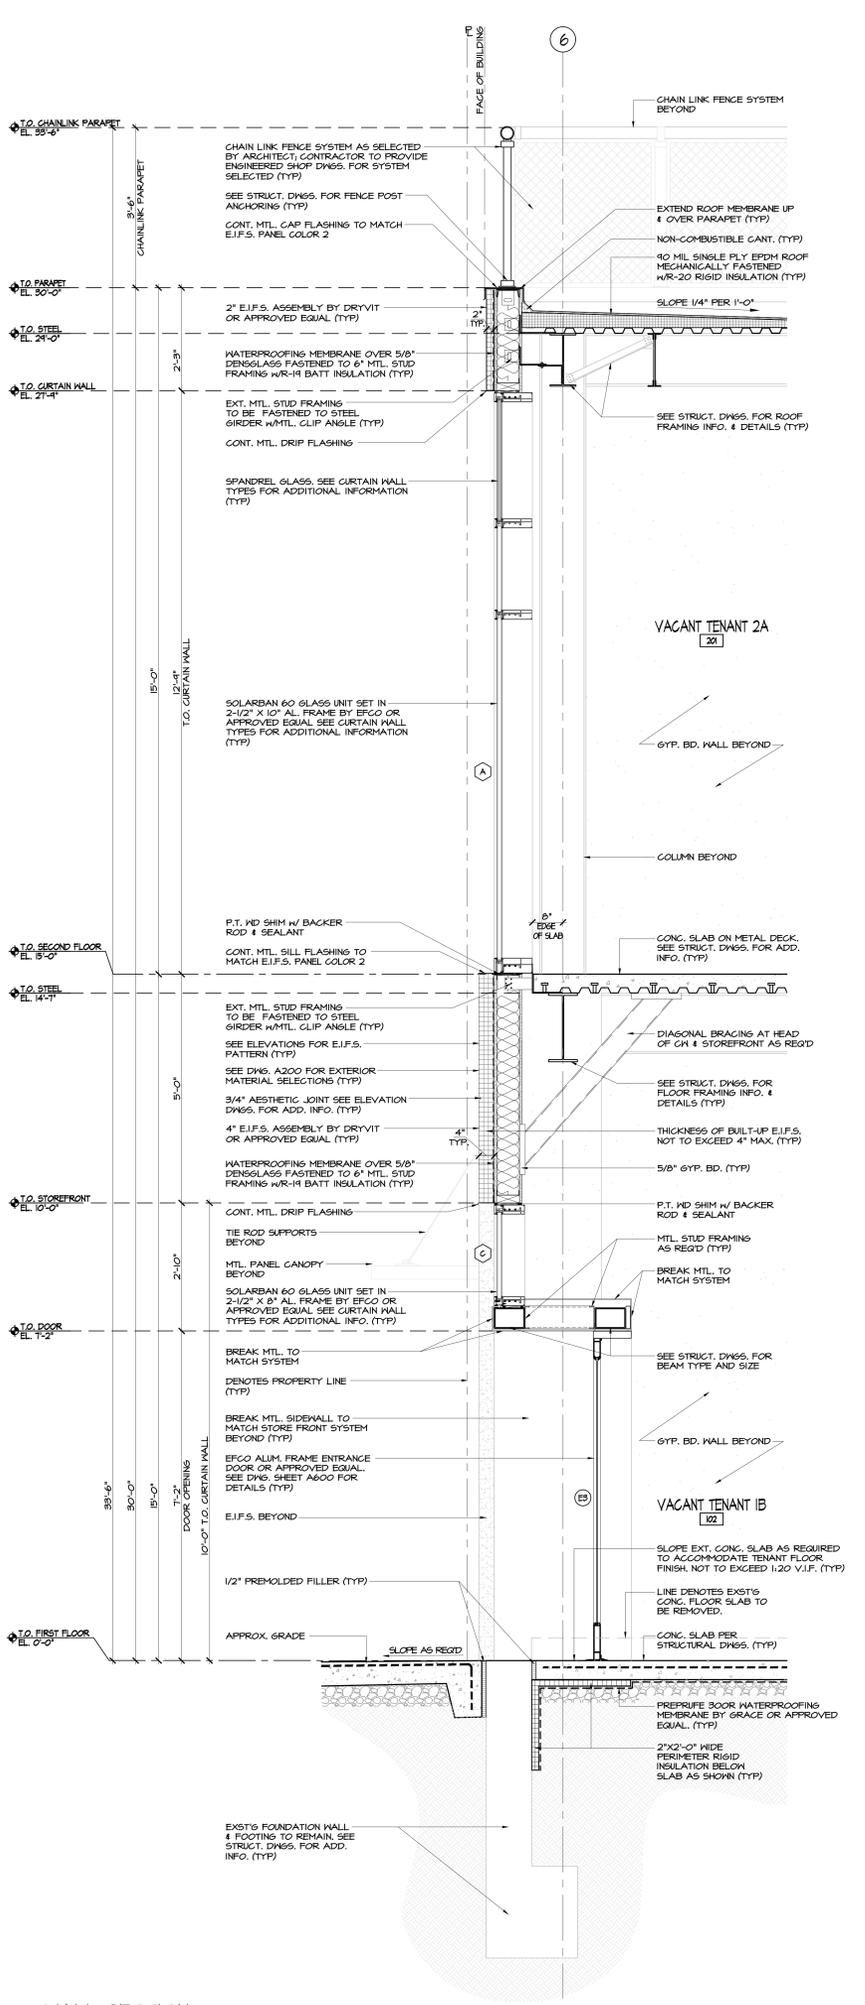

1 WALL SECTION  
 3/4" = 1'-0"

NO.	DATE	REVISION	DESCRIPTION
1			ISSUED FOR A TENANT TYPE (BUILDING PERMIT)

9024 FLATLANDS AVENUE  
 BLOCK NO. 917P  
 156 EAST 42ND STREET  
 BROOKLYN, NY 11236  
 BIN NO. 522701

POLIZOTTO REALTY  
 6911 18TH AVENUE  
 BROOKLYN, NY 11234



PROJECT NO.	15DEC14	6LA14-0270
DATE		
SCALE	AS NOTED	
SHEET NO.	A500.00	
TOTAL SHEETS	35 OF 34	



**GAMBINO + LAPORTA**  
**ARCHITECTURE, DPC**  
 1298 RICHMOND ROAD STATEN ISLAND, NY 10304  
 PHONE: 718.667.6682 FAX: 718.667.1196 EMAIL: STUDIO@GLA-ARCH.COM  
 WWW.GLARCH.COM

NO.	DATE	REVISION	DESCRIPTION
1	08/14/2024		ISSUED FOR A TENANT TYPE (BUILDING PERMIT)

9029 FLATLANDS AVENUE  
 BLOCK NO. 917H  
 LOT NO. 2221H  
 POLIZZOTTO REALTY  
 6911 12TH AVENUE  
 BROOKLYN, NY 11224

REGISTERED ARCHITECT  
 STATE OF NEW YORK  
 2017

PROJECT NO. 15DEC14 6LAI4-0270  
 DRAWN BY: M.L.  
 CHECKED BY: T.J.L.  
 SHEET NO. A501.00  
 SHEET NO. 34 OF 34

